

Job/Location: _____
Contractor: _____
Prepared By: _____

Job Type: _____
Date: _____




■ specifications: internal

The PACO uses a rechargeable, maintenance free nickel cadmium battery. Configured with 120/277V input. The circuit board features an onboard solid state transformer, low voltage disconnect and brownout protection.

■ specifications: external

The PACO is constructed from high impact, UV-stabilized, UL 94 V-0 plastic. The Paco comes standard in a white finish, option for black is available. Two fully adjustable 1.5W LED lamp heads ensure emergency lighting performance, accurate positioning and reduced maintenance. Universal mounting plate and quick snap design speeds installation. Easy field wiring & durable construction suitable for surface wall or ceiling installations.

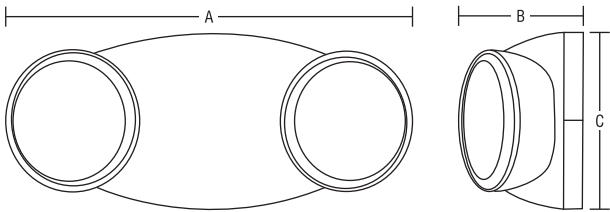

Series	A	B	C
PEH-1	9" 229mm	3.25" 83mm	4.75" 121mm

■ ordering logic

Series	Options
PEH-1	AT (autotest) B (black finish) RC¹ (remote capable)

NOTE 1: Max load per unit: 3.4W

EXAMPLE: PEH-1-B
DESCRIPTION: emergency only, black housing

■ emergency heads

PACO is remote capable of operating 2, single head remotes or 1 double head remote. Max load per unit: 3.4W. Remote heads are available.

■ specifications: electrical

BATTERY: The PACO uses a rechargeable, maintenance free 3.6V 900mAH nickel cadmium battery that provides minimum emergency duration of 90 minutes. The recharge time of the battery is 24 hours. The maximum working temperature is 45°C. The minimum working temperature is 10°C.

■ specifications: mechanical

The PACO ideal for use in hotels, offices, restaurants and other commercial applications. The Paco features a quick snap design the reduces installation time. Easy field wiring & durable construction is suitable for surface wall or ceiling installations.

■ autotest

The Beghelli autotest function is factory preset without any allowable field adjustment. The automatic self-diagnostic feature serves the following tests:

- On-line real time monitoring of battery and lamps (both local and remote): identifies battery charging, disconnection and failure along with local and remote lamp failures.
- Self-testing and a 15-minute discharge once in every 30 days, after AC power has been supplied for a minimum of 24hrs.
- Self-testing and a 90-minute discharge once in every year, after AC power has been supplied for a minimum of 24hrs.

■ warranty

The PACO comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

■ photometrics

