


Combination Starters

Class 8538/8539, 8738/8739



CONTENTS

Description	Page
General Information	2
Combination Starters — NEMA Rated	3
Application Data	12
Approximate Dimensions and Shipping Weights	17
Panel Layout Drawings	20
Reversing Combination Starters — NEMA Rated	21
Application Data	27
Approximate Dimensions	28
Panel Layout Drawings	29
Factory Modifications	30
Replacement Parts Kits	38
Coils and Accessories	Refer to Catalog 9999CT9701



General Information

Class 8538 and 8539 Type S combination starters combine the requirements of motor overload and short circuit protection into one package. These starters are manufactured in accordance with NEMA standards and are UL Listed (although some FORM numbers may not be listed – contact your local Square D representative for information). Class 8538 and 8539 combination starters are designed to operate at 600 Vac maximum, 50 to 60 Hz – and are supplied with melting alloy overload relays as standard.

Type 2 Coordination

Square D is one of the leaders in North America and Europe in providing starters that are verified by UL to comply with IEC 947-4-1 and Type 2 coordination. This means that the components of a motor branch circuit protective device (fuses and circuit breaker), contactor, and overload relay will be suitable for further use following a short circuit fault (even though contact welding is recognized but can be easily broken) allowing for replacement of components during normal scheduled maintenance.

Square D starters and specified fuses have been tested by UL and CSA (at 100,000 Amps fault current) for operation at 600 volts AC. Class 8538 Type S Combination Starters, NEMA size 0 through 5, with fusible disconnect switches have tested to Type 2 performance criteria.

Class 8538 Disconnect Switch Type



Class 8538 combination starters can be supplied with either a fusible or non-fusible disconnect switch. Class 8538 combination starters are available in NEMA Sizes 0-6.

The fusible disconnect switch type combination starter design utilizes a flange operated visible blade switch. Interchangeable fuse clips, straight through wiring, space for a fused control transformer with additional capacity, and provisions for adding a disconnect switch electrical interlock are key features of the combination starters.


The fusible disconnect switch type can be supplied with Class R fuse clips increasing the short-circuit rating to 100,000A.

Size 0-2 non-fusible combination starters can be converted to a fusible type. See Catalog 999CT9701 for fuse block kits and fuse clips.

Class 8539 MAG-GARD® Motor Circuit Protector or Thermal Magnetic Circuit Breaker

Class 8539 combination starters can be supplied with either a MAG-GARD® motor circuit protector (MCP) or a thermal magnetic circuit breaker. Class 8539 combination starters are available in NEMA Sizes 0-7.

The circuit breakers in Class 8539 combination starters can be supplied with a factory installed auxiliary switch for remote indication of an open and/or tripped or closed breaker. For one auxiliary switch, specify **Form Y74**. For two auxiliary switches, specify **Form Y75**. The switches are supplied with normally open and normally closed circuits with a common connection. Contacts must be used on the same polarity and are rated 15 Amps at 240 Volts AC.



An alarm switch can be factory supplied only, specify **Form Y742**. The alarm switch only operates when the breaker is tripped. It is used to actuate bell alarms and warning lights. The alarm switch consists of a normally open single pole single throw switch. The contacts are rated 4 Amps at 240 Volts AC.

Enclosures – Class 8538 and 8539 combination starters are available in the following enclosures:

NEMA Type 1 General Purpose

NEMA Type 4 & 4X Watertight and Dusttight Stainless Steel

NEMA Type 4X Watertight, Dusttight, and Corrosion Resistant Glass-Polyester

NEMA Type 7 & 9 Bolted and Spin-Top® for Hazardous Locations (Class 8539 only).

NEMA Type 12 Dusttight and Driptight for Industrial Use

The NEMA Type 4 & 4X stainless steel enclosure (Sizes 0 - 5) has a brushed finish. Sizes 6 & 7 are painted sheet steel enclosures and are rated NEMA Type 4 only. For an electropolished finish, specify **Form G16** and add 15% to the price of the standard device. Hubs are supplied as standard on NEMA Type 4 & 4X enclosures.

Hubs are supplied as standard on NEMA Type 4X enclosures.

NEMA Type 12 enclosures may be field modified for outdoor applications. Specify **Form G26** for NEMA Type 3R (no additional charge). See Catalog 9999CT9701 for additional information. Also, NEMA Type 12 devices are available UL Listed for use in Class II, Division 2, Group G and Class III, Divisions 1 and 2 locations. Request **Form G21** (no additional charge).

Oversized Enclosures – Class 8538 disconnect switch type and Class 8539 MAG-GARD® MCP (Sizes 0-2) are available in NEMA Type 1, 4 & 4X and 12 enclosures. The oversized enclosures provide additional panel

space for customer installation of control transformers, fuse blocks, terminal blocks, relays, and other auxiliary equipment. These enclosures have three Class 9001 Type “K” holes as standard for installation of push buttons, pilot lights, and other cover mounted control units.

Coil Voltages – AC coils are available for application on 50-60 Hz. NEMA Sizes 00 - 5 are supplied with coils that are designed to operate satisfactorily on line voltages of 85% - 110% of rated voltage. NEMA Size 6 and 7 contactors are supplied with a DC coil operated by a solid state rectifier circuit that is powered by an AC source and is designed to operate satisfactorily on line voltages of 90-110% of rated voltage.

Please note that Voltage Codes have been added to the Type designations in order to improve customer service. It is necessary to include the Voltage Code when ordering combination starters. Also, 120 Volt polyphase combination starters will be wired for separate control.

Auxiliary Contacts – Additional auxiliary contacts may be added to Type S starters. Refer to Page 14 for maximum number of auxiliary units and Form designations for factory installed auxiliary contacts. See Catalog 9999CT9701 for auxiliary contact kits for field installation.

Type S Accessories – Additional accessories such as fuse blocks, fuse clip kits, disconnect switch and circuit breaker interlocks, and cover mounted control stations are available for field modifications, see Catalog 9999CT9701. For factory modifications (Forms), see Pages 30-34.



Combination Starters – NEMA Rated Class 8538 – Fusible Disconnect Switch Type



3-POLE POLYPHASE - 600 VOLTS AC MAXIMUM - 50-60 HERTZ

Devices require 3 thermal units. See catalog 9065CT9701 for selection information. For Class J fuse clip, use Form Y91 (no additional charge).

Fusible Full Voltage Type, with Melting Alloy Overload Relays

Ratings				Fuse Clip Size Amps	NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)†	NEMA Type 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Poly-phase	Coil Voltage *	NEMA Size		Type	Type	Type	With External Reset	Without External Reset
200 (208)	3	208-60	0	30	SBG12V08	SBW12V08	SBW22V08	SBA22V08	SBA12V08
	5		1	30	SCG12V08	SCW12V08	SCW22V08	SCA22V08	SCA12V08
	7½			60	SCG13V08	SCW13V08	SCW23V08	SCA23V08	SCA13V08
	10		2	60	SDG12V08	SDW12V08	SDW22V08	SDA22V08	SDA12V08
	20		3	100	SEG15V08	SEW15V08	SEW25V08	SEA25V08	SEA15V08
	25			200	SEG12V08	SEW12V08		SEA22V08	SEA12V08
	40		4	200	SFG15V08	SFW15V08		SFA25V08	SFA15V08
	75		5	400	SGG15V08	SGW15V08		SGA25V08	SGA15V08
230 (240)	150	240-60 220-50	6	600	SHG13V08	SHW13V08		SHA23V08	SHA13V08
	3		0	30	SBG12V03	SBW12V03	SBW22V03	SBA22V03	SBA12V03
	5		1	30	SCG12V03	SCW12V03	SCW22V03	SCA22V03	SCA12V03
	7½			60	SCG13V03	SCW13V03	SCW23V03	SCA23V03	SCA13V03
	15		2	60	SDG12V03	SDW12V03	SDW22V03	SDA22V03	SDA12V03
	25		3	100	SEG15V03	SEW15V03	SEW25V03	SEA25V03	SEA15V03
	30			200	SEG12V03	SEW12V03		SEA22V03	SEA12V03
	50		4	200	SFG15V03	SFW15V03		SFA25V03	SFA15V03
460 (480)	100	480-60 440-50	5	400	SGG15V03	SGW15V03		SGA25V03	SGA15V03
	200		6	600	SHG13V03	SHW13V03		SHA23V03	SHA13V03
	5		0	30	SBG13V06	SBW13V06	SBW23V06	SBA23V06	SBA13V06
	10		1	30	SCG14V06	SCW14V06	SCW24V06	SCA24V06	SCA14V06
	15			30	SDG16V06	SDW16V06	SDW26V06	SDA26V06	SDA16V06
	25		2	60	SDG14V06	SDW14V06	SDW24V06	SDA24V06	SDA14V06
	50		3	100	SEG13V06	SEW13V06	SEW23V06	SEA23V06	SEA13V06
	100			200	SFG13V06	SFW13V06		SFA23V06	SFA13V06
575 (600)	200	600-60 550-50	5	400	SGG13V06	SGW13V06		SGA23V06	SGA13V06
	400		6	600	SHG12V06	SHW12V06		SHA22V06	SHA12V06
	5		0	30	SBG13V07	SBW13V07	SBW23V07	SBA23V07	SBA13V07
	10		1	30	SCG14V07	SCW14V07	SCW24V07	SCA24V07	SCA14V07
	15			30	SDG16V07	SDW16V07	SDW26V07	SDA26V07	SDA16V07
	25		2	60	SDG14V07	SDW14V07	SDW24V07	SDA24V07	SDA14V07
	50		3	100	SEG13V07	SEW13V07	SEW23V07	SEA23V07	SEA13V07
	100			200	SFG13V07	SFW13V07		SFA23V07	SFA13V07
	200		5	400	SGG13V07	SGW13V07		SGA23V07	SGA13V07
	400		6	600	SHG12V07	SHW12V07		SHA22V07	SHA12V07

★ Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown on Page 4.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to control transformer selection table on Page 35.

Fusible Disconnect Switch Type (Class H Fuse Clips), Single Phase

Motor Voltage	Max. HP	Coil Voltage	NEMA Size	Fuse Clips Size (Amps)	NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA Type 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
					Type	Type	Type	With External Reset	Without External Reset
120	1	120	0	30	SBG12S2V02	SBW12S2V02	SBW22S2V02	SBA22S2V02	SBA12S2V02
	2		1	30	SCG12S2V02	SCW12S2V02	SCW22S2V02	SCA22S2V02	SCA12S2V02
	3		2	60	SDG12S2V02	SDW12S2V02	SDW22S2V02	SDA22S2V02	SDA12S2V02
230	2	230	0	30	SBG12S2V03	SBW12S2V03	SBW22S2V03	SBA22S2V03	SBA12S2V03
	3		1	30	SCG12S2V03	SCW12S2V03	SCW22S2V03	SCA22S2V03	SCA12S2V03
	7½		2	60	SDG12S2V03	SDW12S2V03	SDW22S2V03	SDA22S2V03	SDA12S2V03

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.



File E152395
CCN NKJH7

Explosion proof unit



File E10214
CCN NOTH



File LR584
Class 3211 04

Note that not all units are or explosion proof – consult factory.



Combination Starters – NEMA Rated Non-Fusible Disconnect Switch Type – Class 8538

3-POLE POLYPHASE – 600 VOLTS AC MAXIMUM – 50-60 HZ

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

Non-Fusible Full Voltage Type, Non-Reversing, with Melting Alloy Overload Relays

Ratings				NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)†	NEMA Type 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Poly- phase	Coil Voltage*	NEMA Size	Type	Type	Type	With External Reset	Without External Reset
200 (208)	3	208-60	0	SBG11V08	SBW11V08	SBW21V08	SBA21V08	SBA11V08
	7½		1	SCG11V08	SCW11V08	SCW21V08	SCA21V08	SCA11V08
	10		2	SDG11V08	SDW11V08	SDW21V08	SDA21V08	SDA11V08
	25		3	SEG11V08	SEW11V08	SEW21V08	SEA21V08	SEA11V08
	40		4	SFG11V08	SFW11V08		SFA21V08	SFA11V08
	75		5	SGG11V08	SGW11V08		SGA21V08	SGA11V08
	150		6	SHG11V08	SHW11V08		SHA21V08	SHA11V08
230 (240)	3	240-60 220-50	0	SBG11V03	SBW11V03	SBW21V03	SBA21V03	SBA11V03
	7½		1	SCG11V03	SCW11V03	SCW21V03	SCA21V03	SCA11V03
	15		2	SDG11V03	SDW11V03	SDW21V03	SDA21V03	SDA11V03
	30		3	SEG11V03	SEW11V03	SEW21V03	SEA21V03	SEA11V03
	50		4	SFG11V03	SFW11V03		SFA21V03	SFA11V03
	100		5	SGG11V03	SGW11V03		SGA21V03	SGA11V03
	200		6	SHG11V03	SHW11V03		SHA21V03	SHA11V03
460 (480)	5	480-60 440-50	0	SBG11V06	SBW11V06	SBW21V06	SBA21V06	SBA11V06
	10		1	SCG11V06	SCW11V06	SCW21V06	SCA21V06	SCA11V06
	25		2	SDG11V06	SDW11V06	SDW21V06	SDA21V06	SDA11V06
	50		3	SEG11V06	SEW11V06	SEW21V06	SEA21V06	SEA11V06
	100		4	SFG11V06	SFW11V06		SFA21V06	SFA11V06
	200		5	SGG11V06	SGW11V06		SGA21V06	SGA11V06
	400		6	SHG11V06	SHW11V06		SHA21V06	SHA11V06
575 (600)	5	600-60 550-50	0	SBG11V07	SBW11V07	SBW21V07	SBA21V07	SBA11V07
	10		1	SCG11V07	SCW11V07	SCW21V07	SCA21V07	SCA11V07
	25		2	SDG11V07	SDW11V07	SDW21V07	SDA21V07	SDA11V07
	50		3	SEG11V07	SEW11V07	SEW21V07	SEA21V07	SEA11V07
	100		4	SFG11V07	SFW11V07		SFA21V07	SFA11V07
	200		5	SGG11V07	SGW11V07		SGA21V07	SGA11V07
	400		6	SHG11V07	SHW11V07		SHA21V07	SHA11V07

Non-Fusible Disconnect Switch Type, Single Phase

Motor Voltage	Max. HP	Coil Voltage	NEMA Size	Fuse Clips Size (Amps)	NEMA Type 1 General Purpose Enclosures	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA Type 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure†	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Enclosure	
					Type	Type	Type	With External Reset	Without External Reset
120	1	120	0	N/A	SBG11S2V02	SBW11S2V02	SBW21S2V02	SBA21S2V02	SBA11S2V02
	2		1	N/A	SCG11S2V02	SCW11S2V02	SCW21S2V02	SCA21S2V02	SCA11S2V02
	3		2	N/A	SDG11S2V02	SDW11S2V02	SDW21S2V02	SDA21S2V02	SDA11S2V02
230	2	230	0	N/A	SBG11S2V03	SBW11S2V03	SBW21S2V03	SBA21S2V03	SBA11S2V03
	3		1	N/A	SCG11S2V03	SCW11S2V03	SCW21S2V03	SCA21S2V03	SCA11S2V03
	7½		2	N/A	SDG11S2V03	SDW11S2V03	SDW21S2V03	SDA21S2V03	SDA11S2V03

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown below.

† NEMA Size 6 starters are NEMA Type 4 painted sheet steel enclosure.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to control transformer selection table on Page 35.

Coil Voltage Codes

Voltage	Code
60 Hz	50 Hz
24†▲	...
120†	110
208	...
240	220
480	440
600	550
Specify	Specify
	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.

† These voltage codes must include **Form S** (supplied at No Charge). When specifying **Form S**, please supply motor voltage when ordering.



Combination Starters – NEMA Rated Class 8538 – Fusible Disconnect Switch Type with Class R Fuse Clips

3-POLE POLYPHASE – 600 VOLTS AC MAXIMUM – 50-60 HZ

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

**Fusible (with Class R Fuse Clips) Full Voltage Type, Non-Reversing,
with Melting Alloy Overload Relays — (100,000 AIC Rated)**

RATINGS					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)◆	NEMA Type 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Poly- phase	Coil Voltage *	NEMA Size	Fuse Clip Size Amps	Type	Type	Type	With External Reset	Without External Reset
200 (208)	3	208-60	0	30	SBG32V08	SBW32V08	SBW42V08	SBA42V08	SBA32V08
	5		1	30	SCG32V08	SCW32V08	SCW42V08	SCA42V08	SCA32V08
	7½		1	60	SCG33V08	SCW33V08	SCW43V08	SCA43V08	SCA33V08
	10		2	60	SDG32V08	SDW32V08	SDW42V08	SDA42V08	SDA32V08
	20		3	100	SEG35V08	SEW35V08	SEW45V08	SEA45V08	SEA35V08
	25		3	200	SEG32V08	SEW32V08		SEA42V08	SEA32V08
	40		4	200	SFG35V08	SFW35V08		SFA45V08	SFA35V08
	75		5	400	SGG35V08	SGW35V08		SGA45V08	SGA35V08
	150		6	600	SHG33V08	SHW33V08		SHA43V08	SHA33V08
230 (240)	3	240-60 220-50	0	30	SBG32V03	SBW32V03	SBW42V03	SBA42V03	SBA32V03
	5		1	30	SCG32V03	SCW32V03	SCW42V03	SCA42V03	SCA32V03
	7½		1	60	SCG33V03	SCW33V03	SCW43V03	SCA43V03	SCA33V03
	15		2	60	SDG32V03	SDW32V03	SDW42V03	SDA42V03	SDA32V03
	25		3	100	SEG35V03	SEW35V03	SEW45V03	SEA45V03	SEA35V03
	30		3	200	SEG32V03	SEW32V03		SEA42V03	SEA32V03
	50		4	200	SFG35V03	SFW35V03		SFA45V03	SFA35V03
	100		5	400	SGG35V03	SGW35V03		SGA45V03	SGA35V03
	200		6	600	SHG33V03	SHW33V03		SHA43V03	SHA33V03
460 (480)	5	480-60 440-50	0	30	SBG33V06	SBW33V06	SBW43V06	SBA43V06	SBA33V06
	10		1	30	SCG34V06	SCW34V06	SCW44V06	SCA44V06	SCA34V06
	15		2	30	SDG36V06	SDW36V06	SDW46V06	SDA46V06	SDA36V06
	25		2	60	SDG34V06	SDW34V06	SDW44V06	SDA44V06	SDA34V06
	50		3	100	SEG33V06	SEW33V06	SEW43V06	SEA43V06	SEA33V06
	100		4	200	SFG33V06	SFW33V06		SFA43V06	SFA33V06
	200		5	400	SGG33V06	SGW33V06		SGA43V06	SGA33V06
	400		6	600	SHG32V06	SHW32V06		SHA42V06	SHA32V06
	575 (600)		5	600-60 550-50	0	30	SBG33V07	SBW33V07	SBW43V07
10		1	30		SCG34V07	SCW34V07	SCW44V07	SCA44V07	SCA34V07
15		2	30		SDG36V07	SDW36V07	SDW46V07	SDA46V07	SDA36V07
25		2	60		SDG34V07	SDW34V07	SDW44V07	SDA44V07	SDA34V07
50		3	100		SEG33V07	SEW33V07	SEW43V07	SEA43V07	SEA33V07
100		4	200		SFG33V07	SFW33V07		SFA43V07	SFA33V07
200		5	400		SGG33V07	SGW33V07		SGA43V07	SGA33V07
400		6	600		SHG32V07	SHW32V07		SHA42V07	SHA32V07

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown below.

♦ NEMA Size 6 starters are NEMA Type 4 painted sheet steel enclosures.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to the control transformer selection table on Page 35.

Coil Voltage Codes

Voltage	Code
60 Hz	50 Hz
24†▲	...
120†	110
208	...
240	220
480	440
600	550
Specify	Specify
	V01
	V02
	V08
	V03
	V06
	V07
	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.

† These voltage codes must include **Form S** (supplied at No Charge). When specifying **Form S**, please supply motor voltage when ordering.



Combination Starters — NEMA Rated Disconnect Switch Type in Oversized Enclosure, NEMA Size 0–2★ – Class 8538

3-POLE POLYPHASE – 600 VOLTS AC MAXIMUM – 50-60 HZ

Full Voltage Type With Melting Alloy Overload Relays

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

Class 8538 Non-Fusible Disconnect Switch Type

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Polyphase	Coil Voltage *	NEMA Size	Fuse Clip Size Amps	Type	Type	With External Reset	Without External Reset
200 (208)	3 7½ 10	208-60	0 1 2	N/A N/A N/A	SBG11S8V08 SCG11S8V08 SDG11S8V08	SBW11S8V08 SCW11S8V08 SDW11S8V08	SBA21S8V08 SCA21S8V08 SDA21S8V08	SBA11S8V08 SCA11S8V08 SDA11S8V08
230 (240)	3 7½ 15	240-60 220-50	0 1 2	N/A N/A N/A	SBG11S8V03 SCG11S8V03 SDG11S8V03	SBW11S8V03 SCW11S8V03 SDW11S8V03	SBA21S8V03 SCA21S8V03 SDA21S8V03	SBA11S8V03 SCA11S8V03 SDA11S8V03
460 (480)	5 10 25	480-60 440-50	0 1 2	N/A N/A N/A	SBG11S8V06 SCG11S8V06 SDG11S8V06	SBW11S8V06 SCW11S8V06 SDW11S8V06	SBA21S8V06 SCA21S8V06 SDA21S8V06	SBA11S8V06 SCA11S8V06 SDA11S8V06
575 (600)	5 10 25	600-60 550-50	0 1 2	N/A N/A N/A	SBG11S8V07 SCG11S8V07 SDG11S8V07	SBW11S8V07 SCW11S8V07 SDW11S8V07	SBA21S8V07 SCA21S8V07 SDA21S8V07	SBA11S8V07 SCA11S8V07 SDA11S8V07

Class 8538 Fusible Disconnect Switch Type

200 (208)	3 5 7½ 10	208-60	0 1 1 2	30 30 60 60	SBG12S8V08 SCG12S8V08 SCG13S8V08 SDG12S8V08	SBW12S8V08 SCW12S8V08 SCW13S8V08 SDW12S8V08	SBA22S8V08 SCA22S8V08 SCA23S8V08 SDA22S8V08	SBA12S8V08 SCA12S8V08 SCA13S8V08 SDA12S8V08
230 (240)	3 5 7½ 15	240-60 220-50	0 1 1 2	30 30 60 60	SBG12S8V03 SCG12S8V03 SCG13S8V03 SDG12S8V03	SBW12S8V03 SCW12S8V03 SCW13S8V03 SDW12S8V03	SBA22S8V03 SCA22S8V03 SCA23S8V03 SDA22S8V03	SBA12S8V03 SCA12S8V03 SCA13S8V03 SDA12S8V03
460 (480)	5 10 15 25	480-60 440-50	0 1 2 2	30 30 60 60	SBG13S8V06 SCG14S8V06 SDG16S8V06 SDG14S8V06	SBW13S8V06 SCW14S8V06 SDW16S8V06 SDW14S8V06	SBA23S8V06 SCA24S8V06 SDA26S8V06 SDA24S8V06	SBA13S8V06 SCA14S8V06 SDA16S8V06 SDA14S8V06
575 (600)	5 10 15 25	600-60 550-50	0 1 2 2	30 30 60 60	SBG13S8V07 SCG14S8V07 SDG16S8V07 SDG14S8V07	SBW13S8V07 SCW14S8V07 SDW16S8V07 SDW14S8V07	SBA23S8V07 SCA24S8V07 SDA26S8V07 SDA24S8V07	SBA13S8V07 SCA14S8V07 SDA16S8V07 SDA14S8V07

Class 8538 Fusible Disconnect Switch Type with Class R Fuse Clips

200 (208)	3 5 7½ 10	208-60	0 1 1 2	30 30 60 60	SBG32S8V08 SCG32S8V08 SCG33S8V08 SDG32S8V08	SBW32S8V08 SCW32S8V08 SCW33S8V08 SDW32S8V08	SBA42S8V08 SCA42S8V08 SCA43S8V08 SDA42S8V08	SBA32S8V08 SCA32S8V08 SCA33S8V08 SDA32S8V08
230 (240)	3 5 7½ 15	240-60 220-50	0 1 1 2	30 30 60 60	SBG32S8V03 SCG32S8V03 SCG33S8V03 SDG32S8V03	SBW32S8V03 SCW32S8V03 SCW33S8V03 SDW32S8V03	SBA42S8V03 SCA42S8V03 SCA43S8V03 SDA42S8V03	SBA32S8V03 SCA32S8V03 SCA33S8V03 SDA32S8V03
460 (480)	5 10 15 25	480-60 440-50	0 1 2 2	30 30 60 60	SBG33S8V06 SCG34S8V06 SDG36S8V06 SDG34S8V06	SBW33S8V06 SCW34S8V06 SDW36S8V06 SDW34S8V06	SBA43S8V06 SCA44S8V06 SDA46S8V06 SDA44S8V06	SBA33S8V06 SCA34S8V06 SDA36S8V06 SDA34S8V06
575 (600)	5 10 15 25	600-60 550-50	0 1 2 2	30 30 60 60	SBG33S8V07 SCG34S8V07 SDG36S8V07 SDG34S8V07	SBW33S8V07 SCW34S8V07 SDW36S8V07 SDW34S8V07	SBA43S8V07 SCA44S8V07 SDA46S8V07 SDA44S8V07	SBA33S8V07 SCA34S8V07 SDA36S8V07 SDA34S8V07

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

★ For NEMA Size 3-5 starters in oversized NEMA Type 1, 4 or 12 enclosures, price and order standard starter with **Form G28**.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown below.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to the control transformer selection table on Page 35.

Class 8538 Fusible Disconnect Switch Type for Horizontal Mounting

Ratings					NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Polyphase	Coil Voltage*	NEMA Size	Fuse Clip Size Amps	With External Reset Type	Without External Reset Type
200 (208)	2 7½	208-60	1	30 60	SCA22S1V08 SCA23S1V08	SCA12S1V08 SCA13S1V08
230 (240)	2 7½	240-60 220-50	1	30 60	SCA22S1V03 SCA23S1V03	SCA12S1V03 SCA13S1V03
460 (480)	10	480-60 440-50	1	30	SCA24S1V06	SCA14S1V06
575 (600)	10	600-60 550-50	1	30	SCA24S1V07	SCA14S1V07

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table or additional standard voltage codes shown on Page 31.

Coil Voltage Codes

Voltage	Code
60 Hz	
24†▲	V01
120†	V02
208	V08
240	V03
480	V06
600	V07
Specify	V99
50 Hz	
110	V01
220	V03
440	V06
550	V07
Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.

† These voltage codes must include **Form S** (supplied at No Charge). When specifying **Form S**, supply motor voltage when ordering.



Combination Starters – NEMA Rated Class 8539 – MAG-GARD® in Oversized Enclosure, NEMA Size 0–2★

3-POLE POLYPHASE – 600 VOLTS AC MAXIMUM – 50-60 HZ

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

Full Voltage Type, Non-Reversing with Melting Alloy Overload Relays

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA Type 12/3RA Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage Starter Voltage)	HP Range Polyphase	Coil Voltage *	NEMA Size	Circuit Breaker (See Page 5-14 for Breaker Adjustment Range)	Type	Type	With External Reset	Without External Reset
200 (208)	1/4-1/3 1/2-1 1 1/2-3	208-60	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41S8V08 SBG42S8V08 SBG43S8V08	SBW41S8V08 SBW42S8V08 SBW43S8V08	SBA51S8V08 SBA52S8V08 SBA53S8V08	SBA41S8V08 SBA42S8V08 SBA43S8V08
	1/4-1/3 1/2-1 1 1/2-3 5 7 1/2		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04 GJL36050-M05	SCG41S8V08 SCG42S8V08 SCG43S8V08 SCG44S8V08 SCG45S8V08	SCW41S8V08 SCW42S8V08 SCW43S8V08 SCW44S8V08 SCW45S8V08	SCA51S8V08 SCA52S8V08 SCA53S8V08 SCA54S8V08 SCA55S8V08	SCA41S8V08 SCA42S8V08 SCA43S8V08 SCA44S8V08 SCA45S8V08
	1 1/2-3 5 7 1/2-10		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41S8V08 SDG42S8V08 SDG43S8V08	SDW41S8V08 SDW42S8V08 SDW43S8V08	SDA51S8V08 SDA52S8V08 SDA53S8V08	SDA41S8V08 SDA42S8V08 SDA43S8V08
	1/4-1/3 1/2-1 1 1/2-3		0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41S8V03 SBG42S8V03 SBG43S8V03	SBW41S8V03 SBW42S8V03 SBW43S8V03	SBA51S8V03 SBA52S8V03 SBA53S8V03	SBA41S8V03 SBA42S8V03 SBA43S8V03
	1/4-1/3 1/2-1 1 1/2-3 5-7 1/2		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04	SCG41S8V03 SCG42S8V03 SCG43S8V03 SCG44S8V03	SCW41S8V03 SCW42S8V03 SCW43S8V03 SCW44S8V03	SCA51S8V03 SCA52S8V03 SCA53S8V03 SCA54S8V03	SCA41S8V03 SCA42S8V03 SCA43S8V03 SCA44S8V03
	1 1/2-3 5-7 1/2 10 15		2	GJL36015-M03 GJL36030-M04 GJL36050-M05 FAL36100-18M	SDG41S8V03 SDG42S8V03 SDG43S8V03 SDG44S8V03	SDW41S8V03 SDW42S8V03 SDW43S8V03 SDW44S8V03	SDA51S8V03 SDA52S8V03 SDA53S8V03 SDA54S8V03	SDA41S8V03 SDA42S8V03 SDA43S8V03 SDA44S8V03
	1/4-1 1 1/2-3 5		0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41S8V06 SBG42S8V06 SBG43S8V06	SBW41S8V06 SBW42S8V06 SBW43S8V06	SBA51S8V06 SBA52S8V06 SBA53S8V06	SBA41S8V06 SBA42S8V06 SBA43S8V06
	1/4-1 1 1/2-3 5-7 1/2 10		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04	SCG41S8V06 SCG42S8V06 SCG43S8V06 SCG44S8V06	SCW41S8V06 SCW42S8V06 SCW43S8V06 SCW44S8V06	SCA51S8V06 SCA52S8V06 SCA53S8V06 SCA54S8V06	SCA41S8V06 SCA42S8V06 SCA43S8V06 SCA44S8V06
	5-7 1/2 10-15 20-25		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41S8V06 SDG42S8V06 SDG43S8V06	SDW41S8V06 SDW42S8V06 SDW43S8V06	SDA51S8V06 SDA52S8V06 SDA53S8V06	SDA41S8V06 SDA42S8V06 SDA43S8V06
	1/4-1 1 1/2-3 5		0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41S8V07 SBG42S8V07 SBG43S8V07	SBW41S8V07 SBW42S8V07 SBW43S8V07	SBA51S8V07 SBA52S8V07 SBA53S8V07	SBA41S8V07 SBA42S8V07 SBA43S8V07
	1/4-1 1 1/2-3 5-10		1	GJL36003-M01 GJL36007-M02 GJL36015-M03	SCG41S8V07 SCG42S8V07 SCG43S8V07	SCW41S8V07 SCW42S8V07 SCW43S8V07	SCA51S8V07 SCA52S8V07 SCA53S8V07	SCA41S8V07 SCA42S8V07 SCA43S8V07
	5-10 15-20 25		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41S8V07 SDG42S8V07 SDG43S8V07	SDW41S8V07 SDW42S8V07 SDW43S8V07	SDA51S8V07 SDA52S8V07 SDA53S8V07	SDA41S8V07 SDA42S8V07 SDA43S8V07

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.
★ For NEMA Size 3-5 starters in oversized NEMA Type 1, 4 or 12 enclosures, price and order standard starter with **Form G28**.
* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown below.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to control transformer selection table on Page 35.

Form Y534 may be used to substitute an FAL circuit breaker for a GJL circuit breaker (no additional charge).

Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24†▲	...	V01
120†	110	V02
208	...	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.
† These voltage codes must include **Form S** (supplied at No Charge). When specifying **Form S**, please supply motor voltage when ordering.

Dimensions Page 17
Factory Modifications (Forms) Page 30
Type S Accessories (Class 9999) Catalog 9999CT9701



Combination Starters – NEMA Rated MAG-GARD® Circuit Breaker – Class 8539

3-POLE POLYPHASE – 600 VOLTS AC MAXIMUM – 50-60 HZ

Devices require 3 thermal units (Sizes 00-6). See Catalog 9065CT9701 for selection information.

Full Voltage Type, Non-Reversing, with Melting Alloy Overload Relay

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)♦	NEMA Type 4X Watertight and Corrosion Resistant Polyester Enclosure	NEMA Types 7 & 9★ For Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G (Cast Aluminum)		NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	HP Range Poly-phase	Coil Voltage *	NEMA Size	Circuit Breaker (See Page 5-14 for Breaker Adjustment Range)	Type	Type	Type	SPIN TOP® Type	Bolted Type	With External Reset Type	Without External Reset Type
200 (208)	1/4-1/2 1/2-1 1 1/2-3	208-60	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41V08 SBG42V08 SBG43V08	SBW41V08 SBW42V08 SBW43V08	SBW51V08 SBW52V08 SBW53V08	SBR41V08 SBR42V08 SBR43V08	SBT41V08 SBT42V08 SBT43V08	SBA51V08 SBA52V08 SBA53V08	SBA41V08 SBA42V08 SBA43V08
	3/4-1 1/2 1 1/2-3 5 7 1/2		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04 GJL36050-M05	SCG41V08 SCG42V08 SCG43V08 SCG44V08 SCG45V08	SCW41V08 SCW42V08 SCW43V08 SCW44V08 SCW45V08	SCW51V08 SCW52V08 SCW53V08 SCW54V08 SCW55V08	SCR41V08 SCR42V08 SCR43V08 SCR44V08 SCR45V08	SCT41V08 SCT42V08 SCT43V08 SCT44V08 SCT45V08	SCA51V08 SCA52V08 SCA53V08 SCA54V08 SCA55V08	SCA41V08 SCA42V08 SCA43V08 SCA44V08 SCA45V08
	1 1/2-3 5 7 1/2-10		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41V08 SDG42V08 SDG43V08	SDW41V08 SDW42V08 SDW43V08	SDW51V08 SDW52V08 SDW53V08	SDR41V08 SDR42V08 SDR43V08	SDT41V08 SDT42V08 SDT43V08	SDA51V08 SDA52V08 SDA53V08	SDA41V08 SDA42V08 SDA43V08
	15-25		3	FAL36100-18M	SEG42V08	SEW42V08	SEW52V08	SER42V08	SET42V08	SEA52V08	SEA42V08
	30 40		4	KAL36250-25M KAL36250-26M	SFG42V08 SFG43V08	SFW42V08 SFW43V08	SFW52V08 SFW53V08	SFR42V08 SFR43V08	SFT42V08 SFT43V08	SFA52V08 SFA53V08	SFA42V08 SFA43V08
	50 60 75		5	KAL36250-30M LAL36400-32M LAL36400-33M	SGG42V08 SGG44V08 SGG45V08	SGW42V08 SGW44V08 SGW45V08		SGR42V08 SGR44V08 SGR45V08	SGT42V08 SGT44V08 SGT45V08	SGA52V08 SGA54V08 SGA55V08	SGA42V08 SGA44V08 SGA45V08
	100 125 150		6	LAL36400-36M MAL36600-40M MAL36600-42M	SHG43V08 SHG44V08 SHG45V08	SHW43V08 SHW44V08 SHW45V08				SHA53V08 SHA54V08 SHA55V08	SHA43V08 SHA44V08 SHA45V08
	1/4-1/2 1/2-1 1 1/2-3	240-60 220-50	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41V03 SBG42V03 SBG43V03	SBW41V03 SBW42V03 SBW43V03	SBW51V03 SBW52V03 SBW53V03	SBR41V03 SBR42V03 SBR43V03	SBT41V03 SBT42V03 SBT43V03	SBA51V03 SBA52V03 SBA53V03	SBA41V03 SBA42V03 SBA43V03
	3/4-1 1/2 1 1/2-3 5-7 1/2		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04	SCG41V03 SCG42V03 SCG43V03 SCG44V03	SCW41V03 SCW42V03 SCW43V03 SCW44V03	SCW51V03 SCW52V03 SCW53V03 SCW54V03	SCR41V03 SCR42V03 SCR43V03 SCR44V03	SCT41V03 SCT42V03 SCT43V03 SCT44V03	SCA51V03 SCA52V03 SCA53V03 SCA54V03	SCA41V03 SCA42V03 SCA43V03 SCA44V03
	1 1/2-3 5-7 1/2 10 15		2	GJL36015-M03 GJL36030-M04 GJL36050-M05 FAL36100-18M	SDG41V03 SDG42V03 SDG43V03 SDG44V03	SDW41V03 SDW42V03 SDW43V03 SDW44V03	SDW51V03 SDW52V03 SDW53V03 SDW54V03	SDR41V03 SDR42V03 SDR43V03 SDR44V03	SDT41V03 SDT42V03 SDT43V03 SDT44V03	SDA51V03 SDA52V03 SDA53V03 SDA54V03	SDA41V03 SDA42V03 SDA43V03 SDA44V03
	15-30		3	FAL36100-18M	SEG42V03	SEW42V03	SEW52V03	SER42V03	SET42V03	SEA52V03	SEA42V03
	40 50		4	KAL36250-26M KAL36250-29M	SFG43V03 SFG44V03	SFW43V03 SFW44V03	SFW53V03 SFW54V03	SFR43V03 SFR44V03	SFT43V03 SFT44V03	SFA53V03 SFA54V03	SFA43V03 SFA44V03
	60 75 100		5	KAL36250-31M LAL36400-32M LAL36400-35M	SGG43V03 SGG44V03 SGG46V03	SGW43V03 SGW44V03 SGW46V03		SGR43V03 SGR44V03 SGR46V03	SGT43V03 SGT44V03 SGT46V03	SGA53V03 SGA54V03 SGA56V03	SGA43V03 SGA44V03 SGA46V03
	125-150 200		6	MAL36600-40M MAL36600-44M	SHG44V03 SHG46V03	SHW44V03 SHW46V03				SHA54V03 SHA56V03	SHA44V03 SHA46V03
	250 300		7	MAL36800-45M MAL361000-47M	SJG42V03 SJG43V03	SJW42V03 SJW43V03				SJA52V03 SJA53V03	

♦ NEMA Size 6 & 7 starters are NEMA Type 4 painted sheet steel enclosures.

★ NEMA Types 7 and 9 Bolted are not UL Listed.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown below.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to control transformer selection table on Page 35.

Form Y534 may be used to substitute an FAL circuit breaker for a GJL circuit breaker (no additional charge).

Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24†▲	...	V01
120†	110	V02
208	...	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, Form S (separate control) must be specified.

† These voltage codes must include Form S (supplied at No Charge). When specifying Form S, please supply motor voltage when ordering.

DimensionsPage 17
Factory Modifications (Forms)Page 30
Type S Accessories (Class 9999)Catalog 9999CT9701



Combination Starters – NEMA Rated Class 8539 – MAG-GARD® Circuit Breaker

3-POLE POLYPHASE – 600 VOLTS AC MAXIMUM – 50-60 HZ

Devices require 3 thermal units (sizes 00-6). See Catalog 9065CT9701 for selection information.

Full Voltage Type, Non-Reversing, with Melting Alloy Overload Relays

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)†	NEMA Type 4X Watertight Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Types 7 & 9★ For Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G (Cast Aluminum)		NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure		
Motor Voltage (Starter Voltage)	HP Range Poly-phase	Coil Voltage *	NEMA Size	Circuit Breaker (See Page 5-14 for Breaker Adjustment Range)	Type	Type	Type	SPIN TOP®Type	Bolted Type	With External Reset Type	Without External Reset Type	
460 (480)	1/4-1 1-1/2-3 5	480-60 440-50	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41V06 SBG42V06 SBG43V06	SBW41V06 SBW42V06 SBW43V06	SBW51V06 SBW52V06 SBW53V06	SBR41V06 SBR42V06 SBR43V06	SBT41V06 SBT42V06 SBT43V06	SBA51V06 SBA52V06 SBA53V06	SBA41V06 SBA42V06 SBA43V06	
	1/4-1 1-1/2-3 5-7-1/2 10		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04	SCG41V06 SCG42V06 SCG43V06 SCG44V06	SCW41V06 SCW42V06 SCW43V06 SCW44V06	SCW51V06 SCW52V06 SCW53V06 SCW54V06	SCR41V06 SCR42V06 SCR43V06 SCR44V06	SCT41V06 SCT42V06 SCT43V06 SCT44V06	SCA51V06 SCA52V06 SCA53V06 SCA54V06	SCA41V06 SCA42V06 SCA43V06 SCA44V06	
	5-7-1/2 10-15 20-25		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41V06 SDG42V06 SDG43V06	SDW41V06 SDW42V06 SDW43V06	SDW51V06 SDW52V06 SDW53V06	SDR41V06 SDR42V06 SDR43V06	SDT41V06 SDT42V06 SDT43V06	SDA51V06 SDA52V06 SDA53V06	SDA41V06 SDA42V06 SDA43V06	
	20-25 30-50		3	GJL36050-M05 FAL36100-18M	SEG41V06 SEG42V06	SEW41V06 SEW42V06	SEW51V06 SEW52V06	SER41V06 SER42V06	SET41V06 SET42V06	SEA51V06 SEA52V06	SEA41V06 SEA42V06	
	60-75 100		4	KAL36250-25M KAL36250-29M	SFG42V06 SFG44V06	SFW42V06 SFW44V06	SFW52V06 SFW54V06	SFR42V06 SFR44V06	SFT42V06 SFT44V06	SFA52V06 SFA54V06	SFA42V06 SFA44V06	
	125 150 200		5	KAL36250-31M LAL36400-32M LAL36400-33M	SGG43V06 SGG44V06 SGG46V06	SGW43V06 SGW44V06 SGW46V06		SGR43V06 SGR44V06 SGR46V06	SGT43V06 SGT44V06 SGT46V06	SGA53V06 SGA54V06 SGA56V06	SGA43V06 SGA44V06 SGA46V06	
	250 300 350 400		6	LAL36400-36M MAL36600-40M MAL36600-42M MAL36600-44M	SHG43V06 SHG44V06 SHG45V06 SHG46V06	SHW43V06 SHW44V06 SHW45V06 SHW46V06				SHA53V06 SHA54V06 SHA55V06 SHA56V06	SHA43V06 SHA44V06 SHA45V06 SHA46V06	
	500 600		7	MAL36900-45M MAL361000-47M	SJG42V06 SJG43V06	SJW42V06 SJW43V06				SJA52V06 SJA53V06		
	575 (600)	1/4-1 1-1/2-3 5	600-60 550-50	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41V07 SBG42V07 SBG43V07	SBW41V07 SBW42V07 SBW43V07	SBW51V07 SBW52V07 SBW53V07	SBR41V07 SBR42V07 SBR43V07	SBT41V07 SBT42V07 SBT43V07	SBA51V07 SBA52V07 SBA53V07	SBA41V07 SBA42V07 SBA43V07
		1/4-1 1-1/2-3 5-10		1	GJL36003-M01 GJL36007-M02 GJL36015-M03	SCG41V07 SCG42V07 SCG43V07	SCW41V07 SCW42V07 SCW43V07	SCW51V07 SCW52V07 SCW53V07	SCR41V07 SCR42V07 SCR43V07	SCT41V07 SCT42V07 SCT43V07	SCA51V07 SCA52V07 SCA53V07	SCA41V07 SCA42V07 SCA43V07
		5-10 15-20 25		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41V07 SDG42V07 SDG43V07	SDW41V07 SDW42V07 SDW43V07	SDW51V07 SDW52V07 SDW53V07	SDR41V07 SDR42V07 SDR43V07	SDT41V07 SDT42V07 SDT43V07	SDA51V07 SDA52V07 SDA53V07	SDA41V07 SDA42V07 SDA43V07
		25-30 40-50		3	GJL36050-M05 FAL36100-18M	SEG41V07 SEG42V07	SEW41V07 SEW42V07	SEW51V07 SEW52V07	SER41V07 SER42V07	SET41V07 SET42V07	SEA51V07 SEA52V07	SEA41V07 SEA42V07
		60-100		4	KAL36250-25M	SFG42V07	SFW42V07	SFW52V07	SFR42V07	SFT42V07	SFA52V07	SFA42V07
		125 150 200		5	KAL36250-29M KAL36250-30M LAL36400-32M	SGG41V07 SGG42V07 SGG44V07	SGW41V07 SGW42V07 SGW44V07		SGR41V07 SGR42V07 SGR44V07	SGT41V07 SGT42V07 SGT44V07	SGA51V07 SGA52V07 SGA54V07	SGA41V07 SGA42V07 SGA44V07
		250 300 350-400		6	LAL36400-35M LAL36400-36M MAL36600-40M	SHG42V07 SHG43V07 SHG44V07	SHW42V07 SHW43V07 SHW44V07				SHA52V07 SHA53V07 SHA54V07	SHA42V07 SHA43V07 SHA44V07
		500 600		7	MAL36800-44M MAL36800-45M	SJG41V07 SJG42V07	SJW41V07 SJW42V07				SJA51V07 SJA52V07	

† NEMA Size 6 & 7 starters are NEMA Type 4 painted sheet steel enclosures.

★ NEMA Type 7 & 9 Bolted are not UL Listed.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes below.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to control transformer selection table on Page 35.

Form Y534 may be used to substitute an FAL circuit breaker for a GJL circuit breaker (no additional charge).

Coil Voltage Codes

Voltage	Code
60 Hz	
24†▲	V01
120†	V02
208	V08
240	V03
480	V06
600	V07
Specify	V99
50 Hz	
...	V01
110	V02
...	V08
220	V03
440	V06
550	V07
Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, Form S (separate control) must be specified.

† These voltage codes must include Form S (supplied at No Charge). When specifying Form S, please supply motor voltage when ordering.

Dimensions Page 17
Factory Modifications (Forms) Page 30
Type S Accessories (Class 9999) Catalog 9999CT9701



Combination Starters – NEMA Rated Thermal Magnetic Circuit Breaker – Class 8539

3-POLE POLYPHASE – 600 VOLTS AC MAXIMUM – 50-60 HZ

Devices require 3 thermal units (sizes 0-6). See Catalog 9065CT9701 for selection information.

Full Voltage Type, Non-Reversing, with Melting Alloy Overload Relays

Ratings						NEMA Type 1 General Purpose	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)†	NEMA Type 4X Watertight Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Types 7 & 9* For Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G (Cast Aluminum)	NEMA Type 12/3RA Dusttight and Driptight Industrial Use Enclosure				
Motor Voltage (Starter Voltage)	Max. HP Poly-phase	Coil Voltage *	NEMA Size	Circuit Breaker		Type	Type	Type	SPIN TOP® Type	Bolted Type	With External Reset	Without External Reset		
				Type	Ampere Rating						Type	Type		
200 (208)	2	208-60	0	FAL●	15 20	SBG1V08 SBG3V08	SBW1V08 SBW3V08	SBW11V08 SBW13V08	SBR1V08 SBR3V08	SBT1V08 SBT3V08	SBA11V08 SBA13V08	SBA1V08 SBA3V08		
	5 7½			1	FAL●	35 50	SCG5V08 SCG2V08	SCW5V08 SCW2V08	SCW15V08 SCW12V08	SCR5V08 SCR2V08	SCT5V08 SCT2V08	SCA15V08 SCA12V08	SCA5V08 SCA2V08	
	10				2	FAL●	60	SDG1V08	SDW1V08	SDW11V08	SDR1V08	SDT1V08	SDA11V08	SDA1V08
	15 20 25		3	FAL	90 100 110	SEG3V08 SEG1V08 SEG5V08	SEW3V08 SEW1V08 SEW5V08	SEW13V08 SEW11V08 SEW15V08	SER3V08 SER1V08 SER5V08	SET3V08 SET1V08 SET5V08	SEA13V08 SEA11V08 SEA15V08	SEA3V08 SEA1V08 SEA5V08		
	30 40			4	KAL	125 200	SFG3V08 SFG4V08	SFW3V08 SFW4V08	SFW13V08 SFW14V08	SFR3V08 SFR4V08	SFT3V08 SFT4V08	SFA13V08 SFA14V08	SFA3V08 SFA4V08	
	50 60 75				5	LAL	200 250 300	SGG6V08 SGG1V08 SGG4V08	SGW6V08 SGW1V08 SGW4V08		SGR6V08 SGR1V08 SGR4V08	SGT6V08 SGT1V08 SGT4V08	SGA16V08 SGA11V08 SGA14V08	SGA6V08 SGA1V08 SGA4V08
	100 125 150		6	MAL	450 600 600	SHG4V08 SHG3V08 SHG5V08	SHW4V08 SHW3V08 SHW5V08				SHA14V08 SHA13V08 SHA15V08	SHA4V08 SHA3V08 SHA5V08		
	230 (240)			2 3	0	FAL●	15 20	SBG1V03 SBG3V03	SBW1V03 SBW3V03	SBW11V03 SBW13V03	SBR1V03 SBR3V03	SBT1V03 SBT3V03	SBA11V03 SBA13V03	SBA1V03 SBA3V03
				5 7½		1	FAL●	30 45	SCG1V03 SCG6V03	SCW1V03 SCW6V03	SCW11V03 SCW16V03	SCR1V03 SCR6V03	SCT1V03 SCT6V03	SCA11V03 SCA16V03
			10 15	2			FAL●	60 80	SDG1V03 SDG7V03	SDW1V03 SDW7V03	SDW11V03 SDW17V03	SDR1V03 SDR7V03	SDT1V03 SDT7V03	SDA11V03 SDA17V03
			20 25 30	3	FAL FAL KAL	90 100 110	SEG3V03 SEG1V03 SEG5V03	SEW3V03 SEW1V03 SEW5V03	SEW13V03 SEW11V03 SEW15V03	SER3V03 SER1V03 SER5V03	SET3V03 SET1V03 SET5V03	SEA13V03 SEA11V03 SEA15V03	SEA3V03 SEA1V03 SEA5V03	
			40 50		4	KAL	150 200	SFG1V03 SFG4V03	SFW1V03 SFW4V03	SFW11V03 SFW14V03	SFR1V03 SFR4V03	SFT1V03 SFT4V03	SFA11V03 SFA14V03	SFA1V03 SFA4V03
			60 75 100			5	LAL	225 250 350	SGG3V03 SGG1V03 SGG2V03	SGW3V03 SGW1V03 SGW2V03		SGR3V03 SGR1V03 SGR2V03	SGT3V03 SGT1V03 SGT2V03	SGA13V03 SGA11V03 SGA12V03
			125 150 200	6	MAL	450 600 800	SHG4V03 SHG3V03 SHG7V03	SHW4V03 SHW3V03 SHW7V03				SHA14V03 SHA13V03 SHA17V03	SHA4V03 SHA3V03 SHA7V03	
			250 300		7	MAL	900 1000	SJG2V03 SJG3V03	SJW2V03 SJW3V03				SJA12V03 SJA13V03	

† NEMA Size 6 & 7 starters are NEMA Type 4 painted sheet steel enclosures.

★ NEMA Type 7 & 9 bolted are not UL Listed.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes below.

● Rated 250 Volts Max.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to control transformer selection table on Page 35.

Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24†▲	...	V01
120†	110	V02
208	...	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.

† These voltage codes must include **Form S** (supplied at No Charge). When specifying **Form S**, please supply motor voltage when ordering.

Dimensions Page 17
Factory Modifications (Forms) Page 30
Type S Accessories (Class 9999) Catalog 9999CT9701



Combination Starters – NEMA Rated Class 8539 – Thermal Magnetic Circuit Breaker

3-POLE POLYPHASE – 600 VOLTS AC MAXIMUM – 50-60 HZ

Devices require 3 thermal units (sizes 00-6). See Catalog 9065CT9701 for selection information.

Line Voltage Type, Non-Reversing, with Melting Alloy Overload Relays

Ratings						NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)†	NEMA Type 4X Watertight Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Types 7 & 9★ For Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G (Cast Aluminum)	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure				
Motor Voltage (Starter Voltage)	Max. HP Poly- phase	Coil Voltage *	NEMA Size	Circuit Breaker		Type	Type	Type	SPIN TOP® Type	Bolted Type	With External Reset	Without External Reset		
				Type	Ampere Rating						Type	Type		
460 (480)	5	480-60 440-50	0	FAL	15	SBG2V06	SBW2V06	SBW12V06	SBR2V06	SBT2V06	SBA12V06	SBA2V06		
	7½ 10		1	FAL	20 25	SCG3V06 SCG7V06	SCW3V06 SCW7V06	SCW13V06 SCW17V06	SCR3V06 SCR7V06	SCT3V06 SCT7V06	SCA13V06 SCA17V06	SCA3V06 SCA7V06		
	15 20 25		2	FAL	40 60 70	SDG3V06 SDG4V06 SDG5V06	SDW3V06 SDW4V06 SDW5V06	SDW13V06 SDW14V06 SDW15V06	SDR3V06 SDR4V06 SDR5V06	SDT3V06 SDT4V06 SDT5V06	SDA13V06 SDA14V06 SDA15V06	SDA3V06 SDA4V06 SDA5V06		
	30 40 50		3	FAL	80 90 100	SEG6V06 SEG3V06 SEG1V06	SEW6V06 SEW3V06 SEW1V06	SEW16V06 SEW13V06 SEW11V06	SER6V06 SER3V06 SER1V06	SET6V06 SET3V06 SET1V06	SEA16V06 SEA13V06 SEA11V06	SEA6V06 SEA3V06 SEA1V06		
	60 75 100		4	KAL	110 125 200	SFG5V06 SFG3V06 SFG4V06	SFW5V06 SFW3V06 SFW4V06	SFW15V06 SFW13V06 SFW14V06	SFR5V06 SFR3V06 SFR4V06	SFT5V06 SFT3V06 SFT4V06	SFA15V06 SFA13V06 SFA14V06	SFA5V06 SFA3V06 SFA4V06		
	125 150 200		5	LAL	225 250 350	SGG3V06 SGG1V06 SGG2V06	SGW3V06 SGW1V06 SGW2V06		SGR3V06 SGR1V06 SGR2V06	SGT3V06 SGT1V06 SGT2V06	SGA13V06 SGA11V06 SGA12V06	SGA3V06 SGA1V06 SGA2V06		
	250 300 350 400		6	MAL	450 600 600 800	SHG4V06 SHG3V06 SHG5V06 SHG7V06	SHW4V06 SHW3V06 SHW5V06 SHW7V06				SHA14V06 SHA13V06 SHA15V06 SHA17V06	SHA4V06 SHA3V06 SHA5V06 SHA7V06		
	500 600		7	MAL	900 1000	SJG2V06 SJG3V06	SJW2V06 SJW3V06				SJA12V06 SJA13V06			
	575 (600)		5	600-60 550-50	0	FAL	15	SBG2V07	SBW2V07	SBW12V07	SBR2V07	SBT2V07	SBA12V07	SBA2V07
			7½ 10		1	FAL	15 20	SCG8V07 SCG3V07	SCW8V07 SCW3V07	SCW18V07 SCW13V07	SCR8V07 SCR3V07	SCT8V07 SCT3V07	SCA18V07 SCA13V07	SCA8V07 SCA3V07
			15 20 25		2	FAL	35 45 60	SDG8V07 SDG9V07 SDG4V07	SDW8V07 SDW9V07 SDW4V07	SDW18V07 SDW19V07 SDW14V07	SDR8V07 SDR9V07 SDR4V07	SDT8V07 SDT9V07 SDT4V07	SDA18V07 SDA19V07 SDA14V07	SDA8V07 SDA9V07 SDA4V07
			30 40 50		3	FAL	60 80 90	SEG4V07 SEG6V07 SEG3V07	SEW4V07 SEW6V07 SEW3V07	SEW14V07 SEW16V07 SEW13V07	SER4V07 SER6V07 SER3V07	SET4V07 SET6V07 SET3V07	SEA14V07 SEA16V07 SEA13V07	SEA4V07 SEA6V07 SEA3V07
60 75 100		4	FAL KAL KAL		100 110 150	SFG6V07 SFG5V07 SFG1V07	SFW6V07 SFW5V07 SFW1V07	SFW16V07 SFW15V07 SFW11V07	SFR6V07 SFR5V07 SFR1V07	SFT6V07 SFT5V07 SFT1V07	SFA16V07 SFA15V07 SFA11V07	SFA6V07 SFA5V07 SFA1V07		
125 150 200		5	KAL LAL LAL		200 200 250	SGG7V07 SGG6V07 SGG1V07	SGW7V07 SGW6V07 SGW1V07		SGR7V07 SGR6V07 SGR1V07	SGT7V07 SGT6V07 SGT1V07	SGA17V07 SGA16V07 SGA11V07	SGA7V07 SGA6V07 SGA1V07		
250 300 350 400		6	MAL		350 450 500 600	SHG6V07 SHG4V07 SHG2V07 SHG3V07	SHW6V07 SHW4V07 SHW2V07 SHW3V07				SHA16V07 SHA14V07 SHA12V07 SHA13V07	SHA6V07 SHA4V07 SHA2V07 SHA3V07		
500 600		7	MAL		800 900	SJG1V07 SJG2V07	SJW1V07 SJW2V07				SJA11V07 SJA12V07			

† NEMA Size 6 & 7 starters are NEMA Type 4 painted sheet steel enclosures.

★ NEMA Type 7 & 9 bolted are not UL Listed.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes below.

NOTE: Some control transformers may require the use of oversized enclosures. Refer to control transformer selection table on Page 35.

Thermal Magnetic Circuit Breaker Type, Single Phase

Motor Voltage	Max. HP	Coil Voltage	NEMA Size	Circuit Breaker (Type)	Ampere Rating	NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)†	NEMA Type 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 12/3RA Dusttight and Driptight Industrial Use Enclosure	
						Type	Type	Type	With External Reset	Without External Reset
120	1	120	0	FAL12030	30	SBG1S2V02	SBW1S2V02	SBW31S2V02	SBA21S2V02	SBA1S2V02
	2		1	FAL12050	50	SCG1S2V02	SCW1S2V02	SCW31S2V02	SCA21S2V02	SCA1S2V02
	3		2	FAL12070	70	SDG1S2V02	SDW1S2V02	SDW31S2V02	SDA21S2V02	SDA1S2V02
230	2	230	0	FAL22025	25	SBG1S2V03	SBW1S2V03	SBW31S2V03	SBA21S2V03	SBA1S2V03
	3		1	FAL22035	35	SCG1S2V03	SCW1S2V03	SCW31S2V03	SCA21S2V03	SCA1S2V03
	7½		2	FAL22080	80	SDG1S2V03	SDW1S2V03	SDW31S2V03	SDA21S2V03	SDA1S2V03



Full Voltage Contactors and Starters – NEMA Rated

Application Data for Selection

NEMA Size	Load Volts	Maximum HP Rating—Nonplugging and Nonjogging Duty		Maximum HP Rating—Plugging and Jogging Duty †		Continuous Current Rating, Amperes—600 Volt Max.	Service-Limit Current Rating, Amperes *	Tungsten and Infrared Lamp Load, Amperes—250 Volts Max. ★	Resistance Heating Loads, KW – other than Infrared Lamp Loads ‡		KVA Rating for Switching Transformer Primaries At 50 or 60 Cycles				3 PH Rating for Switching Capacitors •	
		Single Phase	Poly-Phase	Single Phase	Poly-Phase				Single Phase	Poly-Phase	Single Phase	Poly-Phase	Single Phase	Poly-Phase		KVAR
00	115	1/2	...	...	...	9	11	5	...	...	...	...	...	...	...	
	200	...	1 1/2	...	...	9	11	5	...	...	...	...	...	...	...	
	230	1	1 1/2	...	...	9	11	5	...	...	...	...	...	...	...	
	380	...	1 1/2	...	...	9	11	...	...	...	...	...	...	...	...	
	460	...	2	...	...	9	11	...	...	...	...	...	...	...	...	
	575	...	2	...	...	9	11	...	...	...	...	...	...	...	...	
0	115	1	...	1/2	...	18	21	10	...	...	0.6	...	0.3	...	...	
	200	...	3	...	1 1/2	18	21	10	...	...	...	1.8	...	0.9	...	
	230	2	3	1	1 1/2	18	21	10	...	...	1.2	2.1	0.6	1.0	...	
	380	...	5	...	1 1/2	18	21	...	...	...	...	...	...	...	...	
	460	...	5	...	2	18	21	...	...	...	2.4	4.2	1.2	2.1	...	
	575	...	5	...	2	18	21	...	...	...	3.0	5.2	1.5	2.6	...	
1	115	2	...	1	...	27	32	15	3	5	1.2	...	0.6	...	...	
	200	...	7 1/2	...	3	27	32	15	...	9.1	...	3.6	...	1.8	...	
	230	3	7 1/2	2	3	27	32	15	6	10	2.4	4.3	1.2	2.1	...	
	380	...	10	...	5	27	32	...	...	16.5	...	...	...	...	...	
	460	...	10	...	5	27	32	...	12	20	4.9	8.5	2.5	4.3	...	
	575	...	10	...	5	27	32	...	15	25	6.2	11.0	3.1	5.3	...	
1P	115	3	...	1 1/2	...	36	42	24	...	...	...	...	...	...	...	
	230	5	...	3	...	36	42	24	...	...	...	...	...	...	...	
2	115	3	...	2	...	45	52	30	5	8.5	2.1	...	1.0	...	...	
	200	...	10	...	7 1/2	45	52	30	...	15.4	...	6.3	...	3.1	...	
	230	...	15	5	10	45	52	30	10	17	4.1	7.2	2.1	3.6	8	
	380	...	25	...	15	45	52	...	...	28	...	...	...	...	...	
	460	...	25	...	15	45	52	...	20	34	8.3	14	4.2	7.2	16	
	575	...	25	...	15	45	52	...	25	43	10.0	18	5.2	8.9	20	
3	115	...	...	...	...	90	104	60	10	17	4.1	...	2.0	...	...	
	200	...	25	...	15	90	104	60	...	31	...	12	...	6.1	...	
	230	...	30	...	20	90	104	60	20	34	8.1	14	4.1	7.0	27	
	380	...	50	...	30	90	104	...	...	56	...	...	...	...	...	
	460	...	50	...	30	90	104	...	40	68	16	28	8.1	14	53	
	575	...	50	...	30	90	104	...	50	86	20	35	10	18	67	
4	200	...	40	...	25	135	156	120	...	45	...	20	...	10	...	
	230	...	50	...	30	135	156	120	30	52	14	23	6.8	12	40	
	380	...	75	...	50	135	156	...	...	86.7	...	...	...	...	...	
	460	...	100	...	60	135	156	...	60	105	27	47	14	23	80	
	575	...	100	...	60	135	156	...	75	130	34	59	17	29	100	
		200	...	75	...	60	270	311	240	...	91	...	41	...	20	...
5	230	...	100	...	75	270	311	240	60	105	27	47	14	24	80	
	380	...	150	...	125	270	311	...	...	173	...	...	...	...	...	
	460	...	200	...	150	270	311	...	120	210	54	94	27	47	160	
	575	...	200	...	150	270	311	...	150	260	68	117	34	59	200	
		200	...	150	...	125	540	621	480	...	182	...	81	...	41	...
	230	...	200	...	150	540	621	480	120	210	54	94	27	47	160	
6▲	380	...	300	...	250	540	621	...	...	342	...	...	...	...	...	
	460	...	400	...	300	540	621	...	240	415	108	188	54	94	320	
	575	...	400	...	300	540	621	...	300	515	135	234	68	117	400	
		230	...	300	...	...	810	932	...	180	315	...	...	...	...	240
	460	...	600	...	...	810	932	...	360	625	...	...	...	...	480	
	575	...	600	...	...	810	932	...	450	775	...	...	...	...	600	

Full Voltage Contactors and Starters – NEMA Rated Application Data

Power Contact Ratings: All contactors and starters are rated in accordance with NEMA standards. The ratings shown in the selection tables are for normal service. For complete data on power contact ratings, refer to Page 12.

Short Circuit Protection: According to the National Electrical Code branch circuit overcurrent protection must be provided for each contactor or starter. For starters refer to instructions furnished with the thermal unit selection table. For contactors (Class 8502 or 8702) provide branch circuit overcurrent protection in accordance with the National Electrical Code, except do not exceed the maximum protective device ratings in table below.

NEMA Size	Maximum Voltage	Class K5, RK5 or RK1 Fuse (Ampere)	Class J or T Fuse (Ampere)	Inverse-Time Circuit Breaker (Ampere)
00	600	10	15	15
	250	12	15	15
0	600	20	30	20
	250	25	30	35
1	600	30	60	40
	250	40	60	60
2	600	60	100	80
	250	60	100	90
3	600	100	200	125
	250	125	200	150
4	600	200	400	225
5	600	400	600	400
6	600	600	1200*	800
7	600	600	1600*	1200

* Class L Fuse only

Capacitor Switching: The kilovar ratings of enclosed, three phase contactors used as switches for capacitor loads, when only one load appears on the secondary of a distribution system are shown in the table on Page 12.

Coil Burden▲

NEMA Size	No. of Poles	Inrush VA		Sealed VA		Sealed Watts	
		50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz
00	2-3		165		33		6
0 & 1	1-5	232	245	26	27	7.7	7.8
2	2 & 3	296	311	36	37	12	14
	4 & 5	429	438	37	38	12	14
3	2-3	676	700	47	46	15	14
	4-5	1260	1185	89	85	23.4	22
4	2-5						
5	2-3	2970	2970	250	212	42	39
6‡	2-3	1495	1780	56	48	27	32
7‡	2-3		1960		59		36

▲ Mean values.

‡ Size 6 and 7 have a DC coil. The values shown are for the AC input to the DC power supply that provides power to the coil.
Ambient temperature (operating temperature): 0°C - 40°C (32°F - 104°F)

Maintenance of Equipment: Class 9998 Repair Parts Kits are available for all Class 8502 contactors and Class 8536 starters. Service bulletins with a complete list of replaceable parts are supplied with all enclosed devices. Separate bulletins can be ordered and are listed along with the appropriate contact parts kit.

Device				Instruction Bulletin	Service Bulletin	Replacement Contacts Class 9998 Type
NEMA Type	Type	Series	No. of Poles			
00	SA	A	2-3		362AS	SL2
		B	2-3	30072-013-08	556AS	SJ1
0	SB	A&B	1-3	30072-013-09	277AS	SL2
			4		277AS & 250AS	SL12 & (1)SL22
			5		277AS & 250AS	(1)SL2 & (2)SL22
1	SC	A&B	1-3	30072-013-10	278AS	SL3
			4		278AS & 250AS	SL13 & (1)SL22
			5		278AS & 250AS	(1)SL3 & (2)SL22
1P	SC	A	2	30072-013-10	278AS	SL3
2	SD	A	2-3	30072-013-11	279AS	SL4
			4		279AS & 293AS	SL14 & (1)SL24
			5		279AS & 293AS	(1)SL4 & (2)SL24
3	SE	A	2	30072-013-01	305AS	SL6
			3	30072-013-01	305AS	SL7
			4	30072-013-03	326AS	(2)SL6
			5	30072-013-03	326AS	(1)SL6 & (1)SL7
4	SF	A	2	30072-013-02	306AS	SL8
			3	30072-013-02	306AS	SL9
			4	30072-013-03	326AS	(2)SL8
			5	30072-013-03	326AS	(1)SL8 & (1)SL9
5	SG	A	2	30072-013-18	328AS	SL10
			3	30072-013-18	328AS	SL11
6	SH	A	2		342AS	SL25
			3		342AS	SL26
6	SH	B	2	30072-013-12	370AS	SL25
			3	30072-013-12	370AS	SL26
7	SJ	A	2	30072-013-13	397AS	SL30
			3	30072-013-13	397AS	SL31

Terminals

NEMA Size	Type	Power Terminals		Control Terminals	
		Type of Lug	Wire Sizes* Min.-Max.	Type of Lug	Wire Sizes* Min.-Max.
00, 0 & 1	SA, SB & SC	Pressure Wire	#14-#8	Pressure Wire	#16-#12
2	SD	Box Lug	#14-#4	Pressure Wire	#16-#12
3	SE	Box Lug	#14-1/0	Pressure Wire	#16-#12
4	SF	Box Lug	#8-250 kcmil	Pressure Wire	#16-#12
5	SG	Box Lug	#4-500 kcmil	Pressure Wire	#16-#12
6	SH	Parallel Groove	One or two 250-500 kcmil per phase	Pressure Wire	#16-#12
7	SJ	Parallel Groove	One to four 250-500 kcmil per phase	Pressure Wire	#16-#12

* Solid or stranded copper wire. One wire per connector.

Coil temperature: Not more than 85°C rise in 40°C ambient (125°C max.).



Full Voltage Contactors & Starters – NEMA Rated Application Data

Auxiliary Units

Auxiliary contacts, power poles, and timer attachments can be added by the factory or in the field on all Type S starters and contactors. The table below shows the maximum number of auxiliary units (**in addition to the holding circuit contact**) that can be added to a given size starter or contactor. In addition, it is possible to add a second internal contact on NEMA Size 0, 1, and 2 contactors and starters.

NEMA Size	Type	No. of Poles of Basic Contactor	Maximum Number of External Auxiliary Units (In addition to holding circuit contact)
00	SA	2-3	4 single circuit auxiliary contacts (N.O. or N.C.) if second internal auxiliary contact is not used.
0, 1 and 2	SB SC SD	1, 2 or 3	4 single circuit auxiliary contacts (N.O. or N.C.)
			3 single circuit auxiliary contacts (N.O. or N.C.) plus 1 attached timer (ON or OFF delay).
			2 single circuit auxiliary contacts (N.O. or N.C.) plus 1 power pole adder (1 or 2 poles, N.O. or N.C.)
		4 or 5	1 attached timer (ON or OFF delay) plus 1 power pole adder (1 or 2 poles, N.O. or N.C.) plus 1 auxiliary contact.
3, 4 & 5	SE SF SG	2-5 (Size 3 & 4)	4 single circuit auxiliary contacts (N.O. or N.C.)
		2-3 (Size 5)	2 single circuit (Sizes 3 & 4) or 3 single circuit (Size 5) auxiliary contacts plus 1 attached timer (ON or OFF delay).
6 and 7	SH SJ	2-3	2 single circuit auxiliary contacts (N.O. or N.C.) plus 1 NEMA Size 0-1 or Size 2 power pole adder (1 or 2 poles, N.O. or N.C.)
			4 single circuit auxiliary contacts (N.O. or N.C.)

Factory Installed Auxiliary Contacts

The table below lists the Form designations for factory installed electrical contacts. See Factory Modifications (Forms) section for pricing.

See Class 9999 for field modification kits.

Form Number Of Additional Auxiliary Contacts

When ordering factory installed auxiliary contacts, the Form designations listed should be used.

Number of N.O. Contacts	Number of N.C. Contacts	Form Number
0	1	X01
0	2	X02
0	3	X03
0	4	X04
1	0	X10
1	1	X11
1	2	X12
1	3	X13
2	0	X20
2	1	X21
2	2	X22
3	0	X30
3	1	X31
4	0	X40

Control Circuit Transformers

Class 9070 Type T control transformers are normally used when it is necessary to provide a lower voltage to the control circuit. This transformer with fused protection may be ordered from the factory by specifying Form F4T. The addition of a transformer often requires the use of a larger enclosure (refer to dimensions on Page 17–19). The table below shows the transformer selection for given sized starters and contactors with or without auxiliary units.

NEMA Size	Type	No. of Poles	Auxiliary Units	Transformer Class 9070 Type
0 & 1	SB SC	1-3	With max. of 2 auxiliary contacts	T50
			With timer and maximum of 1 auxiliary contact	
			With 3 or 4 auxiliary contacts With timer and 2 or 3 auxiliary contacts	T100
0 & 1	SB SC	4 & 5	With or without auxiliary contacts or timer	T100
0 & 1 Mechanically Interlocked Devices	SB SC	1-5	With or without attachments	T100
2	SD	2-5	With or without attachments	T100
3	SE	2-3	With or without attachments	T150
3	SE	4 & 5	With or without attachments	T300
4	SF	2-5	With or without attachments	T300
5	SG	2-3	Any	T500
6, 7	SH, SJ	2-3	Any	#

A Class 9070 transformer is an integral part of the Size 6 and Size 7 control circuit providing 120 volt control circuit voltage as standard.

Power Poles

Single or double circuit power pole adders may be factory or field installed on 2 and 3 pole Type S contactors and starters. The table below lists the Form designation for factory installed power pole adders. Only one power pole adder may be installed per contactor. See Factory Modifications (Forms) section for pricing.

See Class 9999 for field modification kits.

Type	NEMA Size	Class 9999 Type	Form Designation
1 N.O.	0, 1 2	SB6 SB11	Y428 Y436
1 N.C.	0, 1 2	SB7 SB12	Y429 Y437
1 N.O., 1 N.C.	0, 1 2	SB8 SB13	Y435 Y440
2 N.O.	0, 1 2	SB9 SB14	Y430 Y438
2 N.C.	0, 1 2	SB10 SB15	Y434 Y439



File E78360
CCN NITW2

Transformers




File E61239
CCN XPTQ




File LR37055
Class 5411 06



Full Voltage Contactors and Starters – NEMA Rated Application Data

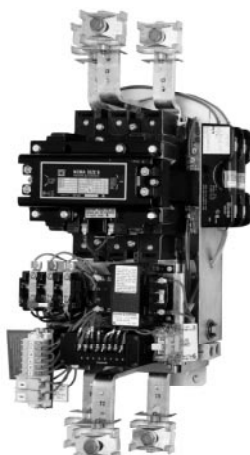

NEMA Size 6 Starter
8536 SH

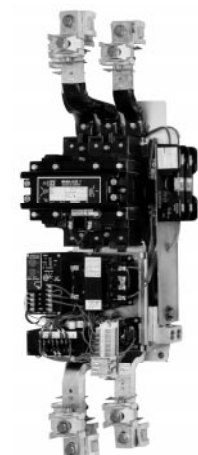

NEMA Size 7 Starter
8536 SJ

NEMA Size 6 Type SH and NEMA Size 7 Type SJ

contactors and starters have a DC coil operated by a solid state rectifier circuit mounted on the device and powered from an ac source. The NEMA Sizes 6 and 7 are equipped as standard with a fused control circuit transformer (Form F4T) rated 240/480-120 volts 60 Hz, 220/440-110 volts 50 Hz. The purpose of this transformer is to provide an isolated 120 volts 60 Hz, 110 volts 50 Hz, supply for the control circuit. NEMA Sizes 6 and 7 may be ordered for other system voltages by specifying the voltage and frequency desired.

Operation Rates – Continuous operation rate: 3 operations/minute maximum. Jogging or Plugging Duty: 15 operations/minute - 3 minutes maximum.

Field conversion for other system voltages is accomplished by one of the following methods, NOT BY THE USUAL PRACTICE OF CHANGING THE COIL:

1. If the factory wiring is indicated as being for 480 volts 60 Hertz, 440 volts 50 Hertz, conversion to 240 volts 60 Hertz, 220 volts 50 Hertz, can be accomplished by reconnecting the control transformer as illustrated on instruction sheet supplied with the controller. This is the same method that would be used on Class 9070 control circuit transformers.

Conversion to any other voltage requires replacement of the control transformer. For other system voltages: i.e. 208, 277, 380, 600 volts, a new transformer with single voltage primary must be selected from table at right. Control transformer connections are illustrated on the instruction sheet supplied with the controller.

2. If the factory wiring is indicated as being for any voltage other than 480 volts 60 Hertz, 440 volts 50 Hertz, conversion to any other voltage requires replacement of the control transformer. Refer to table at right.
3. In Square D combination starters, the standard transformer supplied may be used to power a maximum of five Class 9001 Type K illuminated operators powered with transformer type light modules. When extra capacity to power control relays or other inductive loads is required, a second transformer must be added. Extra capacity can be purchased as Form F4T with additions in 100 VA increments.
4. Standard controllers are wired for common control and are not convertible for operation of the control circuit from a separate source of supply voltage. Controllers designated Form S have special wiring designed for separate control. They are furnished with an isolating transformer, usually having a 120 volt primary and 120 volt secondary, that must not be bypassed. Form S controllers are not convertible for operation on common control.

The tables below give the replacement transformers for Type S NEMA Sizes 6 and 7 contactors and starters. To change voltages on these devices, coils are not changed, instead transformers with the desired voltage are changed.

Replacement Control Transformers (150VA) For Type S Size 6

Voltage		Class 9070 Type
60 Hertz	50 Hertz	
240/480-120	220/440-110	31104-512-50
208-120		31104-512-52
277-120		31104-512-53
.....	380-110	31104-512-54
600-120	550-110	31104-512-51
120-120	110-110	31104-512-55
240-120	220-110	31104-512-56

Replacement Control Transformers (200VA) For Type S Size 7

Voltage		Class 9070 Type
60 Hertz	50 Hertz	
240/480-120	220/440-110	31123-501-50
208-120		31123-501-52
277-120		31123-501-53
.....	380-110	31123-501-54
600-120	550-110	31123-501-51
120-120	110-110	31123-501-55
240-120	220-110	31123-501-56

Auxiliary Contacts: A N.O. holding circuit contact and a N.C. auxiliary contact are provided as standard. The holding circuit contact may or may not be required for either 3-wire or 2-wire control. NEMA Sizes 6 and 7 have an additional N.C. auxiliary contact which is wired in the coil control circuit. **DO NOT USE THIS N.C. CONTACT FOR ANY OTHER PURPOSE.**



Combination Starters – NEMA Rated

Application Data – Class 8538, 8539

Class 8539 – UL Listed Short Circuit Ratings

MAG-GARD® Motor Circuit Protector Type			
NEMA Size	Voltage	Enclosure	Available Amperes RMS Symmetrical
0 & 1, 2 Size 3 Type SE*41 & SE*51 Only (GJL)	0-480	Standard† and Oversize	100,000
0 & 1 (FAL)	0-480	Standard† and Oversize	22,000
0 & 1 (FAL)	481-600	Standard† and Oversize	10,000
0 & 1, 2 Size 3 Type SE*41 & SE*51 Only (GJL)	481-600	Standard† and Oversize	10,000
0-2 with Current Limiting Module	600	Oversize	100,000
0-3 with Current Limiting Module	600	Standard†	100,000
0-3	600	NEMA 7 & 9	5,000•
2	600	Oversize	22,000
2-6	600	Standard†	22,000
4 & 5	600	NEMA 7 & 9	10,000
7	0-480	Standard†	30,000
7	481-600	Standard†	22,000

† Standard enclosure includes non-oversize NEMA Types 1, 4 & 4X Stainless, and 12.
• Consult factory for higher withstand ratings.

Table 1: MAG-GARD Trip Range

Suffix No.		Suffix No.	Range Amps	Suffix No.	Range Amps	Suffix No.	Range Amps
M01	9-33	11M	8-28	25M	625-1250	33M	1500-3000
M02	21-77	12M	18-70	26M	750-1500	35M	1750-3500
M03	45-165	13M	50-180	29M	875-1750	36M	2000-4000
M04	90-330	15M	100-350	30M	1000-2000	40M	2500-5000
M05	150-550	16M	150-580	31M	1125-2250	42M	3000-6000
M06	225-825	18M	300-1100	32M	1250-2500	44M	3500-7000

The MAG-GARD adjustable trip range is determined by the suffix of the circuit breaker catalog number. Table 1 indicates the trip range which corresponds to a given suffix number. The MAG-GARD Motor Circuit Protector should be adjusted to a level just above Locked-Rotor Current of the motor. This setting will provide optimum overcurrent protection for the motor. For more information on MAG-GARD instantaneous trip circuit breakers, refer to the MAG-GARD circuit breaker section of this Catalog.

Terminals

NEMA Size	Type	Line Terminals on Disconnect		Power Terminals On Magnetic Starter			Control Terminals On Magnetic Starter		
		Type of Lug	Wire Size Min.-Max.	Type of Lug	Wire Size Min.-Max.	Wires Per Terminal	Type of Lug	Wire Size Min.-Max.	Wires Per Terminal
0 & 1	SB & SC	Box Lug	#14-1/0 Cu/Al	Pressure Wire	#14-#8 Cu	1 or 2	Pressure Wire	#16-#12 Cu	2
2	SD	Box Lug	#14-1/0 Cu/Al	Box Lug	#14-#4 Cu	1	Pressure Wire	#16-#12 Cu	2
3	SE	Box Lug	#14-1/0 Cu/Al	Box Lug	#14-#0 Cu	1	Pressure Wire	#16-#12 Cu	2
4	SF	Box Lug	#6-300 MCM Cu/Al	Box Lug	#8-250 MCM Cu	1	Pressure Wire	#16-#12 Cu	2
5	SG	Box Lug	One #4-500 MCM Cu	Box Lug	#4-500 MCM Cu	1	Pressure Wire	#16-#12 Cu	2
6	SH	Box Lug		Parallel Groove	250-500 MCM Cu●	1 or 2	Pressure Wire	#16-#12 Cu▲	2
7	SJ	Box Lug		Parallel Groove	250-500 MCM Cu	1-4	Pressure Wire	#16-#12 Cu	2

● Order Class 9999 Type SAL-16 parts kit to convert power terminals to accept sizes 1/0-300 MCM wire.
▲ Terminal block range limited to #16-#14.
▼ Use on FAL circuit breakers rated 25 Amps or less.

Class 8539 – UL Listed Short Circuit Ratings

Thermal Magnetic Circuit Breaker Type			
NEMA Size	Voltage	Enclosure	Available Amperes RMS Symmetrical
0-3	600	Standard†	5,000
4 & 5	600	Standard†	10,000
6	600	Standard†	18,000
7	0-480	Standard†	30,000
7	481-600	Standard†	22,000

† Standard enclosure includes non-oversize NEMA Types 1, 4 & 4X Stainless, and 12.

Class 8538 – UL Listed Short Circuit Ratings

NEMA Size	NEMA Fuse Class	Enclosure	Available Amperes RMS Symmetrical
0-3	Class H or K	Standard†	5,000
0-3	Class R	Standard†	100,000
0-2	Class H or K	Oversize	5,000
0-2	Class R	Standard	100,000
4-5	Class H or K	Standard†	10,000
4-5	Class R	Standard†	100,000
6	Class H or K	Standard†	18,000
6	Class R	Standard†	100,000

† Standard enclosure includes non-oversize NEMA Types 1, 4 & 4X Stainless, and 12.

Table 2: Motor Code Letter Table

Horsepower	Motor Code Letters
½ or less	A-L
¾ — 1½	A-K
2 — 3	A-J
5 — 25	A-H
30 — 125	A-G
150 or more	A-F

The combination starter selection tables on Pages 7 — 9 are suitable for motors with Locked-Rotor Current letters per NEC Table 430-7(b) as listed in Table 2. For other motors a special thermal magnetic circuit breaker with adjustable magnetic trip settings for the specific motor is required. When ordering for these special applications, specify the motor horsepower, voltage, frequency, full load current and code letter (or locked rotor current) to assure proper protection.



Combination Starters — NEMA Rated Approximate Dimensions, Shipping Weights – Class 8538, 8539

NEMA Type 1 Enclosure – Figure 1

NEMA Size	Class	Type	Dimensions in Inches*																Top & Bottom		Sides	Wt. (Lbs.)
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	W	X	Y	
0-1	8538 & 8539	SBG SCG	9½	22½	8½	6¾	20½	14½	1¾	1½	3	2½	1½	¾	2¾	1¼	⅞	...	½-¾	½-¾	½	38
2	8538 & 8539	SDG	10½	26	9½	7¾	24	16½	2½	2	4	2½	1½	¾	2¾	1¼	⅞	...	1-1¼	½-¾	½	54

* Above dimensions include space for control circuit transformers.

NEMA Type 1 Enclosure – Figure 2

NEMA Size	Class	Type	Dimensions in Inches*																Top & Bottom		Sides	Wt. (Lbs.)
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	W	X	Y	
3	8538 & 8539	SEG	15¼	42	10½	9¼	3	22½	41	½	...	2½	3½	5	2½	5¾	1¾	2¾	1-1¼ 2-2½	½-¾	½	102
4	8538	SFG	16	52½	10½	10	3	23½	51½	½	...	2½	3½	5	2½	5¾	1¾	2¾	2½	½-¾	½	163
	8539	SFG	16	52½	10½	10	3	23½	51½	½	...	2½	3½	5	2½	5¾	1¾	2¾	2½	½-¾	½	163
5	8538	SGG	20	78	15½	12	4	29½	77	½	...	3¾	4¾	9¼	3¾	...	...	...	½-¾	3	...	450
	8539	SGG	20	66	13½	12	4	29½	65	½	...	3¾	4¾	5	3¾	...	...	...	½-¾	3	...	420
6	8538 & 8539	SHG	36	90	21½	...	...	41¾	...	...	...	...	...	5	...	...	...	...	...	...	...	...

† Left side only

▲ Size 6 enclosures are floor mounting.

* Above dimensions include space for control circuit transformers.

■ Class 8538 Size 3 devices with 200 Amp fuse clips use dimensions for Class 8538 Size 4.

NEMA Type 12 Enclosure – Figure 3

NEMA Size	Class	Type	Dimensions in Inches*										Wt. (Lbs.)
			A	B	C	D	E	F	G	H	I	J	
0-1	8538 & 8539	SBA SCA	9½	8½	24	3¼	2½	4½	23½	1¾	4½	14½	40
2	8538 & 8539	SDA	10½	9½	27¾	3¼	2½	5½	27	¾	4½	16½	55
3	8538 & 8539	SEA	15¼	10½	42	5	3	9¼	41	½	5½	22½	111
4	8538	SFA	16	10½	52½	5	3	10	51½	½	4¾	22½	170
	8539	SFA	16	10½	52½	5	3	10	51½	½	5½	22½	170
5	8538	SGA	20	13½	78	9¼	4	12	77	½	7½	29½	...
	8539	SGA	20	13½	66	5	4	12	65	½	7½	27½	440
6	8538 & 8539	SHA	36	17	90	5	...	...	...	...	...	47¾	...

▲ Size 6 enclosures are floor mounting.

* Above dimensions include space for control circuit transformers.

■ Class 8538 Size 3 devices with 200 Amp fuse clips use dimensions for Class 8538 Size 4.

NOTE: Illustrations may not represent the actual enclosure, they are intended for dimensional information only.

NEMA Type 12 Enclosures Modified for Outdoor Applications (not to be used in salt air or corrosive environments)

Field Modifications for NEMA Type 3 dusttight, raintight and sleet resistant outdoor applications are as follows:
Watertight conduit hubs or equivalent provision for watertight connection at the conduit entrance shall be used.

Field Modifications for NEMA Type 3R rainproof and sleet resistant outdoor applications are as follows:

1. Watertight conduit hubs or equivalent provision for watertight connection at the conduit entrance, when the conduit enters at a level higher than the lowest live part, shall be used.
2. Drain holes of 1/8 inch diameter shall be added to the bottom of the enclosure.

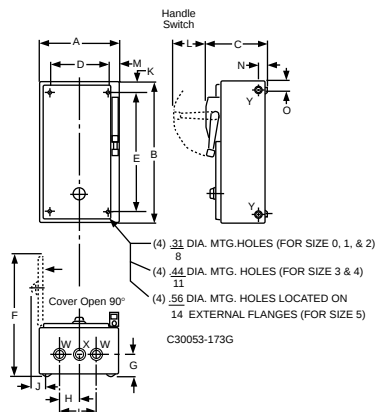


Figure 1
NEMA Type 1 Enclosure

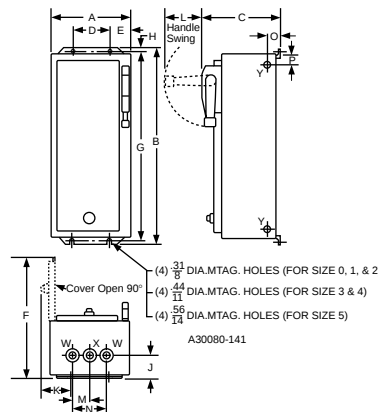


Figure 2
NEMA Type 1 Enclosure

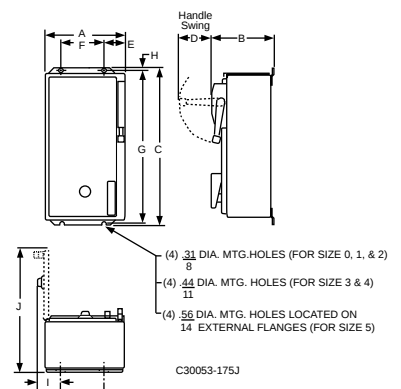


Figure 3
NEMA Type 12 Enclosure



Combination Starters — NEMA Rated
Approximate Dimensions, Shipping Weights




Figure 1

NEMA 4X
Polyester Enclosure




Figure 2

Class 8538 — Horizontal Type
NEMA Type 12




Figure 3

Class 8538 and 8539
In Oversize Enclosures —
NEMA Type 1, 4 & 4X
Stainless, 12




Figure 4

Class 8538 and 8539
Stainless Steel Enclosure
NEMA Type 4 & 4X

NEMA Type 4X Polyester Enclosure

NEMA Size	Class	Dimensions (in inches)* — see Figure 1					
		Type	A	B	C	E	F
0, 1	8538	SBW	13.72	11.4	26.94	6.25	25.75
0, 1, & 2		SCW					
		SDW					
0, 1, & 2	8738 8739	SBW SCW SDW	25.25	11.4	27.00	17.88	25.75
3 - 4	8538, 8738 8539, 8739	SEW SFW●	26.31	11.4	33.50	18.50	32.25

* Dimensions also for **Form F4T** (standard control transformer) and **Form F4T10** (50 VA additional capacity). Other control transformers may require the use of oversized enclosures. Refer to the control transformer selection table on Page 35.
● 8539 Size 4 only.

Information on Hubs

Hubs are supplied with each NEMA Type 4X combination starter as shown in the table below. Note that hubs are only installed in stainless steel enclosures; they are not installed in polyester enclosures.

NEMA Size	Quantity	Hub Size
0 & 1	1 2	0.75" 1.00"
2	1 2	0.75" 1.50"
3 & 4	1 2	0.75" 2.50"


NEMA Type 4 & 4X Stainless Enclosures — Figure 4

NEMA Size	Class	Type	Dimensions in Inches*												Bottom	Top & Bot.	Wt. (Lbs.)
			A	B	C	D	E	F	G	H	I	J	K	L	W	X	
0-1	8538 & 8539	SBW SCW	9½	8½ ³²	24½ ₁₆	3¼	2½	4½	23½	19½ ³²	3½ ³²	1½ ₁₆	2½ ₁₆	149½ ³²	¾ Hub	1 Hub	40
2	8538 & 8539	SDW	10½	9½ ³²	27¾	3¼	2½	5½	27	19½ ³²	3	2	2½	161½ ³²	¾ Hub	1½ Hub	55
3●	8538 & 8539	SEW	15¼	10½ ³²	42	5	3½ ₁₆	10¾	40½	19½ ³²	3	2½ ₁₆	3½ ₁₆	223½ ₁₆	¾ Hub	2½ Hub	111
4	8538	SFW	16	10½ ³²	52½	5	3½ ₁₆	11	51	19½ ³²	3	2½ ₁₆	3½ ₁₆	221½ ³²	¾ Hub	2½ Hub	158
	8539	SFW	16	10½ ³²	52½	3¼	2½	11	51	19½ ³²	3	2½ ₁₆	3½ ₁₆	221½ ³²	¾ Hub	2½ Hub	120
5	8538	SGW	20	13½ ³²	78	9¼	4	12	77	9½ ₁₆	4½ ₂	3	3½	291½ ³²	¾ Hub	3½ Hub	...
	8539	SGW	20	13½ ³²	66	5	4	12	65	9½ ₁₆	4½ ₂	3	3½	291½ ³²	¾ Hub	3½ Hub	440
6▲	8538 & 8539	SHW	36	17	90	...	...	...	...	...	...	...	...	47½	...	...	...

* Dimensions also for **Form F4T** (standard control transformer), **Form F4T11** (100 VA extra capacity) and **Form F4T12** (200 VA extra capacity).
▲ Size 6 enclosures are floor mounting.
● Class 8538 Size 3 devices with 200 Amp fuse clips use dimensions for Class 8538 Size 4.

NEMA Type 1, 4, 4X Stainless, 12 Oversize Enclosure — Figure 3

NEMA Size	NEMA Type Encl.	Dimensions in Inches					
		Wide A	High B	Deep C	Handle L	Mounting D	E
0-2	1	15	28¾	9½	3¼	11½	26¼
	4	15	30½	9½	3¼	10	29¼
	12	15	31	10½	3¼	9	30¼

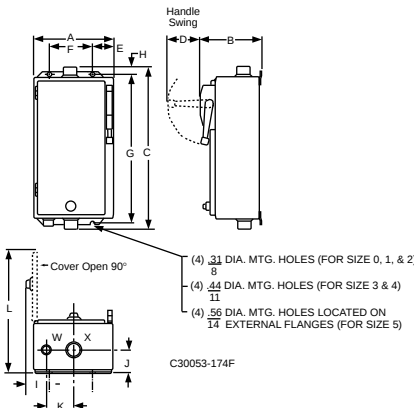

Combination Starters — NEMA Rated Approximate Dimensions, Shipping Weights

Class 8539 – NEMA Type 7 & 9 Bolted Enclosure – Figure 1★


NEMA Size	Type	Dimensions in Inches												Wt. (Lbs.)
		A	B	C	D	E	F	G	H, J	K, L, M, N	P	Z		
0-2	SBT SCT SDT	14¼	27½	9½	12¼	19¼	9⅞	11	2⅝	3⅞	1½	1½	115	
3-4	SET SFT	18⅞	31⅝	10	16¼	19¼	9⅞	12⅝	2⅝	3¾	2½	2½	180	
5	SGT	24½	45⅝	13¾	22½	27½	13¾	15⅝	3⅙	4	4	4	500	

★ NOTE – Bolted enclosure comes equipped with 3 closing plates in the door.


★ NOTE – Bolted enclosure comes equipped with 3 closing plates in the door.

Class 8539 – NEMA Type 7 & 9 SPIN TOP® Enclosure – Figure 2

NEMA Size	Type	Dimensions in Inches														Wt. (Lbs.)
		E	F	G	H	J	K	L	M	N	P	Q	R	S	T	
0-1	SBR SCR	10⅞	26	15¼	8	4¾	5⅞	1½	1⅞	7½	11	7⅞	2⅞	—	—	70
2	SDR	13⅞	30½	19¼	8	4¾	5¼	1½	1⅞	7	18	9⅞	2¾	—	—	115
3-4	SER SFR	13⅞	39½	20¼	8	4¾	7½	2½	—	10½	23	8⅞	3	—	—	140
5	SGR	19	53½	27¾	—	—	11¼	4	⅔	16	20⅞	11⅞	4⅞	12	6½	290

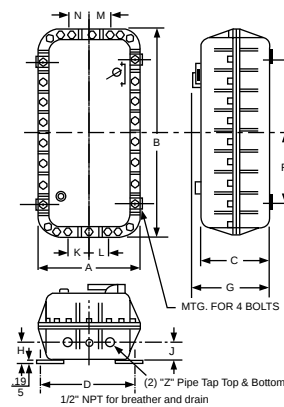

**Figure 3: Class 8539
NEMA Type 7 and 9 Bolted Enclosure**

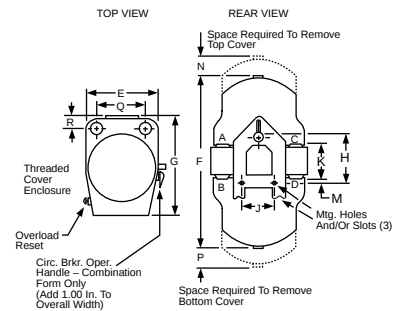

**Figure 4: Class 8539
NEMA Type 7 and 9 SPIN TOP® Enclosure**


Combination Starters — NEMA Rated
Panel Layout Drawings – Class 8538, 8539

Standard NEMA Type 1, 4 & 4X Stainless, 12

The following table is provided to identify open panel space on standard NEMA Type 1, 4 & 4X stainless steel and 12 combination starters. Space and mounting holes are provided in all combination starters (except NEMA Type 7 & 9 SPIN TOP®) for the field addition of a control transformer – see Page 35 for control transformer selection.


Class	NEMA Size	Dimensions in Inches								
		A	B	C	D	E	F	G	H	I
8538	0, 1	6.9	18.5	6.9	6.5	0	3.5	3.4	6.9	4.0
8539				6.5	7.9					—
8538	2	7.9	22.0	7.5	7.0	3.1	4.8	0	7.7	6.0
8539				6.5	8.4					—
8538	3	12.0	29.5	9.0	7.7	0	5.6	6.4	12.9	5.3
8539				FAL: 6.5 KAL: 6.8	FAL: 8.5 KAL: 10.5					—
8538	4	13.0	39.0	11.0	11.5	0	7.0	6.0	13.0	9.0
8539				6.8	12.5					—
8538	5*	17.3	59.0	13.5	25.0	0	10.8	6.5	20.5	—
8539				KAL: 6.8 LAL: 9.0	KAL: 23.0 LAL: 24.5					—
8538	6	32.0	82.0	32.0	40.0	0	13.0	19.0	35.0	—
8539				LAL: 9.0 MAL: 12.5	LAL: 25.5 MAL: 40.5					—

* Size 5 combination starter does not contain a full size panel. No usable panel space is available.

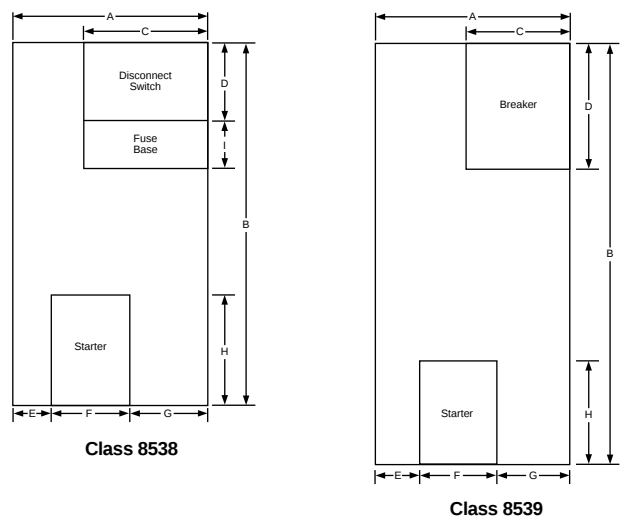

Oversize Enclosures, NEMA Type 1, 4 & 4X Stainless, 12

Combination starters in oversized enclosures provide additional panel space for field addition of control relays, timing relays, terminal blocks or other auxiliary equipment. Disconnect type devices offer over 130 square inches of available panel space. Circuit breaker type devices offer over 180 square inches of available panel space.

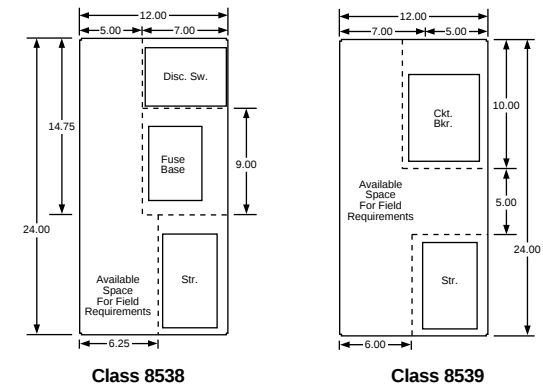

Reversing Combination Starters — NEMA Rated Class 8738, 8739

General – Class 8738 and 8739 Type S reversing combination starters combine the requirements of motor overload and short circuit protection into one convenient package. Type S reversing combination starters are manufactured in accordance with NEMA standards, are UL Listed, and CSA certified. ● Class 8738 and 8739 reversing combination starters are designed to operate at 600 Volts AC, 50-60 Hz. Type S reversing combination starters are supplied with melting alloy overload relays as standard.

Enclosures – Class 8738 and 8739 reversing combination starters are available in the following enclosures:

NEMA Type 1 General Purpose

NEMA Type 4 & 4X Watertight and Dusttight

NEMA Type 4X Watertight, Dusttight, and Corrosion Resistant Glass-Polyester

NEMA Type 7 & 9 Bolted and Spin-Top® for Hazardous Locations (Class 8739 only) NEMA Type 12 Dusttight and Driptight for Industrial Use

The NEMA Type 4 & 4X stainless steel enclosure (Sizes 0 - 5) has a brushed finish. Size 6 & 7 are sheet steel enclosures and are rated NEMA Type 4 only. For an electropolished finish, specify **Form G16** and add 15% to the price of the standard device. Hubs are supplied as standard on NEMA Type 4 & 4X enclosures.

The NEMA Type 4X glass-polyester enclosed devices are UL Listed. Hubs are supplied as standard on NEMA Type 4X enclosures.

NEMA Type 12 enclosures may be field modified for outdoor applications with **Form G26**. Contact your local Square D Field Sales Office for additional information.

Also, NEMA Type 12 devices are available UL Listed for use in Class II, Division 2, Group G and Class III, Divisions 1 and 2 locations. Request **Form G21**, no additional charge.

Coil Voltages – AC coils are available for application on 50/60 Hz. NEMA Sizes 00 - 5 are supplied with coils that are designed to operate satisfactorily on line voltages of 85%-110% of rated voltage. NEMA Size 6 and 7 contactors are supplied with a DC coil operated by a solid state rectifier circuit that is powered by an AC source.

Please note that Voltage Codes have been added to the Type designations in order to improve customer service. It is necessary to include the Voltage Code when ordering combination starters. Also, 120 Volt Polyphase combination starters will be wired for **separate control**.

Auxiliary Contacts – Additional auxiliary contacts may be added to Type S starters. See Page 14 for maximum number of auxiliary units and Form designations for factory installed auxiliary contacts. See Catalog 9999CT9701 for auxiliary contact kits for field installation.

Type S Accessories – Additional accessories such as fuse blocks, fuse clip kits, disconnect switch and circuit breaker interlocks, and cover mounted control stations are available for field modifications. For factory modifications (Forms), see Pages 30-34. For field modification kits, see Catalog 9999CT9701.

3-Pole Polyphase - 600 Volts AC Maximum - 50-60 Hz

Thermal Units - Devices require 3 thermal units, see Catalog 9065CT9701 for selection information.

Class 8738 Full Voltage Type, Reversing With Melting Alloy Overload Relays

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA Type 4X★ Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 12 Dusttight and Driptight Industrial Use Enclosure
Motor Voltage (Starter Voltage)	Max. HP Polyphase	Coil Voltage*	NEMA Size	Fuse Clip Size Amps	Type	Type	Type	Type
200 (208)	3	208-60	0	30	SBG12V08	SBW12V08	SBW22V08	SBA22V08
	5		1	30	SCG12V08	SCW12V08	SCW22V08	SCA22V08
	7½		1	60	SCG13V08	SCW13V08	SCW23V08	SCA23V08
	10		2	60	SDG12V08	SDW12V08	SDW22V08	SDA22V08
	20		3	100	SEG15V08	SEW15V08		SEA25V08
	40		4	200	SFG15V08	SFW15V08		SFA25V08
	75		5	400	SGG15V08	SGW15V08		SGA25V08
230 (240)	3	240-60 220-50	0	30	SBG12V03	SBW12V03	SBW22V03	SBA22V03
	5		1	30	SCG12V03	SCW12V03	SCW22V03	SCA22V03
	7½		1	60	SCG13V03	SCW13V03	SCW23V03	SCA23V03
	15		2	60	SDG12V03	SDW12V03	SDW22V03	SDA22V03
	25		3	100	SEG15V03	SEW15V03		SEA25V03
	50		4	200	SFG15V03	SFW15V03		SFA25V03
	100		5	400	SGG15V03	SGW15V03		SGA25V03
460 (480)	5	480-60 440-50	0	30	SBG13V06	SBW13V06	SBW23V06	SBA23V06
	10		1	30	SCG14V06	SCW14V06	SCW24V06	SCA24V06
	15		2	30	SDG16V06	SDW16V06	SDW26V06	SDA26V06
	25		2	60	SDG14V06	SDW14V06	SDW24V06	SDA24V06
	50		3	100	SEG13V06	SEW13V06		SEA23V06
	100		4	200	SFG13V06	SFW13V06		SFA23V06
	200		5	400	SGG13V06	SGW13V06		SGA23V06
575 (600)	5	600-60 550-50	0	30	SBG13V07	SBW13V07	SBW23V07	SBA23V07
	10		1	30	SCG14V07	SCW14V07	SCW24V07	SCA24V07
	15		2	30	SDG16V07	SDW16V07	SDW26V07	SDA26V07
	25		2	60	SDG14V07	SDW14V07	SDW24V07	SDA24V07
	50		3	100	SEG13V07	SEW13V07		SEA23V07
	100		4	200	SFG13V07	SFW13V07		SFA23V07
	200		5	400	SGG13V07	SGW13V07		SGA23V07

- Most Square D combination starters are pending CSA approval. Please have your Square D representative contact the factory.
- * Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes below and insert as shown in the How To Order block.
- ★ NEMA Type 4x polyester devices are not UL Listed.

Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24†▲	...	V01
120†	110	V02
208	...	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.

† These voltage codes must include **Form S** (supplied at No Charge).

Standard unit



File E152395
CCN NKJH, NKJH7



File LR584
Class 3211.04

Explosion proof unit



File E10214
CCN NOTH

Note that not all units are
or explosion proof.
Consult factory.



Reversing Combination Starters – NEMA Rated Non-Fusible and Fusible Disconnect Switch Type – Class 8738

3-Pole Polyphase – 600 Volts AC Maximum – 50-60 Hz

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

Non-Fusible Disconnect Switch Type – Full-Voltage Type Reversing with Melting Alloy Overload Relays

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA Type 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Poly- Phase	Coil Voltage *	NEMA Size	Fuse Clip Size Amps	Type	Type	Type	With External Reset	Without External Reset
200 (208)	3	208-60	0	None	SBG11V08	SBW11V08	SBW21V08	SBA21V08	SBA11V08
	7½		1	None	SCG11V08	SCW11V08	SCW21V08	SCA21V08	SCA11V08
	10		2	None	SDG11V08	SDW11V08	SDW21V08	SDA21V08	SDA11V08
	25		3	None	SEG11V08	SEW11V08		SEA21V08	SEA11V08
	40		4	None	SFG11V08	SFW11V08		SFA21V08	SFA11V08
	75		5	None	SGG11V08	SGW11V08		SGA21V08	SGA11V08
230 (240)	3	240-60 220-50	0	None	SBG11V03	SBW11V03	SBW21V03	SBA21V03	SBA11V03
	7½		1	None	SCG11V03	SCW11V03	SCW21V03	SCA21V03	SCA11V03
	15		2	None	SDG11V03	SDW11V03	SDW21V03	SDA21V03	SDA11V03
	30		3	None	SEG11V03	SEW11V03		SEA21V03	SEA11V03
	50		4	None	SFG11V03	SFW11V03		SFA21V03	SFA11V03
	100		5	None	SGG11V03	SGW11V03		SGA21V03	SGA11V03
460 (480)	5	480-60 440-50	0	None	SBG11V06	SBW11V06	SBW21V06	SBA21V06	SBA11V06
	10		1	None	SCG11V06	SCW11V06	SCW21V06	SCA21V06	SCA11V06
	25		2	None	SDG11V06	SDW11V06	SDW21V06	SDA21V06	SDA11V06
	50		3	None	SEG11V06	SEW11V06		SEA21V06	SEA11V06
	100		4	None	SFG11V06	SFW11V06		SFA21V06	SFA11V06
	200		5	None	SGG11V06	SGW11V06		SGA21V06	SGA11V06
575 (600)	5	600-60 550-50	0	None	SBG11V07	SBW11V07	SBW21V07	SBA21V07	SBA11V07
	10		1	None	SCG11V07	SCW11V07	SCW21V07	SCA21V07	SCA11V07
	25		2	None	SDG11V07	SDW11V07	SDW21V07	SDA21V07	SDA11V07
	50		3	None	SEG11V07	SEW11V07		SEA21V07	SEA11V07
	100		4	None	SFG11V07	SFW11V07		SFA21V07	SFA11V07
	200		5	None	SGG11V07	SGW11V07		SGA21V07	SGA11V07

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.
* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown on Page 31.

Fusible Disconnect Switch Type With Class R Fuse Clips — 100,000 AIC Rating★

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304)	NEMA Type 4X Watertight, Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Poly- Phase	Coil Voltage *	NEMA Size	Fuse Clip Size Amps	Type	Type	Type	With External Reset	Without External Reset
200 (208)	3	208-60	0	30	SBG32V08	SBW32V08	SBW42V08	SBA42V08	SBA32V08
	5		1	30	SCG32V08	SCW32V08	SCW42V08	SCA42V08	SCA32V08
	7½			60	SCG33V08	SCW33V08	SCW43V08	SCA43V08	SCA33V08
	10		2	60	SDG32V08	SDW32V08	SDW42V08	SDA42V08	SDA32V08
	20		3	100	SEG35V08	SEW35V08		SEA45V08	SEA35V08
	40		4	200	SFG35V08	SFW35V08		SFA45V08	SFA35V08
230 (240)	75	240-60 220-50	5	400	SGG35V08	SGW35V08		SGA45V08	SGA35V08
	3		0	30	SBG32V03	SBW32V03	SBW42V03	SBA42V03	SBA32V03
	5		1	30	SCG32V03	SCW32V03	SCW42V03	SCA42V03	SCA32V03
	7½			60	SCG33V03	SCW33V03	SCW43V03	SCA43V03	SCA33V03
	15		2	60	SDG32V03	SDW32V03	SDW42V03	SDA42V03	SDA32V03
	25		3	100	SEG35V03	SEW35V03		SEA45V03	SEA35V03
460 (480)	50	480-60 440-50	4	200	SFG35V03	SFW35V03		SFA45V03	SFA35V03
	100		5	400	SGG35V03	SGW35V03		SGA45V03	SGA35V03
	5		0	30	SBG33V06	SBW33V06	SBW43V06	SBA43V06	SBA33V06
	10		1	30	SCG34V06	SCW34V06	SCW44V06	SCA44V06	SCA34V06
	15		2	30	SDG36V06	SDW36V06	SDW46V06	SDA46V06	SDA36V06
	25			60	SDG34V06	SDW34V06	SDW44V06	SDA44V06	SDA34V06
575 (600)	50	600-60 550-50	3	100	SEG33V06	SEW33V06		SEA43V06	SEA33V06
	100		4	200	SFG33V06	SFW33V06		SFA43V06	SFA33V06
	200		5	400	SGG33V06	SGW33V06		SGA43V06	SGA33V06
	5		0	30	SBG33V07	SBW33V07	SBW43V07	SBA43V07	SBA33V07
	10		1	30	SCG34V07	SCW34V07	SCW44V07	SCA44V07	SCA34V07
	15		2	30	SDG36V07	SDW36V07	SDW46V07	SDA46V07	SDA36V07
575 (600)	25			60	SDG34V07	SDW34V07	SDW44V07	SDA44V07	SDA34V07
	50		3	100	SEG33V07	SEW33V07		SEA43V07	SEA33V07
	100		4	200	SFG33V07	SFW33V07		SFA43V07	SFA33V07
	200		5	400	SGG33V07	SGW33V07		SGA43V07	SGA33V07

★ For Class J fuse clips, use **Form Y91** (no additional charge).

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.
* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown on Page 31.



Reversing Combination Starters – NEMA Rated Class 8739 – MAG-GARD® Circuit Breaker

3-Pole Polyphase – 600 Volts AC Maximum – 50-60 Hz

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

Full-Voltage Type, Reversing with Melting Alloy Overload Relays

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)†	NEMA Type 4X Watertight Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 7 & 9★ For Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G		NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	HP Range Poly- phase	Coil Voltage *	NEMA Size	Circuit Breaker (See Page 1-48 for Breaker Adjustment Range)	Type	Type	Type	SPIN TOP® Type	Bolted Type	With External Reset Type	Without External Reset Type
200 (208)	¼-½ ½-1 1½-3	208-60	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41V08 SBG42V08 SBG43V08	SBW41V08 SBW42V08 SBW43V08	SBW51V08 SBW52V08 SBW53V08	SBR41V08 SBR42V08 SBR43V08	SBT41V08 SBT42V08 SBT43V08	SBA51V08 SBA52V08 SBA53V08	SBA41V08 SBA42V08 SBA43V08
	¼-½ ½-1 1½-3 5 7½		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04 GJL36050-M05	SCG41V08 SCG42V08 SCG43V08 SCG44V08 SCG45V08	SCW41V08 SCW42V08 SCW43V08 SCW44V08 SCW45V08	SCW51V08 SCW52V08 SCW53V08 SCW54V08 SCW55V08	SCR41V08 SCR42V08 SCR43V08 SCR44V08 SCR45V08	SCT41V08 SCT42V08 SCT43V08 SCT44V08 SCT45V08	SCA51V08 SCA52V08 SCA53V08 SCA54V08 SCA55V08	SCA41V08 SCA42V08 SCA43V08 SCA44V08 SCA45V08
	1½-3 5 7½-10		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41V08 SDG42V08 SDG43V08	SDW41V08 SDW42V08 SDW43V08	SDW51V08 SDW52V08 SDW53V08	SDR41V08 SDR42V08 SDR43V08	SDT41V08 SDT42V08 SDT43V08	SDA51V08 SDA52V08 SDA53V08	SDA41V08 SDA42V08 SDA43V08
	15-25		3	FAL36100-18M	SEG42V08	SEW42V08	SEW52V08		SET42V08	SEA52V08	SEA42V08
	30 40		4	KAL36250-25M KAL36250-26M	SFG42V08 SFG43V08	SFW42V08 SFW43V08	SFW52V08 SFW53V08		SFT42V08 SFT43V08	SFA52V08 SFA53V08	SFA42V08 SFA43V08
	50 60 75		5	KAL36250-30M LAL36400-32M LAL36400-33M	SGG42V08 SGG44V08 SGG45V08	SGW42V08 SGW44V08 SGW45V08				SGA52V08 SGA54V08 SGA55V08	SGA42V08 SGA44V08 SGA45V08
	100 125 150		6	LAL36400-36M MAL36600-40M MAL36600-42M	SHG43V08 SHG44V08 SHG45V08	SHW43V08 SHW44V08 SHW45V08				SHA53V08 SHA54V08 SHA55V08	SHA43V08 SHA44V08 SHA45V08
230 (240)	¼-½ ½-1 1½-3	240-60 220-50	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41V03 SBG42V03 SBG43V03	SBW41V03 SBW42V03 SBW43V03	SBW51V03 SBW52V03 SBW53V03	SBR41V03 SBR42V03 SBR43V03	SBT41V03 SBT42V03 SBT43V03	SBA51V03 SBA52V03 SBA53V03	SBA41V03 SBA42V03 SBA43V03
	¼-½ ½-1 1½-3 5-7½		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04	SCG41V03 SCG42V03 SCG43V03 SCG44V03	SCW41V03 SCW42V03 SCW43V03 SCW44V03	SCW51V03 SCW52V03 SCW53V03 SCW54V03	SCR41V03 SCR42V03 SCR43V03 SCR44V03	SCT41V03 SCT42V03 SCT43V03 SCT44V03	SCA51V03 SCA52V03 SCA53V03 SCA54V03	SCA41V03 SCA42V03 SCA43V03 SCA44V03
	1½-3 5-7½ 10 15		2	GJL36015-M03 GJL36030-M04 GJL36050-M05 FAL36100-18M	SDG41V03 SDG42V03 SDG43V03 SDG44V03	SDW41V03 SDW42V03 SDW43V03 SDW44V03	SDW51V03 SDW52V03 SDW53V03 SDW54V03	SDR41V03 SDR42V03 SDR43V03 SDR44V03	SDT41V03 SDT42V03 SDT43V03 SDT44V03	SDA51V03 SDA52V03 SDA53V03 SDA54V03	SDA41V03 SDA42V03 SDA43V03 SDA44V03
	15-30		3	FAL36100-18M	SEG42V03	SEW42V03	SEW52V03		SET42V03	SEA52V03	SEA42V03
	40 50		4	KAL36250-26M KAL36250-29M	SFG43V03 SFG44V03	SFW43V03 SFW44V03	SFW53V03 SFW54V03		SFT43V03 SFT44V03	SFA53V03 SFA54V03	SFA43V03 SFA44V03
	60 75 100		5	KAL36250-31M LAL36400-32M LAL36400-35M	SGG43V03 SGG44V03 SGG46V03	SGW43V03 SGW44V03 SGW46V03				SGA53V03 SGA54V03 SGA56V03	SGA43V03 SGA44V03 SGA46V03
	125- 150 200		6	MAL36600-40M MAL36600-44M	SHG44V03 SHG46V03	SHW44V03 SHW46V03				SHA54V03 SHA56V03	SHA44V03 SHA46V03

† NEMA Size 6 starters are NEMA Type 4 painted sheet steel enclosures.

★ NEMA Type 7 & 9 Bolted are not UL Listed.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes below.

Form Y534 may be used to substitute an FAL circuit breaker for a GJL circuit breaker (no additional charge).

Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24†▲	...	V01
120†	110	V02
208	...	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.

† These voltage codes must include **Form S** (supplied at No Charge).

Dimensions Page 28
Factory Modifications (Forms) Page 30
Type S Accessories (Class 9999) Catalog 9999CT9701



Reversing Combination Starters – NEMA Rated MAG-GARD® Circuit Breaker – Class 8739

3-Pole Polyphase – 600 Volts AC Maximum – 50-60 Hz

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

Full-Voltage Type, Reversing with Melting Alloy Overload Relays

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)†	NEMA Type 4X Watertight Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 7 & 9★ For Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G		NEMA Type 12/3RA Dusttight and Driptight Industrial Use Enclosure			
Motor Voltage (Starter Voltage)	HP Range Poly-phase	Coil Voltage *	NEMA Size	Circuit Breaker (See Page 1-48 for Breaker Adjustment Range)	Type	Type	Type	SPIN TOP® Type	Bolted Type	With External Reset Type	Without External Reset Type		
460 (480)	1/4-1 1/2-3 5	480-60 440-50	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41V06 SBG42V06 SBG43V06	SBW41V06 SBW42V06 SBW43V06	SBW51V06 SBW52V06 SBW53V06	SBR41V06 SBR42V06 SBR43V06	SBT41V06 SBT42V06 SBT43V06	SBA51V06 SBA52V06 SBA53V06	SBA41V06 SBA42V06 SBA43V06		
	1/4-1 1/2-3 5-7 1/2 10		1	GJL36003-M01 GJL36007-M02 GJL36015-M03 GJL36030-M04	SCG41V06 SCG42V06 SCG43V06 SCG44V06	SCW41V06 SCW42V06 SCW43V06 SCW44V06	SCW51V06 SCW52V06 SCW53V06 SCW54V06	SCR41V06 SCR42V06 SCR43V06 SCR44V06	SCT41V06 SCT42V06 SCT43V06 SCT44V06	SCA51V06 SCA52V06 SCA53V06 SCA54V06	SCA41V06 SCA42V06 SCA43V06 SCA44V06		
	5-7 1/2 10-15 20-25		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41V06 SDG42V06 SDG43V06	SDW41V06 SDW42V06 SDW43V06	SDW51V06 SDW52V06 SDW53V06	SDR41V06 SDR42V06 SDR43V06	SDT41V06 SDT42V06 SDT43V06	SDA51V06 SDA52V06 SDA53V06	SDA41V06 SDA42V06 SDA43V06		
	20-25 30-50		3	GJL36050-M05 FAL36100-18M	SEG41V06 SEG42V06	SEW41V06 SEW42V06	SEW51V06 SEW52V06		SET41V06 SET42V06	SEA51V06 SEA52V06	SEA41V06 SEA42V06		
	60-75 100		4	KAL36250-25M KAL36250-29M	SFG42V06 SFG44V06	SFW42V06 SFW44V06	SFW52V06 SFW54V06		SFT42V06 SFT44V06	SFA52V06 SFA54V06	SFA42V06 SFA44V06		
	125 150 200		5	KAL36250-31M LAL36400-32M LAL36400-35M	SGG43V06 SGG44V06 SGG46V06	SGW43V06 SGW44V06 SGW46V06				SGA53V06 SGA54V06 SGA56V06	SGA43V06 SGA44V06 SGA46V06		
	250 300 350 400		6	LAL36400-36M MAL36600-40M MAL36600-42M MAL36600-44M	SHG43V06 SHG44V06 SHG45V06 SHG46V06	SHW43V06 SHW44V06 SHW45V06 SHW46V06				SHA53V06 SHA54V06 SHA55V06 SHA56V06	SHA43V06 SHA44V06 SHA45V06 SHA46V06		
	575 (600)		1/4-1 1/2-3 5	600-60 550-50	0	GJL36003-M01 GJL36007-M02 GJL36015-M03	SBG41V07 SBG42V07 SBG43V07	SBW41V07 SBW42V07 SBW43V07	SBW51V07 SBW52V07 SBW53V07	SBR41V07 SBR42V07 SBR43V07	SBT41V07 SBT42V07 SBT43V07	SBA51V07 SBA52V07 SBA53V07	SBA41V07 SBA42V07 SBA43V07
			1/4-1 1/2-3 5-10		1	GJL36003-M01 GJL36007-M02 GJL36015-M03	SCG41V07 SCG42V07 SCG43V07	SCW41V07 SCW42V07 SCW43V07	SCW51V07 SCW52V07 SCW53V07	SCR41V07 SCR42V07 SCR43V07	SCT41V07 SCT42V07 SCT43V07	SCA51V07 SCA52V07 SCA53V07	SCA41V07 SCA42V07 SCA43V07
			5-10 15-20 25		2	GJL36015-M03 GJL36030-M04 GJL36050-M05	SDG41V07 SDG42V07 SDG43V07	SDW41V07 SDW42V07 SDW43V07	SDW51V07 SDW52V07 SDW53V07	SDR41V07 SDR42V07 SDR43V07	SDT41V07 SDT42V07 SDT43V07	SDA51V07 SDA52V07 SDA53V07	SDA41V07 SDA42V07 SDA43V07
			25-30 40-50		3	GJL36050-M05 FAL36100-18M	SEG41V07 SEG42V07	SEW41V07 SEW42V07	SEW51V07 SEW52V07		SET41V07 SET42V07	SEA51V07 SEA52V07	SEA41V07 SEA42V07
			60-100		4	KAL36250-25M	SFG42V07	SFW42V07	SFW52V07		SFT42V07	SFA52V07	SFA42V07
125 150 200		5	KAL36250-29M KAL36250-30M LAL36400-32M		SGG41V07 SGG42V07 SGG44V07	SGW41V07 SGW42V07 SGW44V07				SGA51V07 SGA52V07 SGA54V07	SGA41V07 SGA42V07 SGA44V07		
250 300 350-400		6	LAL36400-35M LAL36400-36M MAL36600-40M		SHG42V07 SHG43V07 SHG44V07	SHW42V07 SHW43V07 SHW44V07				SHA52V07 SHA53V07 SHA54V07	SHA42V07 SHA43V07 SHA44V07		

‡ NEMA Size 6 starters are NEMA Type 4 painted sheet steel enclosures.

★ NEMA Type 7 & 9 Bolted are not UL Listed.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes below.

Form Y534 may be used to substitute an FAL circuit breaker for a GJL circuit breaker (no additional charge).

Coil Voltage Codes

Voltage	Code
60 Hz	50 Hz
24†▲	110
120†	220
208	440
240	550
480	Specify
600	
Specify	

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, Form S (separate control) must be specified.

† These voltage codes must include Form S (supplied at No Charge).

DimensionsPage 28
Factory Modifications (Forms)Page 30
Type S Accessories (Class 9999)Catalog 9999CT9701



Reversing Combination Starters – NEMA Rated Class 8739 – Thermal Magnetic Circuit Breaker

3-Pole Polyphase – 600 Volts AC Maximum – 50-60 Hz

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

Full-Voltage Type, Reversing with Melting Alloy Overload Relays

Ratings					NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0-5)‡	NEMA Type 4X Watertight Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 7 & 9* For Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G			NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Poly- phase	Coil Voltage *	NEMA Size	Circuit Breaker		Type	Type	Type	SPIN TOP® Type	Bolted Type	With External Reset	Without External Reset
				Type	Ampere Rating						Type	Type
200 (208)	2 3	208-60	0	FAL♣	15 20	SBG1V08 SBG3V08	SBW1V08 SBW3V08	SBW11V08 SBW13V08	SBR1V08 SBR3V08	SBT1V08 SBT3V08	SBA11V08 SBA13V08	SBA1V08 SBA3V08
	5 7½		1	FAL♣	35 50	SCG5V08 SCG2V08	SCW5V08 SCW2V08	SCW15V08 SCW12V08	SCR5V08 SCR2V08	SCT5V08 SCT2V08	SCA15V08 SCA12V08	SCA5V08 SCA2V08
	10		2	FAL♣	60	SDG1V08	SDW1V08	SDW11V08	SDR1V08	SDT1V08	SDA11V08	SDA1V08
	15 20 25		3	FAL FAL KAL	90 100 110	SEG3V08 SEG1V08 SEG5V08	SEW3V08 SEW1V08 SEW5V08	SEW13V08 SEW11V08 SEW15V08		SET3V08 SET1V08 SET5V08	SEA13V08 SEA12V08 SEA15V08	SEA3V08 SEA1V08 SEA5V08
	30 40		4	KAL	125 200	SFG3V08 SFG4V08	SFW3V08 SFW4V08	SFW13V08 SFW14V08		SFT3V08 SFT4V08	SFA13V08 SFA14V08	SFA3V08 SFA4V08
	50 60 75		5	LAL	200 250 300	SGG6V08 SGG1V08 SGG4V08	SGW6V08 SGW1V08 SGW4V08				SGA16V08 SGA11V08 SGA14V08	SGA6V08 SGA1V08 SGA4V08
	100 125 150		6	MAL	450 600 600	SHG4V08 SHG3V08 SHG5V08	SHW4V08 SHW3V08 SHW5V08				SHA14V08 SHA13V08 SHA15V08	SHA4V08 SHA3V08 SHA5V08
230 (240)	2 3	240-60 220-50	0	FAL♣	15 20	SBG1V03 SBG3V03	SBW1V03 SBW3V03	SBW11V03 SBW13V03	SBR1V03 SBR3V03	SBT1V03 SBT3V03	SBA11V03 SBA13V03	SBA1V03 SBA3V03
	5 7½		1	FAL♣	30 45	SCG1V03 SCG6V03	SCW1V03 SCW6V03	SCW11V03 SCW16V03	SCR1V03 SCR6V03	SCT1V03 SCT6V03	SCA11V03 SCA16V03	SCA1V03 SCA6V03
	10 15		2	FAL♣	60 80	SDG1V03 SDG7V03	SDW1V03 SDW7V03	SDW11V03 SDW17V03	SDR1V03 SDR7V03	SDT1V03 SDT7V03	SDA11V03 SDA17V03	SDA1V03 SDA7V03
	20 25 30		3	FAL FAL KAL	90 100 110	SEG3V03 SEG1V03 SEG5V03	SEW3V03 SEW1V03 SEW5V03	SEW13V03 SEW11V03 SEW15V03		SET3V03 SET1V03 SET5V03	SEA13V03 SEA11V03 SEA15V03	SEA3V03 SEA1V03 SEA5V03
	40 50		4	KAL	150 200	SFG1V03 SFG4V03	SFW1V03 SFW4V03	SFW11V03 SFW14V03		SFT1V03 SFT4V03	SFA11V03 SFA14V03	SFA1V03 SFA4V03
	60 75 100		5	LAL LAL LAL	225 250 350	SGG3V03 SGG1V03 SGG2V03	SGW3V03 SGW1V03 SGW2V03				SGA13V03 SGA11V03 SGA12V03	SGA3V03 SGA1V03 SGA2V03
	125 150 200		6	MAL	450 600 800	SHG4V03 SHG3V03 SHG7V03	SHW4V03 SHW3V03 SHW7V03				SHA14V03 SHA13V03 SHA17V03	SHA4V03 SHA3V03 SHA7V03

† NEMA Size 6 starters are NEMA Type 4 painted sheet steel enclosures.

★ NEMA Type 7 & 9 Bolted are not UL Listed.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown below.

♦ Rated 250 volts max.

Coil Voltage Codes

Voltage	50 Hz	Code
60 Hz		
24†▲	...	V01
120†	110	V02
208	...	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.

† These voltage codes must include **Form S** (supplied at No Charge).

Dimensions	Page 28
Factory Modifications (Forms)	Page 30
Type S Accessories (Class 9999)	Catalog 9999CT9701



Reversing Combination Starters – NEMA Rated Thermal Magnetic Circuit Breaker – Class 8739

3-Pole Polyphase – 600 Volts AC Maximum – 50-60 Hz

Devices require 3 thermal units. See Catalog 9065CT9701 for selection information.

Full-Voltage Type, Reversing with Melting Alloy Overload Relays

Ratings						NEMA Type 1 General Purpose Enclosure	NEMA Type 4 & 4X Watertight and Dusttight Enclosure Stainless Steel (304) (Sizes 0 - 5)†	NEMA Type 4X Watertight Dusttight and Corrosion Resistant Polyester Enclosure	NEMA Type 7 & 9★ For Hazardous Locations Class I, Groups C & D Class II, Groups E, F & G		NEMA Type 12/3R▲ Dusttight and Driptight Industrial Use Enclosure	
Motor Voltage (Starter Voltage)	Max. HP Poly- phase	Coil Voltage *	NEMA Size	Circuit Breaker		Type	Type	Type	SPIN TOP® Type	Bolted Type	With External Reset	Without External Reset
				Type	Ampere Rating						Type	Type
460 (480)	5	480-60 440-50	0	FAL	15	SBG2V06	SBW2V06	SBW12V06	SBR2V06	SBT2V06	SBA12V06	SBA2V06
	7½		1	FAL	20	SCG3V06	SCW3V06	SCW13V06	SCR3V06	SCT3V06	SCA13V06	SCA3V06
	10				25	SCG7V06	SCW7V06	SCW17V06	SCR7V06	SCT7V06	SCA17V06	SCA7V06
	15		2	FAL	40	SDG3V06	SDW3V06	SDW13V06	SDR3V06	SDT3V06	SDA13V06	SDA3V06
	20				60	SDG4V06	SDW4V06	SDW14V06	SDR4V06	SDT4V06	SDA14V06	SDA4V06
	25				70	SDG5V06	SDW5V06	SDW15V06	SDR5V06	SDT5V06	SDA15V06	SDA5V06
	30		3	FAL	80	SEG6V06	SEW6V06	SEW16V06		SET6V06	SEA16V06	SEA6V06
	40				90	SEG3V06	SEW3V06	SEW13V06		SET3V06	SEA13V06	SEA3V06
	50				100	SEG1V06	SEW1V06	SEW11V06		SET1V06	SEA11V06	SEA1V06
	60		4	KAL	110	SFG5V06	SFW5V06	SFW15V06		SFT5V06	SFA15V06	SFA5V06
	75				125	SFG3V06	SFW3V06	SFW13V06		SFT3V06	SFA13V06	SFA3V06
	100				200	SFG4V06	SFW4V06	SFW14V06		SFT4V06	SFA14V06	SFA4V06
	125		5	LAL	225	SGG3V06	SGW3V06				SGA13V06	SGA3V06
	150				250	SGG1V06	SGW1V06				SGA11V06	SGA1V06
	200				350	SGG2V06	SGW2V06				SGA12V06	SGA2V06
	250		6	MAL	450	SHG4V06	SHW4V06				SHA14V06	SHA4V06
	300				600	SHG3V06	SHW3V06				SHA13V06	SHA3V06
	350				600	SHG5V06	SHW5V06				SHA15V06	SHA5V06
	400				800	SHG7V06	SHW7V06				SHA17V06	SHA7V06
575 (600)	5	600-60 550-50	0	FAL	15	SBG2V07	SBW2V07	SBW12V07	SBR2V07	SBT2V07	SBA12V07	SBA2V07
	7½		1	FAL	15	SCG8V07	SCW8V07	SCW18V07	SCR8V07	SCT8V07	SCA18V07	SCA8V07
	10				20	SCG3V07	SCW3V07	SCW13V07	SCR3V07	SCT3V07	SCA13V07	SCA3V07
	15		2	FAL	35	SDG8V07	SDW8V07	SDW18V07	SDR8V07	SDT8V07	SDA18V07	SDA8V07
	20				45	SDG9V07	SDW9V07	SDW19V07	SDR9V07	SDT9V07	SDA19V07	SDA9V07
	25				60	SDG4V07	SDW4V07	SDW14V07	SDR4V07	SDT4V07	SDA14V07	SDA4V07
	30		3	FAL	60	SEG4V07	SEW4V07	SEW14V07		SET4V07	SEA14V07	SEA4V07
	40				80	SEG6V07	SEW6V07	SEW16V07		SET6V07	SEA16V07	SEA6V07
	50				90	SEG3V07	SEW3V07	SEW13V07		SET3V07	SEA13V07	SEA3V07
	60		4	FAL	100	SFG6V07	SFW6V07	SFW16V07		SFT6V07	SFA16V07	SFA6V07
	75			KAL	110	SFG5V07	SFW5V07	SFW15V07		SFT5V07	SFA15V07	SFA5V07
	100			KAL	150	SFG1V07	SFW1V07	SFW11V07		SFT1V07	SFA11V07	SFA1V07
	125		5	LAL	200	SGG7V07	SGW7V07				SGA17V07	SGA7V07
	150				200	SGG6V07	SGW6V07				SGA16V07	SGA6V07
	200				250	SGG1V07	SGW1V07				SGA11V07	SGA1V07
	250		6	MAL	350	SHG6V07	SHW6V07				SHA16V07	SHA6V07
	300				400	SHG4V07	SHW4V07				SHA14V07	SHA4V07
	350				500	SHG2V07	SHW2V07				SHA12V07	SHA2V07
	400				600	SHG3V07	SHW3V07				SHA13V07	SHA3V07

‡ NEMA Size 6 starters are NEMA Type 4 painted sheet steel enclosures.

★ NEMA Type 7 & 9 Bolted are not UL Listed.

▲ NEMA Type 12 enclosures may be field modified for outdoor non-corrosive and non-service-entrance-rated applications; see Page 17 for more information.

* Coil voltage code must be specified to order this product. Refer to standard coil voltage codes listed in selection table above or additional standard voltage codes shown below.

Coil Voltage Codes

Voltage		Code
60 Hz	50 Hz	
24†▲	...	V01
120†	110	V02
208	...	V08
240	220	V03
480	440	V06
600	550	V07
Specify	Specify	V99

▲ 24V coils are not available on Sizes 4-7. On Sizes 00-3, where 24V coils are available, **Form S** (separate control) must be specified.

† These voltage codes must include **Form S** (supplied at No Charge).



Reversing Combination Starters — NEMA Rated

Application Data – Class 8738, 8739

Control Circuit Transformers

Space and drilling are provided in all combination starters, in NEMA Types 1, 4 & 4X stainless and 12 enclosures, for the field addition (or factory installation) of a Class 9070 transformer. For standard control transformer selection in reversing combination starters, see table below. For primary fusing of the control circuit, use of the Class 9999 Type SF4 fuse holder kit is suggested. This kit can be either panel mounted or side mounted on the Type S starter.

Transformer Selection

NEMA Size	Starter Type	Standard Capacity (Form F4T)	50 VA Additional Capacity (Form F4T10)	100 VA Additional Capacity (Form F4T11)	200 VA Additional Capacity (Form F4T12)
		Class 9070 Type	Class 9070 Type	Class 9070 Type	Class 9070 Type
0-2	SB-SD	T100	T300	T300	T300
3	SE	T150	T300	T300	T500
4	SF	T300	T500	T500	T500
5	SG	T300	T500	T500	T500
6	SH	E03S2 is standard	E03S2 and T50	E03S2 and T100	E03S2 and T200

Class 8738 Application Data

NEMA Size	Fuse Clip Type	Enclosure	Amps Interrupting Capability Rating (AIC)
0-3	Standard	Standard*	5,000
0-3	Class R	Standard*	100,000
4-5	Standard	Standard*	10,000
4-5	Class R	Standard*	100,000

* Standard enclosure includes: NEMA Types 1, 4 & 4X stainless, and 12/3R.

Class 8739 Application Data

MAG-GARD® Motor Circuit Protector Type			
NEMA Size	Voltage	Enclosure	Amps Interrupting Capability Rating (AIC)
0 & 1, 2 (GJL)	0 – 480	Standard*	100,000
0 & 1 (FAL)	0 – 480	Standard*	22,000
0, 1, 2, & 3 (GJL)	481 – 600	Standard*	10,000
0 & 1	481 – 600	Standard*	10,000
2 – 6	600	Standard*	22,000
Thermal Magnetic Circuit Breaker Type			
0-3	600	Standard*	5,000
4 & 5	600	Standard*	10,000
6	600	Standard*	18,000

* Standard enclosure includes: NEMA Types 1, 4 & 4X stainless, and 12.


Panel Layout Drawings

NEMA Type 1, 4 & 4X Stainless 6, 12


Class	NEMA Size	Dimensions in Inches							
		A	B	C	D	E	F	G	H
8738	0, 1	10¾	19	6.9	6½	7¼	3½	9	4
8739				6½	7.9				—
8738	2	12	24	7½	7.0	7¾	4¼	9½	6
8739				7	8.8				—
8738	3	15½	32½	9	7.7	15½	0	14	5½
8739				8¾	8½				—
8738	4	18	39	11½	20½	18	0	17	—
8739		15½	32½	9¼	10½	15	0	15	—
8738	5*	27	59	26	25.0	21	6	21	—
8739		27	58	KAL: 6.8 LAL: 9	KAL: 23 LAL: 24½	21	6	21	—
8739	6	32	82	LAL: 9 MAL: 12½	LAL: 26 MAL: 27½	22½	9½	36	—

* Size 5 combination starter does not contain a full size panel. No usable panel space is available.

Panel Layout

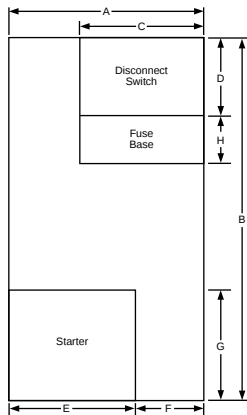

Class 8738

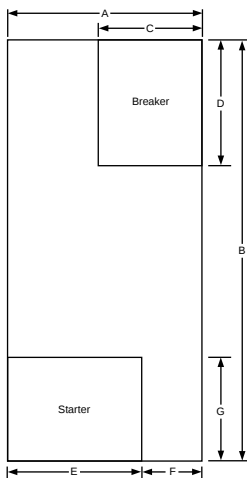

Class 8739



Reversing Combination Starters – NEMA Rated
Class 8738, 8739 – Approximate Dimensions

NEMA Type 1 Enclosure (Size 0 - 2)

NEMA Size	Class	Type	Dimensions (in inches)* – see Figure 1																Top & Bottom		Sides	Wt. (Lbs.)
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	W	X	Y	
0-1	8738 & 8739	SBG SCG	13 ³ / ₄	23	8 ¹ / ₂	10 ⁵ / ₈	21	18 ² / ₃₂	1 ⁷ / ₈	1 ⁷ / ₈	3 ³ / ₄	2 ⁵ / ₁₆	1 ¹ / ₁₆	3 ³ / ₄	2 ³ / ₁₆	1 ¹ / ₄	7 ⁷ / ₈	...	1 ¹ / ₂ -3 ¹ / ₄ -1	1 ¹ / ₂ -3 ¹ / ₄ -1	1 ¹ / ₂	49
2	8738 & 8739	SDG	15	28 ³ / ₄	9 ¹ / ₂	11 ⁵ / ₈	26 ¹ / ₄	21 ¹ / ₃₂	2 ³ / ₁₆	2	4	2 ⁹ / ₁₆	1 ¹ / ₄	3 ³ / ₄	2 ³ / ₁₆	1 ¹ / ₄	2 ⁹ / ₃₂	...	1-1 ¹ / ₄	1-1 ¹ / ₄	1 ¹ / ₂	80

NEMA Type 1 Enclosure (Size 3 - 6)

NEMA Size	Class	Type	Dimensions (in inches)* – see Figure 2																Top & Bottom		Sides	Wt. (Lbs.)
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	W	X	Y	
3	8738 & 8739	SEG	18 ¹ / ₂	44	10 ¹ / ₂	12 ¹ / ₂	3	25 ³ / ₃₂	43 ¹ / ₂	1 ¹ / ₄	...	2 ¹ / ₁₆	3 ¹ / ₂	5	2 ¹ / ₁₆	5 ³ / ₈	1 ⁷ / ₃₂	2 ⁹ / ₃₂	1-1 ¹ / ₄ 2-2 ¹ / ₄	1 ¹ / ₂ -3 ¹ / ₄	1 ¹ / ₂	245
4	8738	SFG	21	51 ¹ / ₂	10 ¹ / ₂	15	3	30 ² / ₃₂	51	1 ¹ / ₄	...	2 ¹ / ₁₆	3 ¹ / ₂	5	2 ¹ / ₁₆	5 ³ / ₈	1 ⁷ / ₃₂	2 ⁹ / ₃₂	2 ¹ / ₂	1 ¹ / ₂ -3 ¹ / ₄	1 ¹ / ₂	...
	8739	SFG	18 ¹ / ₂	44	10 ¹ / ₂	12 ¹ / ₂	3	25 ³ / ₃₂	43 ¹ / ₂	1 ¹ / ₄	...	2 ¹ / ₁₆	3 ¹ / ₂	5	2 ¹ / ₁₆	5 ³ / ₈	1 ⁷ / ₃₂	2 ⁹ / ₃₂	1-1 ¹ / ₄ 2-2 ¹ / ₄	1 ¹ / ₂ -3 ¹ / ₄	1 ¹ / ₂	...
5	8738	SGG	30	77	15 ¹ / ₂	22	4	39 ¹ / ₃₂	76	1 ¹ / ₂	...	3 ¹ / ₂	6 ⁹ / ₃₂	9 ¹ / ₄	3 ³ / ₁₆	...	...	...	1 ¹ / ₂ -3 ¹ / ₄ †	3	...	...
	8739	SGG	30	65	13 ² / ₃₂	22	4	39 ¹ / ₃₂	64	1 ¹ / ₂	...	3 ¹ / ₂	6 ⁹ / ₃₂	5	3 ³ / ₁₆	...	...	...	1 ¹ / ₂ -3 ¹ / ₄ †	3	...	...
6	8738 & 8739	SHG	36	90	17 ¹ / ₂	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...

NEMA Type 12 Enclosure

NEMA Size	Class	Type	Dimensions (in inches)* – see Figure 3										Wt. (Lbs.)
			A	B	C	D	E	F	G	H	I	J	
0-1	8738 & 8739	SBA SCA	13 ³ / ₄	10 ⁹ / ₃₂	24 ³ / ₄	3 ³ / ₄	2 ¹ / ₂	8 ³ / ₄	24	3 ³ / ₈	3 ³ / ₄	20 ⁹ / ₁₆	52
2	8738 & 8739	SDA	15	10 ³ / ₃₂	31	3 ¹ / ₄	3	9	30 ¹ / ₄	3 ³ / ₈	3 ³ / ₄	23 ¹ / ₁₆	95
3	8738 & 8739	SEA	18 ¹ / ₂	10 ¹ / ₂	45	5	3	12 ¹ / ₂	44	1 ¹ / ₂	3 ³ / ₄	25 ¹ / ₃₂	255
4	8738	SFA	21	10 ¹ / ₂	52 ¹ / ₂	5	3	15	51 ¹ / ₂	1 ¹ / ₂	3 ³ / ₄	30 ¹ / ₃₂	...
	8739	SFA	18 ¹ / ₂	10 ¹ / ₂	45	3 ³ / ₄	3	12 ¹ / ₂	44	1 ¹ / ₂	3 ³ / ₄	25 ¹ / ₃₂	...
5	8738	SGA	30	15 ¹ / ₂	78	9 ¹ / ₄	4	22	77	1 ¹ / ₂	7 ¹ / ₂	39 ¹ / ₃₂	...
	8739	SGA	30	15 ¹ / ₂	66	...	4	22	65	1 ¹ / ₂	7 ¹ / ₂	37 ¹ / ₈	...
6▲	8739	SHA	36	17 ¹ / ₂	90	...	...	...	...	...	...	...	...

▲ Size 6 enclosures are floor mounting.

NEMA Type 4X Polyester Enclosure

NEMA Size	Class	Dimensions (in inches)* – see Figure 4					
		Type	A	B	C	E	F
0-2	8738 & 8739	SBW SCW SDW	25.25	11.4	27.00	17.88	25.75
3-4	8739	SEW SFW	26.31	11.4	33.50	18.50	32.25

◆ See Page 12-69 for important information on hubs for NEMA Type 4X enclosures.
* The dimensions shown in all tables above are also for **Form F4T** (standard control transformer), **Form F4T11** (100 VA extra-capacity), and **Form F4T12** (200 VA extra-capacity).

NOTE: Illustrations may not represent the actual enclosure; they are intended for dimensional information only.

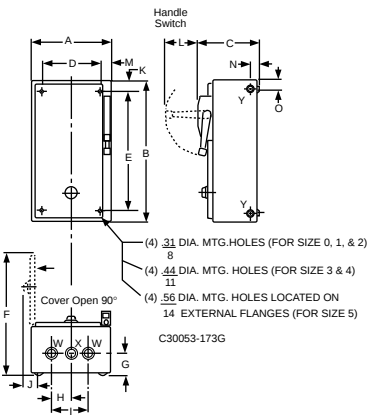


Figure 1:

NEMA Type 1 Enclosure (Sizes 0 - 2)

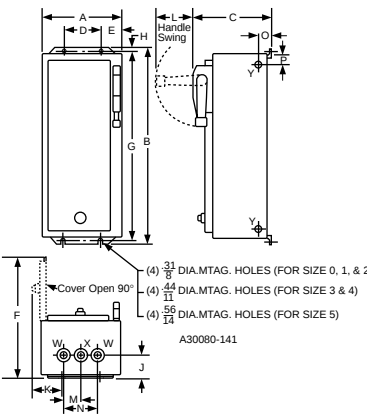


Figure 2:

NEMA Type 1 Enclosure (Sizes 3 - 6)

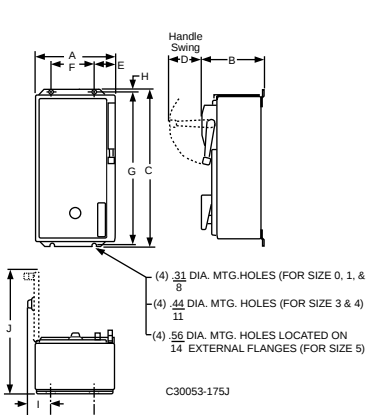


Figure 3:

NEMA Type 12 Enclosure

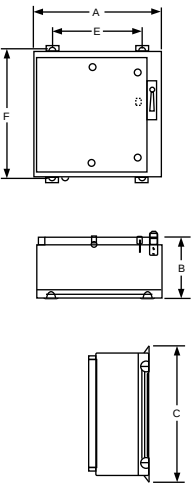


Figure 4:

NEMA Type 4X Polyester Enclosure



Reversing Combination Starters

Approximate Dimensions – Class 8738, 8739

NEMA Type 4 & 4X Stainless Enclosure

NEMA Size	Class	Type	Dimensions (in inches)* – see Figure 1													Bottom W	Top & Bot. X	Wt. (Lbs.)
			A	B	C	D	E	F	G	H	I	J	K	L				
0-1	8738 & 8739	SBW SCW	13¾	8½	25½	¾	2½	8¾	24	1⅜	3	1⅝	2⅝	18½	¾ Hub	1 Hub	52	
2	8738 & 8739	SDW	15	9½	30½	¾	2½	10	29¾	⅝	3	2	2⅝	21½	¾ Hub	1½ Hub	95	
3	8738 & 8739	SEW	18½	10½	45½	5	3	12½	44	1⅜	3½	2½	3⅝	25½	¾ Hub	2½ Hub	255	
4	8738	SFW	21	10½	52½	5	3	15	51½	1⅜	3½	2⅝	3⅝	30¼	¾ Hub	2½ Hub	...	
	8739	SFW	18½	10½	45½	5	3	12½	44	1⅜	3½	2⅝	3⅝	25½	¾ Hub	2½ Hub	...	
5	8738	SGW	30	15½	78½	9¼	4	22	77	⅞	6⅜	3	3½	39½	¾ Hub	3½ Hub	...	
	8739	SGW	30	13⅝	66½	5	4	22	65	⅞	6⅜	3	3½	37⅞	¾ Hub	3½ Hub	...	
6	8739	SHW	36	17½	98	...	...	...	...	...	...	...	...	...	...	...	...	

* Above dimensions also for **Form F4T** (standard control transformer), **Form F4T11** (100 VA extra capacity) and **Form F4T12** (200 VA extra capacity).

* Above dimensions also for Form F4T (standard control transformer), Form F4T11 (100 VA extra capacity) and Form F4T12 (200 VA extra capacity).

Class 8739 – NEMA Type 7 & 9 Bolted Enclosure*

NEMA Size	Type	Dimensions (in inches) – see Figure 2										Wt. (Lbs.)
		G	H	J	K	L	N	P	Q, R	S, T, U, V	Z	
0-1	SBT SCT	14¼	27⅝	9½	12¼	19¼	9⅞	11	2⅝	3⅞	1½	115
2	SDT	18⅝	31⅞	10	16¼	19¼	9⅞	12⅝	2⅝	3¾	2½	180
3-4	SET SFT	24½	45⅞	13¾	22½	27½	13¾	15⅝	3⅜	4	4	500

* Note: Enclosure has 3 door mounted Closing Plates.

Class 8739 - NEMA Type 7 & 9 SPIN TOP® Enclosure

NEMA Size	Type	Dimensions (in inches) – see Figure 3												Wt. (Lbs.)
		E	F	G	H	J	K	L	M	N	P	Q	R	
0-1	SBR, SCR	13 $\frac{7}{8}$	45 $\frac{1}{4}$	19 $\frac{1}{4}$	8	4 $\frac{3}{4}$	5 $\frac{1}{4}$	1 $\frac{1}{2}$	1 $\frac{1}{16}$	7	18	9 $\frac{5}{8}$	2 $\frac{3}{4}$	120
2	SDR	13 $\frac{3}{8}$	52 $\frac{1}{2}$	20 $\frac{1}{4}$	8	4 $\frac{3}{4}$	7 $\frac{1}{2}$	2 $\frac{1}{2}$	-	7 $\frac{3}{4}$	23	8 $\frac{5}{8}$	3	130

Information on Hubs

Hubs are supplied with each NEMA Type 4X combination starter as shown in the table below. Note that hubs are only installed in stainless steel enclosures; they are not installed in polyester enclosures.

NEMA Size	Quantity	Hub Size
0 & 1	1	0.75"
	2	1.00"
2	1	0.75"
	2	1.50"
3 & 4	1	0.75"
	2	2.50"

NOTE: Illustrations may not represent the actual enclosure; they are intended for dimensional information only.

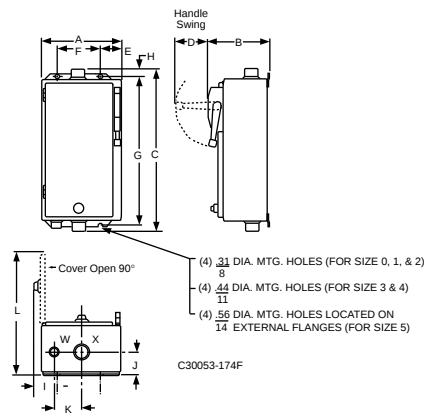


Figure 1:
NEMA Type 4 & 4X Stainless Enclosure

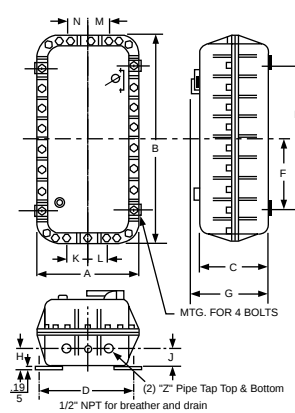


Figure 2:
NEMA Type 7 & 9 Bolted Enclosure

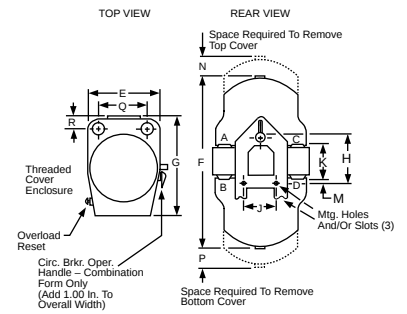


Figure 3:
NEMA Type 7 & 9 SPIN TOP® Enclosure

Factory Modifications (Forms) For Full Voltage Contactors and Starters

Factory installed modifications are available for the classes of control equipment listed in the respective tables. Prices shown are **additions** to standard equipment prices and are **not** to be used as separate selling prices. Kits are also available for many field modifications and normal parts replacement on most control items. Refer to Classes 9998 and 9999 for complete listings.

Standard equipment dimensions and enclosure construction may not apply when certain special features are added. Such cases should be referred to the factory with complete description when accurate dimensions are required. **Note:** If UL label is required, consult local Square D Field Sales Office. Some forms are **not** UL Listed.

Full Voltage Starters

	Factory Modifications	Enclosure Type	Form Letters
PILOT DEVICES IN COVER Full Voltage Non-Reversing Controllers Only Classes 8538 8539	Push Buttons ★		
	"Start-Stop"	1 3R, 4, 4X, 12 7 & 9	A A A
	"Start-Stop" (maintained contact)Ⓢ	1, 3R, 4, 4X■, 12	A16
	"Start-Stop" push button and "Hand-Off-Auto" selector switch	1, 3R, 4, 4X■, 12	AC
	"On-Off"	1 3R, 4, 4X■, 12	A3 A3
	Single Oiltight Pushbutton (specify marking)	1, 3R, 4, 4X■, 12	A11
	Selector Switches		
	"Hand-Off-Auto"	1 3R, 4, 4X, 12 7 & 9	C C C
	"On-Off"	1 3R, 4, 4X■, 12 7 & 9	C6 C6 C6
	Key Operated Selector Switch (specify marking and Key withdrawal position/code)	1, 3R, 4, 12	C33
	NON-STANDARD markings for Pilot Devices	1, 3R, 4, 12	G12▼
	Addition of padlock attachment to Class 9001 operators	1, 3R, 4, 12	G122
	Pilot Lights (specify color/type) ▲		
	Without Operating Interlock: Per light Per light Push-to-test (each)	1, 3R, 4, 4X, 12 7 & 9♦ 1, 3R, 4, 4X■, 12	P▲ P▲ P▲
	With Operating Interlock: Add price of each interlock per light	1, 3R, 4, 4X■, 12	X*
PILOT DEVICES IN COVER Full Voltage Reversing and Multi-Speed Controllers Only Classes 8738 8739	Push Buttons ★		
	"Forward-Reverse-Stop"	1, 4, 4X■, 12	A1
	"High-Low-Stop"	1, 4, 12	A2
	"Fast-Off-Slow"	1, 4, 12	A9
	"High-Low" push button and "Hand-Off-Auto" selector	1, 4, 12	A10C
	Single Oiltight Pushbutton (specify marking)	1, 4, 4X■, 12	A11
	Selector Switches		
	"Hand-Off-Auto"	1, 4, 4X■, 12 7 & 9	C C
	"On-Off"	1, 4, 4X■ 7 & 9	C6 C6
	"High-Off-Low"	1, 4, 12	C7
	"Forward-Off-Reverse"	1, 4, 4X■, 7, 9, 12	C14
	"High-Low" and "Hand-Off-Auto"	1, 4, 12	CC17
	"Slow-Fast"	1, 4, 4X■, 12	C19
	"Forward-Reverse"	1, 4, 4X■, 12	C20
	"High-Low-Off-Auto"	1, 4, 12	C25
	NON-STANDARD markings for Pilot Devices	Any	G12▼
	Pilot Lights (specify color/type)▲		
	One Pilot Light: one light with two electrical interlocks. Two Pilot Lights: each light is wired in parallel, no interlocks used		
	Without Operating Interlock: Per light Per light Push-to-test (each)	1, 4, 4X■, 12 7 & 9♦ 1, 4, 4X■, 12	P▲ P▲ P▲
	With Operating Interlock: Add price of each interlock per light	1, 4, 4X■, 12	X*

★ All push buttons are momentary contact unless specified otherwise.

■ This adder, used with a NEMA Type 4X enclosure, applies to Classes 8538, 8539, 8738, 8739.

▲ Indicate pilot light color as Form P1 (red) or Form P2 (green), etc. as shown in the table below. Unless otherwise requested, standard practice is to wire red pilot light to indicate device is energized. No additional auxiliary contact is required. Also, standard practice is to wire green pilot light to indicate device is de-energized. An additional normally-closed auxiliary contact is required. A wiring diagram must be supplied for other pilot light colors and/or arrangements.

♦ Pilot lights available at 120 to 600 volt only.

▼ Specify marking and/or Class 9001 Type KN or Type SKN legend plate required.

† Specify appropriate Class 9001 Type K or SK operator required.

* To determine the maximum number of auxiliary contacts which can be added to each Type S device and for the appropriate "X Form", refer to the tables in the Class 8736 section on Page 12-81 (for reversing or two-speed devices).

Standard Pilot Light Form	Push -to-Test Pilot Light Form	LED Pilot Light	Color
P1	P21	P51	Red
P2	P22	P52	Green
P3	P23	—	Amber
P4	P24	—	Clear
—	P25	P55	Yellow



Factory Modifications (Forms) For Full Voltage Contactors and Starters

Full Voltage Controllers Only

Classes 8538, 8539, 8738 and 8739

Factory Modifications		Enclosure Type	Form Letters
CONTROL CIRCUIT FULL VOLTAGE AND MULTI- SPEED CON- TROLLERS ONLY CLASSES 8538 8539 8738 8739	Separate Control Circuit — (specify voltage and frequency)	Any	S★
	Fused Control Circuit (without control transformer)		
	One fuse	1, 3R, 4, 4X, 12	F
	Two fuses	1, 3R, 4, 4X, 7, 9, 12	F4
	Control Circuit Transformers■		
	Standard capacity (50 or 60 Hz)		
	NOTE: All orders requesting Form FT will be supplied as Form F4T.		
	FUSES		
	Primary		
	2	0	1, 4, 4X, 12
	2	0	7 & 9
	1	1†	1, 4, 4X, 12
	2	1	1, 4, 4X, 12
	2	1	7 & 9
	1	2†	1, 4, 4X, 12
	2	2	1, 4, 4X, 12
	Additional Capacity (50 or 60 Hz)		
	Two fuses in primary		
	100 VA additional capacity	1, 4, 4X, 12	F4T11●
	100 VA additional capacity	7 & 9	F4T11●
	200 VA additional capacity	1, 4, 4X, 12	F4T12●
	Two fuses in primary and one fuse in secondary		
	100 VA additional capacity	1, 4, 4X, 12	FF4T11
	100 VA additional capacity	7 & 9	FF4T11
	200 VA additional capacity	1, 4, 4X, 12	FF4T12
	300 VA additional capacity	1, 4, 4X, 12	FF4T13
	400 VA additional capacity	1, 4, 4X, 12	FF4T14
	500 VA additional capacity	1, 4, 4X, 12	FF4T15
	Substitute non-standard single primary, and/or single secondary voltage rating on control transformer■	Any	T1▼
	Substitute dual-voltage magnet coil.	Any	Y5†

★ All combination style devices such as 8538, 8539, 8738, 8739, that use Form S should also use Form Y74 (auxiliary contact installed on disconnect switch) per NEC Article 430-74.

■ Table at right.

▲ Single primary voltage must be specified.

▼ Must be used with another form of F4T. (Ex. Standard capacity transformer required, 208-24V. Order as Form F4TT1, 208-24V.)

† Not available on Size 2 or Size 3 devices with 4 or 5 poles.

★ Not available on this Size. Select appropriate transformer with secondary fuse protection.

□ Not available with 24V secondary on Size 3. Select appropriate transformer with secondary fuse protection. See Table at right for 24V secondary restrictions.

○ Not available with 24V secondary. Select appropriate transformer with secondary fuse protection. See Table at right for 24V secondary restrictions.

‡ Single phase with one leg grounded or grounded B phase applications ONLY.

■ Selection of Control Circuit Transformers

The standard primary/secondary voltages for control circuit transformers are indicated in the following table.

AC-OPERATED DEVICES With Control Transformers	
Voltage	Code
60Hz (Primary-Secondary)	
120-12▲	V88
120-24▲	V89
208-120	V84
240-24▲	V82
240-120	V80
277-120	V85
480-24▲	V83
480-120	V81
480-240	V87
600-120	V86
Specify	V99
▲ 12V coils are not available on Sizes 3-7. 24V coils are not available on Sizes 4-7.	

To order, select the desired device with the appropriate transformer form designation. Then convert the previously selected voltage code (V__) to reflect the desired primary/secondary voltage for the transformer. The secondary voltage should equal the previously selected coil voltage of the device.

Example:

You have previously selected a Class 8536SDG1V02S. V02S means that you need a coil voltage of 120-60/110-50 wired for separate control. You would like to add form FF4T with the transformer voltages being 48 volt primary, 120 volt secondary with Solid State Overload Relay Protection Class 20 Trip Class (H20).

The new and complete class, type, voltage code and form number will be:

Class	Type	Voltage Code	Form*
8536	SDG1	V81	FF4TH20

* Form numbers should always be shown in alphabetical order.

Marine Control

Class	Factory Modification	Enclosure Type	Form
8538 8539 8738	Modification of standard device for use as marine control per UL508	12/3R 4/4X (S.S. only)	M10
8739	Modification of standard device for use as marine control like Form 10 standards in addition to IEEE45.	12/3R 4/4X (S.S. only)	M11



Factory Modifications (Forms) For Full Voltage Contactors and Starters

Full Voltage Controllers Only

CLASSES 8538, 8539, 8738 and 8739

Factory Modifications		Enclosure Type	Form Letters
OVERLOAD RELAYS	Non-Compensated Bimetallic Overload Relays		
	Single Phase:		
	Types SB-SD (Sizes 0-2)②	Any	B1
	Polyphase:		
	Two Element — For 2 Phase Only		
	Types SB-SD (Sizes 0-2)	Any	B1
	Three Element		
	Types SB-SD (Sizes 0-2)	Any	B2
	Types SE-SF (Sizes 3-4)	Any	B5
	Type SG (Size 5)	Any	B2Y500
	Type SH (Size 6)	Any	B2
	Ambient Compensated Bimetallic Overload Relays		
	Three Element		
	Types SB-SD (Sizes 0-2)	1, 4, 7, 9, 12	2B
	Types SE-SF (Sizes 3 & 4)	Any	Y59
	Type SG (Size 5)	Any	BY500
	Type SH (Size 6)	Any	B
	Overload Relays - General		
	Substitute Class 9065 SRSO100		
	For Standard Overload Protection	Any	B11
	Omit overload protection from combination starters. (Classes 8538, 8539, 8738, 8739 only)		
	Do not use with MAG-GARD® Circuit Breakers.		
	Deduct per starter	Any	Y76
	Modify Size 3 Type SE starters with melting alloy overload relays to accept Type FB quick trip or SB slow trip thermal units and Size 4 Type SF starters to accept Type FB quick trip thermal units. (Rejects Type CC standard trip thermal units.)	Any	Y81
	Substitute 9999 SO4 isolated alarm contact (N.O.) on melting alloy overload relay	Any	Y342
	Substitute 9999 SO5 isolated alarm contact (N.C.) on melting alloy overload relay	Any	Y344

① Size 7 uses a solid state overload relay as standard. See Class 8536 for complete details.

② Single phase bimetallic overload relays for Type S Sizes 0-2 require **two** (2) thermal units per starter.

③ For Classes 8736, 8738 and 8739, Type SG, consult Local Square D Field Office.

Solid State Overload Relay Factory Modifications (Forms)

The solid state overload relay is available on NEMA Size 00-7.

For Class 8536, 8538, 8539, 8736, 8738, 8739 and 8810 devices.

Form Description

Type S Starter with Motor Logic
Solid State Overload Relay

- 1 - Motor Logic, Base Unit, Trip Class 10
- 2 - Motor Logic, Base Unit, Trip Class 20
- 3 - Motor Logic, Feature Base Unit
- 0 - No additional modifications
- 1 - N.O. Aux. Contact (Field Convertible to N.C.)

Special Overload/Contactor Size Combinations (Base Unit & Feature Base Units):
(Must Be Specified On Size 00 Starter Orders)

Blank - Overload Matched to Starter Size (i.e. Size 1 contactor & 9-27A overload)

0 - A 6 - 18A overload on a starter size as indicated by the Starter Catalog Number

1 - A 9 - 27A overload on a starter size as indicated by the Starter Catalog Number

2 - A 15 - 45A overload on a starter size as indicated by the Starter Catalog Number

3 - A 30 - 90A overload on a starter size as indicated by the Starter Catalog Number

4 - A 45 - 135A overload on a starter size as indicated by the Starter Catalog Number

8 - A 1.5 - 4.5A overload on a starter size as indicated by the Starter Catalog Number (only offered on Feature Base Units)

9 - A 3 - 9A overload on a starter size as indicated by the Starter Catalog Number

SPECIAL NOTE FOR Class 8810 devices:
You MUST SPECIFY TWO SEPARATE FORM NUMBERS TO GET MOTOR LOGIC OVERLOADS ON TWO SPEED STARTERS. The first form number is for the low speed winding and the second is for the high speed winding.
EXAMPLE: Open Style, Size 4 Two Speed Starter with Motor Logic Overloads Required.
Single Winding, 460V, Constant Horsepower
High Speed FLA = 96A
Low Speed FLA = 27A (use Size 2 Overload)

Catalog Number to Order: 8810 SF01V02 form S H20 H202
Where: Form H20 is a Size 4 Contactor with a 45-135A Motor Logic Overload for the High Speed and form H202 is a 15-45A Motor Logic Overload on the low speed contactor.

Classes 8538, 8539, 8738 and 8739

Factory Modifications		Form
Motor Logic Solid State Overload	Base Unit, Trip Class 10	H10
	Base Unit, Trip Class 20	H20
	Feature Base Unit	H30
Motor Logic Solid State Overload with Auxiliary Contact	Base Unit, Trip Class 10	H11
	Base Unit, Trip Class 20	H21
	Feature Base Unit	H31

Special Starter Combinations with Motor Logic™ Overload Relay Protection

NEMA Contactor Size	Solid State Overload Relay Size							NEMA Contactor Size	Solid State Overload Relay Size						
	00B	00C	0	1	2	3	4		00B	00C	0	1	2	3	4
00	▲	Std.						2	▲	▲	▲	▲	Std.		
0	▲	▲	Std.					3	n/a	n/a	n/a	n/a	n/a	Std.	
1	▲	▲	▲	Std.				4	n/a	n/a	n/a	n/a	n/a	▲	Std.

▲ Possible factory starter combinations available.



Factory Modifications (Forms) For Full Voltage Contactors & Starters

Full Voltage Controllers Only

CLASSES 8538, 8539, 8738, 8739 and 8810			
Factory Modifications		Enclosure Type	Form Letters
POWER POLES	Addition of one NEMA Size 1, 30 Amp single pole N.O. unit	Any	Y428
	Addition of one NEMA Size 1, 30 Amp single pole N.C. unit	Any	Y429
	Addition of one NEMA Size 1, 30 Amp double pole N.O./N.O. unit	Any	Y430
	Addition of one NEMA Size 1, 30 Amp double pole N.C./N.C. unit	Any	Y434
	Addition of one NEMA Size 1, 30 Amp double pole N.O./N.C. unit	Any	Y435
	Addition of one NEMA Size 2 single pole N.O. unit	Any	Y436
	Addition of one NEMA Size 2 single pole N.C. unit	Any	Y437
	Addition of one NEMA Size 2 double pole N.O./N.O. unit	Any	Y438
	Addition of one NEMA Size 2 double pole N.C./N.C. unit	Any	Y439
	Addition of one NEMA Size 2 double pole N.O./N.C. unit	Any	Y440
MISCELLANEOUS	Coil transient suppressor (120 Volt only). Per Coil	Any	Y145
	Addition of terminal blocks (specify wired or unwired).		
	Wired, per terminal. Each	1, 4, 12	G50★
	Unwired, per terminal. Each	1, 4, 12	G50★

★ Addition of terminal block type 9080 CA or 9080 GR6 only. Number of circuits is same as ending of form number. (Ex.: G507 is 7 wire terminal block.)
 ■ When adding a power pole to a Size 2 device, it is necessary to also specify **Form Y118**.

MAG-GARD®

Circuit Breaker	Factory Modifications	Enclosure Type	Form Letters
8539 8739	Substitute FAL for GJL circuit breaker. (Note that the GJL breaker must be used with the SSOLR.)	1 4, 4X 12	Y534



Factory Modifications (Forms) For Full and Reduced Voltage Contactors & Starters

Full Voltage and Reduced Voltage Controllers*

CLASSES 8538, 8539, 8738 and 8739

Factory Modifications		Enclosure Type	Form Letters
Auxiliary Relays	Control relay (1 thru 4 poles) — specify pole arrangement, voltage and type required♦	1, 12 4, 4X*, 9	R17‡ R17‡
	Pneumatic Timing Relay — specify Class 9050 Type A or B, “On” or “Off” delay and wiring instructions.		
	0.2 Sec. to 1.0 Min.	1, 12 4, 4X*, 7, 9	K K
	1.0 Min. to 3.0 Min.	1, 12 4, 4X*, 7, 9	K16 K16
	Solid State Timing Relay (specify timing range) and timer (120V control req'd.)	1, 4, 4X, 7, 9, 12	K1
	Pneumatic Timing Attachment — 0.2 sec. to 1.0 min.		
	Addition of Class 9999 Type SK3 (off delay) attachment	1, 4, 4X*, 12	K36
	Addition of Class 9999 Type SK4 (on delay) attachment.	1, 4, 4X*, 12	K35
	Motor driven timing relay▼▼	1, 4, 12	K5
	Phase Failure and Reverse Phase Relay▼	1, 4, 12	Y444
	Undervoltage Relay▼	1, 4, 12	Y447
	Overvoltage Relay▼	1, 4, 12	Y448
Meters And Metering■	Under and Overvoltage Relay▼▲	1, 4, 12	Y449
	Ammeter in cover (includes current transformer if req'd.)	1, 12	G91
	Ammeter and switch with two current transformers	1, 12	G92
	Ammeter and switch with three current transformers	1, 12	G93
	Voltmeter mounted	1, 12	G94
	Voltmeter and switch mounted	1, 12	G95
	Elapsed time meter	1, 12	G97
	Operation counter	1, 12	G99
Auxiliary Contacts	Wattmeter	1, 12	G911
	Varmeter	1, 12	G913
	Power factor meter	1, 12	G914
	Additional starter (contactor) auxiliary contacts (Specify number of additional normally open or closed contacts required per contactor.) Each	Any	X†
Enclosures	Auxiliary contacts installed on disconnect switch or circuit breaker operating mechanism. SPDT	1, 4, 4X, 12	Y74
	DPDT	1, 4, 4X, 12	Y75
	(Note: Above contacts do not switch with automatic tripping of circuit breaker. If such operation is required, consult your local Square D field office.)		
	Space heater with N.C. auxiliary contact	1, 4, 4X, 12	G51
	Function identification plate, with marking as specified	Any	G11
	Convenience receptacle (2-wire) mounted in side of enclosure	1, 12	Y31
	Drain and breather installed	7 & 9	Y41
	Cover gaskets added to NEMA Type 1 enclosures:		
	For Classes 8538 and 8539	1	Y47
	For Classes 8738 and 8739	1	Y47
	For other full voltage controllers	1	Y47
	For reduced voltage controllers	1	Y47

♦ If controller has a control transformer, price that transformer with additional capacity for the relay provided.

* This adder, used with a NEMA Type 4X enclosure, applies only to Classes 8538, 8539, 8738, 8739 and 8810 non-reversing.

▼ Specify control and line voltage.

■ Motor HP and voltage required when placing order. Meters will be panel mounted in NEMA Type 12 enclosures.

† To determine the maximum number of auxiliary contacts which can be added to each Type S device and for the appropriate “X Form”, refer to the tables in the Class 8536 section on Page 12-29 (for non-reversing single-speed devices) or the Class 8736 section on Page 12-81 (for reversing or two-speed devices). For Class 8600 Reduced Voltage controllers, consult local Square D Field Office.

* Addition of control relay one (1) thru eight (8) poles. Number of poles is same as ending of form number. (Ex: R174 = 4 pole relay).

★ NEMA Type 7 & 9 enclosures not available with Class 8600 devices.

▲ For single phase applications only.

Selection of Control Circuit Transformers

The standard primary/secondary voltages for control circuit transformers are indicated in the following table.

Voltage	Code
60 Hz (Primary-Secondary)	
120-12	V88
120-24	V89
208-120	V84
240-24	V82
240-120	V80
277-120	V85
480-24	V83
480-120	V81
480-240	V87
600-120	V86
Specify	V99

To order, select the desired device with the appropriate transformer form designation. Then convert the previously selected voltage code (V__) to reflect the desired primary/secondary voltage for the transformer. The secondary voltage should equal the previously selected coil voltage of the device. (24Vac coils for NEMA Sizes 4-7 are not available).

Example:

You have previously selected a Class 8606SDG1V02S. V02S means that you need a coil voltage of 120-60/110-50 wired for separate control. You would like to add **Form FF4T** with the transformer voltages being 480 volt primary, 120 volt secondary.

The new and complete class, type, voltage code and form number will be:

Class	Type	Voltage Code	Form*
8606	SDG1	V81	FF4T

* Form numbers should always be shown in alphabetical order.



Combination Starters – NEMA Rated Class 8538, 8539, 8738 and 8739 – Accessories



An electrical interlock may also be factory installed in either a disconnect switch or circuit breaker combination starter. Specify **Form Y74** for single pole, or **Form Y75** for two pole interlocks. For pricing see factory modifications (FORMs).

INTERLOCKS AND CONTROL TRANSFORMERS

A one or two pole electrical interlock can be added to the disconnect switch or circuit breaker. Thus if a separate control circuit is used, the magnetic starter can be de-energized when the disconnect is switched to the OFF position. See Table 1 for proper interlock selection. For electrical ratings of disconnect and circuit breaker interlocks, see Table 2 below.

Table 1: Disconnect Switch and Breaker Interlocks

Class	Type	Class 9999	
		SPDT Type	DPDT Type
8538	SB†, SC†, SD† (Series B)	R6	R7
	SD (Series C)	R43	R44
	SB, SC (Series C)	R45	R46
	SE, SF (Series A)	R8	R9
	SE (Series B & C)	R41	R42
8538 & 8738	SF (Series B & C)	R39	R40
	SG	R35	R36
8539, 8739	SB, SC, SD, SE, SF, SG▲	R26	R27
8538	SBA, SCA, SBG, SCG (Series D)	TC11	TC21
8538	SBAS8, SCAS8, SBGS8, SCGS8 (Series D)	TC10	TC20
8738	SBAS8, SCAS8, SBGS8, SCGS8 (Series E)	TC10	TC20
8738	SBA, SCA, SBG, SCG (Series E)	TC11	TC21
8538	SDA, SDA†, SDG, SDG† (Series D)	TC10	TC20
8738	SDA, SDG (Series E)	TC10	TC20
8538, 8738	SEA, SEG (Series D)	TC10	TC20

▲ No interlocks available for the GJL circuit breaker.

† Class 8538 type numbers ending in suffix "S8".

Table 2: Disconnect Switch and Breaker Interlock Electrical Ratings

Class 9999 Type R6, 8, 26, 35, 39, 41, 43, 45, TC10, & TC11				Class 9999 Type R7, 9, 27, 36, 40, 42, 44, 46 & TC 20, 21					
AC – 50 or 60 Hz				AC – 50 or 60 Hz					
Volts	Maximum Current			Volts	Maximum Current				
	Make	Break	Continuous Carrying Current Amps		Make		Break		Continuous Carrying Current Amps
	Amps	Amps			Amps	VA	Amps	VA	
120	40	15	15	120	30	3450	3	345	10
240	20	10	15	240	15	3450	1.5	345	10
480	10	8	15	480	7.5	3450	.75	345	10
600	8	6	15	600	6	3450	.6	345	10

Table 3: Control Transformer Selection (8538 and 8539 only)

NEMA Size	Starter Type	Standard Capacity (Form F4T)	50 VA Additional Capacity (Form F4T10)	100 VA Additional Capacity (Form F4T11)	200 VA Additional Capacity (Form F4T12)
		Class 9070 Type	Class 9070 Type	Class 9070 Type	Class 9070 Type
0 & 1	SB & SC	T50	T100	T150	T300◆
2	SD	T100	T150	T300●	T300●
3	SE	T150	T150	T300	T500
4	SF	T300	T300	T500	T500
5	SG	T50 and 8501XO20	T100 and 8501XO20	T150 and 8501XO20	T300 and 8501XO20
6	SH	EO3S2 is standard	EO3S2 and T50	EO3S2 and T100	EO3S2 and T200
7	SJ	EO19S2 is standard	EO19S2 and T50	EO19S2 and T100	EO3S2 and T200

◆ Requires oversized enclosure. (Size 2 reversing enclosure.)

● Available in standard enclosure with MAG-GARD® circuit breaker and non-fusible disconnect switch. Requires oversized enclosure with thermal-magnetic circuit breakers and fusible disconnect switches. (Size 2 reversing enclosure.)

Transformer



File E61239
CCN XPTQ
Above 250 VA also
XPTQ7



File LR37055
Class 5411 06

Internal Auxiliary Switch – Circuit breakers can be supplied with a factory installed auxiliary switch for remote indication of an open and/or tripped or a closed breaker. One (specify **Form Y741**) or two (specify **Form Y751**) auxiliary switches can be supplied. The switches are supplied with normally open and normally closed circuits with a common connection. Contacts must be used on the same polarity and are rated 15 Amps at 240 volts AC. The auxiliary switches are located internally and are furnished with 19-20 inch long leads.

Alarm Switch – The alarm switch only operates when the breaker is tripped. It is used to actuate bell alarms and warning lights. The alarm switch is factory installed only (specify **Form Y742**) and consists of a single pole single throw switch which is normally open except when the breaker is tripped. The contacts are rated 4 Amps at 240 volts AC. This switch is located in the breaker and is supplied with 19-20 inch long leads.

Transformer Selection – Space and drilling are provided in all disconnect switch and circuit breaker combination starters in NEMA Type 1, 4 & 4X stainless and polyester, 12 and 7 & 9 bolted enclosures for the field addition (or factory installation) of a Class 9070 control circuit transformer and Class 9999 Type SFR4 fuse holder. This kit can be either panel mounted or side mounted on the Type S starter. For standard control transformer selection in combination starters, see Table 3. Consult field office for transformer additions to NEMA Type 7 & 9 SPIN-TOP® enclosures.

Fuse Block Mounting Brackets – The standard capacity transformer, Class 9070 Type T50, for the Size 0 and 1 starters mounts to the right of the magnetic starter.

Standards – Most combination starters and forms are UL Listed in file E152395, Category NKJH. Many combination starters have or are pending CSA Approval for File CR 584.



Square D Company
Highway 64 East
Knightdale, NC 27545 USA
(919) 266-3671

 is a Registered Trademark of Canadian Standards Association

 is a Registered Trademark of Underwriters Laboratories, Inc.

MOTORLOGIC is a Trademark of Square D Company.

MAG-GARD, SPIN TOP, Square D and  are Registered Trademarks of Square D Company.

Catalog No. 8538CT9701 1/98 © 1998 Square D All Rights Reserved.