


# Class 2510 Type K Motor Starting Switch

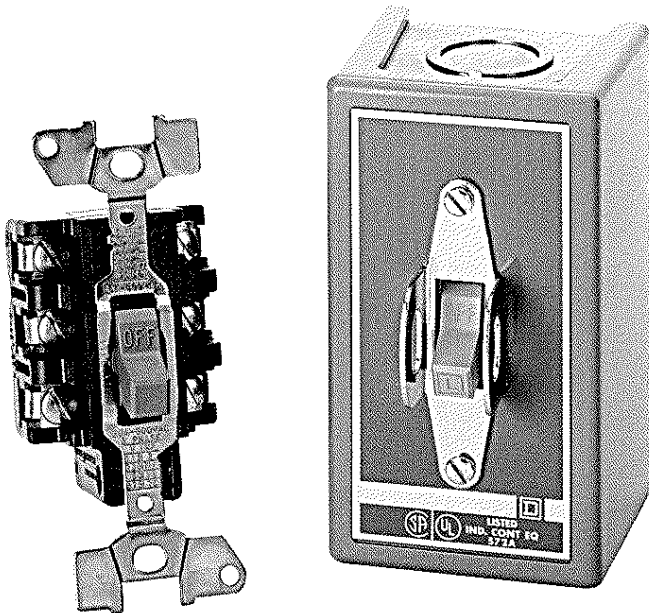

*Class 2510 Type K06 and KG6  
Motor Starting Switches*

**Increased horsepower and current ratings for Square D's Type K manual switch offer expanded application capability.**

As the market leader for manual switches, Square D is proud to announce the new Type K manual switch with higher horsepower and current ratings.

- Manufactured of thermoplastic material to accommodate higher rating
- Available in open style and NEMA Type I enclosures
- Optional red or green neon pilot lights — field or factory installed
- Handle guard, with lock off standard
- Screw-type terminals that accept #10 AWG or smaller copper wire

Class 2510 Type K standard manual switches offer the following:

- Enclosures for NEMA Type 1, 4, 7 and 9 applications
- Flush mounting plates in gray, standard stainless steel and jumbo stainless steel
- Variety of speeds:
  - non-reversing
  - reversing
  - two-speed units




**SQUARE D**  
GROUPE SCHNEIDER

# Fractional Horsepower Controls

The Square D family of manual devices, including the new higher rated Type K switches, provides a solution to all your motor applications. Class 2510 Type K motor starting switches provide manual on/off control of single or three-phase AC and DC motors. These devices have a continuous current rating of 30 amps.

**Type K Motor Starting Switch Horsepower Ratings**

Horsepower Ratings										
Device	No. of Poles	Motor Type AC	Maximum HP				DC Ratings			
			115 Volts	230 Volts	460 Volts	575 Volts	90 Volts	115 Volts	230 Volts	
Class 2510	K01, K03	2	Single Phase	2	2	3	3	1	2	1 1/2
	K02, K04	3	Three Phase	2	7.5	10	10	1	2	1 1/2
	K05	2	Single Phase	2	3	7.5	10	1	2	1 1/2
	K06	3	Three Phase	2	7.5	15	20	1	2	1 1/2
Class 2511	2	2	Single Phase	2	2	3	3	1	2	1 1/2
	3	3	Three Phase	2	7.5	10	10	1	2	1 1/2
Class 2512	2	2	Single Phase	2	2	3	3	1	2	1 1/2
	3	3	Three Phase Constant or Variable	2	7.5	10	10	1	2	1 1/2
	3	3	Three Phase Constant Horsepower	2	7.5	10	10	1	2	1 1/2

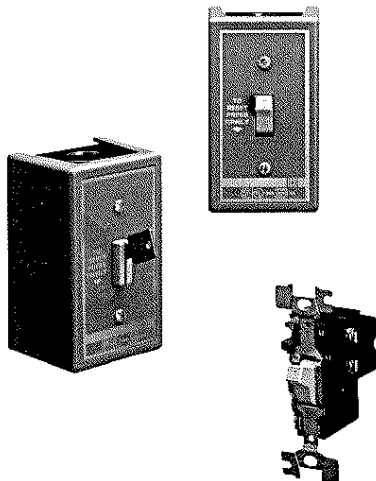

Type F fractional horsepower starters provide overload protection as well as manual on/off control for small motors. These devices are available in one and two pole versions with either toggle or key operators and have a continuous current rating of 16 amps.

Horsepower Ratings			
Volts	Maximum Horsepower		
	AC Single Phase		DC 2 Pole Only
	1 Pole	2 Pole	
115 - 230	1	1	3/4
277	1	1	—

Bulletin No. 2510HO9301  
September, 1993  
© 1993 Square D All Rights Reserved

Square D Company  
Industrial Control Business  
P.O. Box 27446  
Raleigh, NC 27611



**SQUARE D**  
GROUPE SCHNEIDER