## **SIEMENS**

Data sheet 3RF2330-1BA04



Solid-state contactor 1-phase 3RF2 AC 15 / 15 A / 40  $^{\circ}\text{C}$  48-460 V / 24 V DC screw terminal Instantaneous switching

product designation  design of the product  product type designation  manufacturer's article number  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _1 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered
product type designation  manufacturer's article number  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _5 of the accessories that can be ordered  product designation  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  load monitoring
manufacturer's article number  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _5 of the accessories that can be ordered  product designation  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  load monitoring
<ul> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_7 of the accessories that can be ordered</li> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> </ul>
<ul> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_7 of the accessories that can be ordered</li> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> </ul>
<ul> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_7 of the accessories that can be ordered</li> <li>_8 product designation</li> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> </ul>
<ul> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_3 are 12950-0GA16</li> <li>3 are 2920-0FA08</li> <li>4 terminal cover</li> <li>power regulator</li> <li>converter</li> <li>_4 of the accessories that can be ordered</li> <li>load monitoring</li> </ul>
<ul> <li>_5 of the accessories that can be ordered</li> <li>product designation</li> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_6 of the accessories that can be ordered</li> </ul>
product designation  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  load monitoring
<ul> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 ordered</li> <li>_6 ordered</li> <li>_7 ordered</li> <li>_8 ordered</li> <li>_9 ordered&lt;</li></ul>
<ul> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>load monitoring</li> </ul>
<ul> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>load monitoring</li> </ul>
• _4 of the accessories that can be ordered load monitoring
-
• _5 of the accessories that can be ordered load monitoring, basis
General technical data
product function instantaneous switching
power loss [W] for rated value of the current at AC in hot 33 W
operating state
• per pole 33 W
power loss [W] for rated value of the current without load current share typical 0.4 W
insulation voltage rated value 600 V
degree of pollution 3
type of voltage of the control supply voltage DC
surge voltage resistance of main circuit rated value 6 kV
shock resistance acc. to IEC 60068-2-27 15g / 11 ms
vibration resistance acc. to IEC 60068-2-6 2g
reference code acc. to IEC 81346-2
Substance Prohibitance (Date) 28.05.2009 00:00:00
Main circuit
number of poles for main current circuit 1
number of NO contacts for main contacts 1
number of NC contacts for main contacts 0
operating voltage at AC
• at 50 Hz rated value 48 460 V
• at 60 Hz rated value 48 460 V

operating frequency rated value	50 60 Hz
operating requestry rated value operating range relative to the operating voltage at AC	OO OO I IZ
• at 50 Hz	40 506 V
• at 60 Hz	40 506 V
	40 500 V
operational current	20. A
• at AC-51 rated value	30 A
• at AC-51 acc. to IEC 60947-4-3	22 A
acc. to UL 508 rated value	15 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I2t value maximum	1 800 A <sup>2</sup> ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
at DC rated value	30 V
• at DC	15 24 V
control supply voltage	
at DC initial value for signal <1> detection	15 V
at DC full-scale value for signal<0> recognition	5 V
control current at minimum control supply voltage	
• at DC	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts	
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions	0 0
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method • side-by-side mounting	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions  fastening method  • side-by-side mounting height width depth	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o o screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o o screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm screw-type terminals screw-type terminals
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions  fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)  1.5 6 mm² 1 10 mm²
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)  1.5 6 mm² 1 10 mm²
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts  Installation/ mounting/ dimensions  fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 100 mm 45 mm 139 mm  screw-type terminals screw-type terminals  2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)  1.5 6 mm² 1 10 mm²

a at ANAC applies for auxiliany and control contacts	1× (ANNC 20 12)
at AWG cables for auxiliary and control contacts	1x (AWG 20 12) 10 14
AWG number as coded connectable conductor cross section for main contacts	10 14
tightening torque	
for main contacts with screw-type terminals	2 2.5 N·m
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	0.5 0.6 N·m
terminals	
tightening torque [lbf·in]	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	18 22 lbf·in
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	4.5 5.3 lbf·in
terminals	
design of the thread of the connection screw	
• for main contacts	M4
of the auxiliary and control contacts	M3
stripped length of the cable	7
• for main contacts	7 mm
for auxiliary and control contacts	7 mm
Safety related data	
protection class IP on the front acc. to IEC 60529	IP20
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
<ul><li>during operation</li></ul>	-25 +60 °C
during storage	-55 +80 °C
Electromagnetic compatibility	
conducted interference	
<ul><li>due to burst acc. to IEC 61000-4-4</li></ul>	2 kV / 5 kHz behavior criterion 2
<ul> <li>due to conductor-earth surge acc. to IEC 61000-4-5</li> </ul>	2 kV behavior criterion 2
due to conductor-conductor surge acc. to IEC	1 kV behavior criterion 2
61000-4-5	440 dD. Win the formula of the control of the contro
<ul> <li>due to high-frequency radiation acc. to IEC 61000- 4-6</li> </ul>	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
field-based interference acc. to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions acc. to CISPR11	Class A for industrial environment
field-bound HF interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments
Short-circuit protection, design of the fuse link	
manufacturer's article number	
<ul> <li>of gS fuse for semiconductor protection at NH design usable</li> </ul>	3NE1803-0
<ul> <li>of full range R fuse link for semiconductor protection at cylindrical design usable</li> </ul>	<u>5SE1335</u>
<ul> <li>of back-up R fuse link for semiconductor protection at NH design usable</li> </ul>	<u>3NE8003-1</u>
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li> </ul>	3NC1032
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> </ul>	<u>3NC1450</u>
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul>	3NC2263
manufacturer's article number of the gG fuse	
at NH design usable	3NA6807; These fuses have a smaller rated current than the semiconductor relays
• at cylindrical design 14 x 51 mm usable	3NW6105-1; These fuses have a smaller rated current than the semiconductor relays
• at cylindrical design 22 x 58 mm usable	3NW6205-1; These fuses have a smaller rated current than the semiconductor relays
manufacturer's article number	
of DIAZED fuse usable	5SB2711: These fuses have a smaller rated current than the semiconductor relays

Certificates/ approvals

**General Product Approval** 

EMC

**Declaration of Conformity** 









**Miscellaneous** 



Test Certificates other Railway

Type Test Certificates/Test Report

Special Test Certificate

Confirmation

Vibration and Shock

## **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2330-1BA04

Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RF2330-1BA04}$ 


 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 


https://support.industry.siemens.com/cs/ww/en/ps/3RF2330-1BA04


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RF2330-1BA04&lang=en

3RF23301BA04 Page 4/6

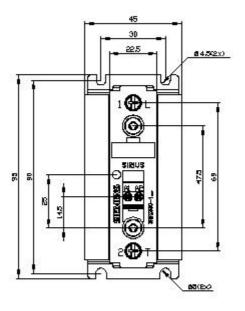

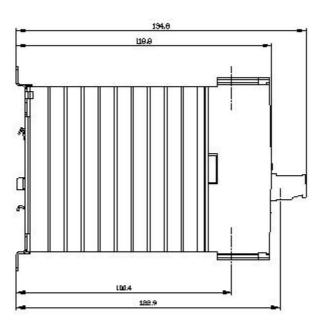

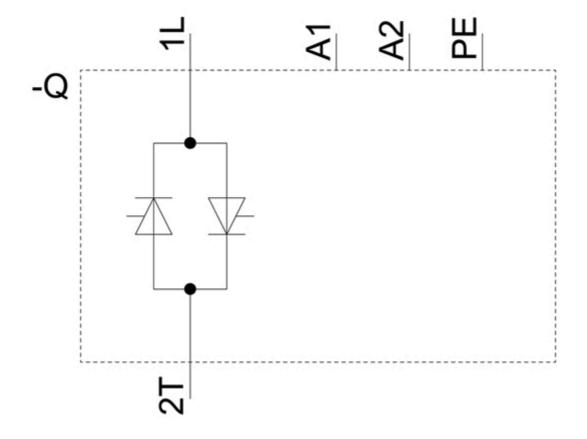

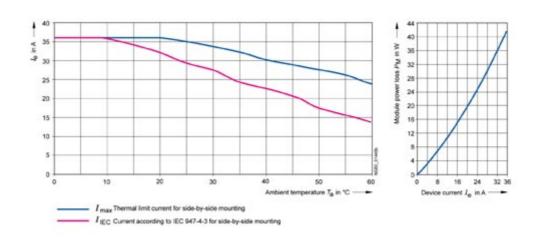

last modified: 5/6/2021 🖸