SIEMENS

Data sheet 3RP2525-1AW30



Timing relay, electronic on-delay 1 change-over contact, 7 time ranges 0.05 s...100 h 12-240 V AC/DC at 50/60 Hz AC with LED, screw terminal

product brand name	SIRIUS
product designation	timing relay
design of the product	slow-operating
product type designation	3RP25
General technical data	
product component	
relay output	Yes
semi-conductor output	No
product extension required remote control	No
product extension optional remote control	No
power loss [W] maximum	2 W
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
test voltage for isolation test	2.5 kV
degree of pollution	3
surge voltage resistance rated value	4 000 V
protection class IP	IP20
shock resistance according to IEC 60068-2-27	11g / 15 ms
vibration resistance according to IEC 60068-2-6	10 55 Hz / 0.35 mm
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
adjustable time	0.05 s 100 h
relative setting accuracy relating to full-scale value	5 %; +/-
thermal current	5 A
recovery time	250 ms
reference code according to IEC 81346-2	K
relative repeat accuracy	1 %; +/-
influence of the surrounding temperature	1% in the whole temperature range to the set runtime
power supply influence	1% in the whole voltage range to the set runtime
Substance Prohibitance (Date)	09/12/2014
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage 1 at AC	
● at 50 Hz	12 240 V
• at 60 Hz	12 240 V
control supply voltage frequency 1	50 60 Hz
control supply voltage 1	
• at DC	12 240 V
operating range factor control supply voltage rated value at DC	

Initial value Initi		
operating range factor control supply voltage rated value at AC at 50 44 Initial value		• initial value
AC at 9 Hz Initial value Initial v	1.1	
• full-scale value operating range factor control supply voltage rated value at Act 46 9 ft • initial value • full-scale value 1.1 Inrush current peak • all 24 V • all 240		
September Sept	0.8	initial value
AC at 69 faz Initial value 0.8 1.1 Inrush current peak 1.2	1.1	• full-scale value
• full-scale value inrush current peak • at 24 V • o 5 ms Switching function • ON-delay • ON-delay function • ON-delay function • one passing make contact • passing make contact • passing make contact • passing symmetrically with interval start instantaneous • (a FF delay No • flashing symmetrically with interval start instantaneous • flashing symmetrically with interval start • flashing symmetrically with pulse start • flashing asymmetrically with pulse start • flashing function • star-delta circuit with delay time • star-delta circuit with control signal • passing break contact • passing break contact • pulse delayed • pulse delayed • p		
March current peak	0.8	initial value
	1.1	full-scale value
• at 240 V 5 A duration of incursent peak • at 24 V • at 240 V • at 240 V • at 240 V • but 24		inrush current peak
e 12 42 V 0.3 ms 0.5 ms 5 Switching Function switching function • ON-delay	0.4 A	● at 24 V
and 24 V	5 A	● at 240 V
**at 240 V		duration of inrush current peak
switching function • ONt-delay • ON-delay finistantaneous contact • Dassing make contact • Dassing make contact • Dassing make contact • Description with pulse start/instantaneous • flashing symmetrically with interval start in No • flashing symmetrically with pulse start/instantaneous • flashing symmetrically with pulse start/instantaneous • flashing symmetrically with pulse start in No • flashing asymmetrically with pulse start in No • stard-deta circuit with delay time • passing break contact/instantaneous • No • pulse-shaping finistantaneous • No • pulse-shaping make contact in No •	0.3 ms	
switching function • ONt-delay/instantaneous contact • passing make contact • passing make contact/instantaneous contact • passing make contact/instantaneous contact • passing make contact/instantaneous contact • OFF delay switching function • flashing symmetrically with interval start/instantaneous • flashing symmetrically with pulse start/instantaneous • flashing symmetrically with pulse start/instantaneous • flashing symmetrically with pulse start on the start/instantaneous • flashing symmetrically with pulse start on the start/instantaneous • flashing asymmetrically with pulse start on the start of the st	0.5 ms	
ON-delay/instantaneous contact On-delay/instantaneous contact On-delay/instantaneous contact One passing make contact/instantaneous contact One passing make contact/instantaneous contact One Pedeav One Pedeav One Pedeav One		
ON-delay/instantaneous contact passing make contact/instantaneous contact passing make contact/instantaneous contact OFF delay No switching function flashing symmetrically with interval start/instantaneous lashing symmetrically with interval start No lashing symmetrically with pulse start No lashing asymmetrically with pulse start No switching function switching function other of the start delay circuit with delay time start-delta circuit No switching function with control signal diditive ON-delay passing break contact No passing break contact/instantaneous No OFF delay No OFF delay No OFF delayinstantaneous No pulse delayed/instantaneous No pulse delayed/instantaneous No pulse-shaping No pu		switching function
passing make contact No passing make contact/instantaneous contact por Fedeay switching function flashing symmetrically with interval start/instantaneous flashing symmetrically with pulse start flashing symmetrically with pulse start No flashing symmetrically with pulse start flashing symmetrically with pulse start flashing asymmetrically with control signal flashing symmetrically with pulse start flashing asymmetrically with pulse start flashing asymmetrically with control signal flashing asymmetrically with pulse start flashing asymmetrically with control signal flashing asymmetrically with control signal flashing function of interval relay with control signal flashing fl		•
passing make contact/instantaneous contact of Fe delay No of Fe delay No lashing symmetrically with interval start/instantaneous lashing symmetrically with interval start No lashing symmetrically with pulse start No lashing asymmetrically with pulse start No lashing function start-delta circuit with delay time lashing function of interval relay with control signal lashing function of interval relay with control signal lashing make contact No		•
OFF delay ON OFF delay OFF delay ON ON ON ON ON ON ON ON ON O		
### Starting function flashing symmetrically with interval start/instantaneous No flashing symmetrically with pulse start No flashing symmetrically with pulse start No flashing symmetrically with pulse start No flashing asymmetrically with pulse start No flashing symmetrically with pulse start No flashing asymmetrically with pulse start No flashing asymmetrically with pulse start No star-delta circuit with delay time No spassing break contact No passing break contact No passing preak contact No pulse delayed		
• flashing symmetrically with interval start in No • flashing symmetrically with pulse start/instantaneous • flashing symmetrically with pulse start in No • flashing asymmetrically with pulse start in No • start-delta circuit with delay time in Start-delta circuit with delay time in Start-delta circuit with delay time in Start-delta circuit in No • start-delta circuit in No • start-delta circuit in No • switching function with control signal • additive ON-delay • passing break contact • passing break contact • passing break contact/instantaneous • OFF delay instantaneous • pulse delayed • pulse delayed • pulse delayed • pulse-shaping • pulse-shaping/instantaneous • pulse-shaping/instantaneous • pulse-shaping/instantaneous • pulse-shaping instantaneous • pulse-shaping instantaneous • Additive ON-delay/instantaneous • Additive ON-delay/instantaneous • Pulse-shaping instantaneous • Pulse-shaping instantaneous • Pulse-shaping instantaneous • Additive ON-delay/instantaneous • Pulse-shaping instantaneous • Pulse-shaping instantan	No	
• flashing symmetrically with interval start • flashing symmetrically with pulse start/instantaneous • flashing asymmetrically with pulse start • star-delta circuit with delay time • star-delta circuit with delay time • star-delta circuit • No switching function with control signal • additive ON-delay • passing break contact • passing break contact No • passing break contact/instantaneous • OFF delay • OFF delay • OFF delay/instantaneous • pulse delayed/instantaneous • pulse shaping/instantaneous • pulse-shaping/instantaneous • pulse-shaping/instantaneous • pulse-shaping/instantaneous • ANO • ON-delay/OFF-delay/instantaneous • ANO • ON-delay/OFF-delay/instantaneous • ANO • Possing make contact • passing make contact • passing make contact • retrotriggerable with deactivated control signal • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal • retrograperable with switched-on control signal		_
flashing symmetrically with pulse start/ No flashing asymmetrically with pulse start No switching function star-delta circuit with delay time star-delta circuit with delay time star-delta circuit with control signal additive ON-delay passing break contact No passing break contact No OFF delay OFF delay OFF delay OFF delay OFF delay Orbediay/instantaneous pulse delayed pulse delayed pulse-shaping vo pulse-shaping vo ouditive ON-delay/instantaneous No pulse-shaping/instantaneous vo pulse-shaping/instantaneous vo pulse-shaping No pulse-shaping/instantaneous vo additive ON-delay/orf-delay/instantaneous vo vo endelay/OFF-delay/instantaneous vo vo endelay/OFF-delay/instantaneous vo vo endelay/OFF-delay/instantaneous vo vo endelay/orf-delay/instantaneous vo vo endelay/orf-delay/orf-delay/orf-delay/instantaneous vo vo endelay/orf-delay/orf-delay/instantaneous vo vo endelay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/orf-delay/		
• flashing symmetrically with pulse start • flashing asymmetrically with interval start • flashing asymmetrically with pulse start No switching function • star-delta circuit with delay time • star-delta circuit No switching function with control signal • additive ON-delay • passing break contact • passing break contact/instantaneous • OFF delay • OFF delay • OFF delay/instantaneous • pulse delayed/instantaneous • pulse delayed/instantaneous • pulse-shaping • pulse-shaping • pulse-shaping • pulse-shaping/instantaneous • additive ON-delay/OFF-delay/instantaneous • additive ON-delay/OFF-delay/instantaneous • passing make contact • passing make contact • passing make contact • pressing make contact • pressing make contact • retrotriggerable with switched-on control signal • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal • retrotriggerable with deactivated control signal • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal		
flashing asymmetrically with interval start flashing asymmetrically with pulse start No switching function		
• flashing asymmetrically with pulse start systrching function • star-delta circuit with delay time • star-delta circuit with delay time • star-delta circuit with control signal • additive ON-delay • passing break contact • passing break contact/instantaneous • OFF delay • OFF delay/instantaneous • pulse delayed • pulse delayed • pulse shaping • pulse-shaping • pulse-shaping • pulse-shaping/instantaneous • ON-delay/OFF-delay/instantaneous • DN-delay/OFF-delay/instantaneous • pulse-shaping with control signal • pulse-shaping make contact • peasing make contact • retrotriggerable with deactivated control signal • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal • retrotriggerable with switched-on control signal design of the fuse link for short-circuit protection of the auxiliary • switch required		
switching function • star-delta circuit with delay time • star-delta circuit No switching function with control signal • additive ON-delay • passing break contact • passing break contact/instantaneous • OFF delay • OFF delay/instantaneous • pulse delayed/instantaneous • pulse-shaping • pulse-shaping • pulse-shaping/instantaneous • No • pulse-shaping No • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal • retrotriggerable with switched-on control signal • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal • retrotriggerable with switched-on control signal • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal • retrotriggerable with switched-on control signal • retrotriggerable with switched-on control signal • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal • retrotriggerable with switched-on control signal • retrotriggerable with switched-on control signal • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control • retriggerable with switched-on control • retriggerable with switched-on control • retrotriggerable with switched-on contr		
star-delta circuit with delay time star-delta circuit switching function with control signal additive ON-delay passing break contact passing break contact/instantaneous OFF delay OFF delay OFF delay OFF delay/instantaneous pulse delayed pulse delayed pulse-shaping pulse-shaping/instantaneous additive ON-delay/instantaneous No additive ON-delay/instantaneous No passing make contact No switching function of interval relay with control signal retrotriggerable with deactivated control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retrotriggerable with switched-on control signal/instantaneous contact retrotriggerable with switched-on control signal/instantaneous contact retrotriggerable with switched-on control signal/instantaneous retrotriggerable with switched-on control signal/instantaneous retrotriggerable with deactivated control signal retrotriggerable with switched-on control signal/instantaneous retrotriggerable with switched-on control signal/instantaneous retrotriggerable with switched-on control signal/instantaneous retrotriggerable with switch	No	
• star-delta circuit switching function with control signal • additive ON-delay • passing break contact • passing break contact/instantaneous • OFF delay • OFF delay • pulse delayed • pulse delayed • pulse shaping • pulse-shaping • pulse-shaping/instantaneous • ON-delay/instantaneous • ON-delay/instantaneous • pulse-shaping No • pulse-shaping No • pulse-shaping/instantaneous • pulse-shaping/instantaneous • oN-delay/instantaneous • oN-delay/instantaneous • oN-delay/instantaneous • oN-delay/instantaneous • restrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal No • retrotrigerable with switched-on control signal	Nie	_
e additive ON-delay • passing break contact • passing break contact/instantaneous • OFF delay • OFF delay • OFF delay/instantaneous • pulse delayed • pulse-shaping • pulse-shaping/instantaneous • ON-delay/instantaneous • oNo • puse-shaping/instantaneous • pulse-shaping/instantaneous • pulse-shaping/instantaneous • pulse-shaping/instantaneous • additive ON-delay/instantaneous • ON-delay/OFF-delay/instantaneous • passing make contact • passing make contact • passing make contact/instantaneous contact • retrotriggerable with deactivated control signal • retrotriggerable with switched-on control signal		•
 additive ON-delay passing break contact No passing break contact/instantaneous No OFF delay No OFF delay/instantaneous No pulse delayed No pulse delayed/instantaneous No pulse-shaping No pulse-shaping/instantaneous No additive ON-delay/instantaneous No ON-delay/OFF-delay/instantaneous No passing make contact No passing make contact/instantaneous contact retrotriggerable with deactivated control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retriggerable with deactivated control signal retrotriggerable with deactivated control signal retrotriggerable with deactivated control signal No retrotriggerable with for short-circuit protection of the auxiliary switch required 	INO	
 passing break contact passing break contact/instantaneous No OFF delay No OFF delay/instantaneous No pulse delayed pulse delayed/instantaneous pulse-shaping No pulse-shaping/instantaneous No pulse-shaping/instantaneous No additive ON-delay/instantaneous No ON-delay/OFF-delay/instantaneous No passing make contact passing make contact/instantaneous contact retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal instantaneous contact retrotriggerable with switched-on control signal instantaneous contact retrotriggerable with deactivated control signal instantaneous contact retrotriggerable with switched-on control signal instantaneous contact<td>No</td><td></td>	No	
 passing break contact/instantaneous OFF delay OFF delay/instantaneous No pulse delayed No pulse delayed/instantaneous No pulse-shaping No pulse-shaping/instantaneous No pulse-shaping/instantaneous No additive ON-delay/instantaneous No ON-delay/OFF-delay/instantaneous No passing make contact passing make contact/instantaneous contact passing make contact/instantaneous contact retrotriggerable with deactivated control signal retrotriggerable with switched-on control signal (netroiriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal (netroiriggerable with switched-on control signal (netroiriggerable with switched-on control signal (netroiriggerable with deactivated (netroiriggerable with deactivated (netroiriggerabl		-
OFF delay OFF delay/instantaneous OFF delay/instantan		
OFF delay/instantaneous pulse delayed pulse delayed/instantaneous pulse-shaping pulse-shaping/instantaneous additive ON-delay/instantaneous ON-delay/OFF-delay/instantaneous ON-delay/OFF-delay/instantaneous passing make contact passing make contact/instantaneous contact passing make contact/instantaneous contact No switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with deactivated control signal retrotriggerable with deactivated control signal retrotriggerable with switched-on control signal retrotriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required		
 pulse delayed pulse delayed/instantaneous pulse-shaping No pulse-shaping/instantaneous No additive ON-delay/instantaneous ON-delay/OFF-delay/instantaneous No passing make contact passing make contact/instantaneous contact No passing make contact/instantaneous contact No switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal No retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A 		•
 pulse delayed/instantaneous pulse-shaping pulse-shaping/instantaneous No additive ON-delay/instantaneous ON-delay/OFF-delay/instantaneous No passing make contact passing make contact/instantaneous contact No switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with deactivated control signal No retrotriggerable with deactivated control signal No signal/instantaneous contact retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A 		-
 pulse-shaping pulse-shaping/instantaneous additive ON-delay/instantaneous No ON-delay/OFF-delay/instantaneous No passing make contact passing make contact/instantaneous contact No switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with deactivated control signal No retriggerable with deactivated control signal No signal/instantaneous contact retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A 		•
 pulse-shaping/instantaneous additive ON-delay/instantaneous ON-delay/OFF-delay/instantaneous No passing make contact passing make contact/instantaneous contact No switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal No signal/instantaneous contact retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A 		•
additive ON-delay/instantaneous ON-delay/OFF-delay/instantaneous passing make contact passing make contact passing make contact/instantaneous contact No switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required No fuse gL/gG: 4 A		
ON-delay/OFF-delay/instantaneous passing make contact passing make contact/instantaneous contact No switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal retrotriggerable with deactivated control signal retriggerable with switched-on control retriggerable with switched-on c		
 passing make contact passing make contact/instantaneous contact passing make contact/instantaneous contact switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		•
passing make contact/instantaneous contact switching function of interval relay with control signal retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required No fuse gL/gG: 4 A		•
switching function of interval relay with control signal • retrotriggerable with deactivated control signal/instantaneous contact • retrotriggerable with switched-on control signal No • retrotriggerable with switched-on control signal/instantaneous contact • retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		•
retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required No fuse gL/gG: 4 A		
 retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A	No	retrotriggerable with deactivated control
signal/instantaneous contact ● retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A	No	• retrotriggerable with switched-on control signal
• retriggerable with deactivated control signal No Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A	No	
Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		S .
design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A	No	
switch required		
Auxiliary circuit	fuse gL/gG: 4 A	switch required
material of switching contacts AgSnO2	AgSnO2	-
number of NC contacts		
• delayed switching 0		
• instantaneous contact 0	0	Instantaneous contact

number of NO contacts	
 delayed switching 	0
instantaneous contact	0
number of CO contacts	
 delayed switching 	1
instantaneous contact	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 250 V	3 A
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
● at 250 V	0.1 A
operating frequency with 3RT2 contactor maximum	5 000 1/h
contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5
	mA)
contact rating of auxiliary contacts according to UL	R300 / B300
switching capacity current with inductive load	0.01 3 A
Inputs/ Outputs	
product function	
 at the relay outputs switchover delayed/without delay 	No
• non-volatile	No
Electromagnetic compatibility	
EMC emitted interference according to IEC 61812-1	ambience A (industrial sector)
EMC immunity according to IEC 61812-1	corresponds to degree of severity 3
conducted interference	
 due to burst according to IEC 61000-4-4 	2 kV network connection / 1 kV control connection
• due to conductor-earth surge according to IEC 61000-4-5	2 kV
due to conductor-conductor surge according to IEC	1 kV
61000-4-5	
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge
Safety related data	
protection class IP on the front according to IEC 60529	IP20
type of insulation	Basic insulation
category according to EN 954-1	none
Connections/ Terminals	
product component removable terminal for auxiliary and	Yes
product component removable terminal for auxiliary and control circuit	Yes
control circuit type of electrical connection for auxiliary and control circuit	Yes screw-type terminals
control circuit	screw-type terminals
control circuit type of electrical connection for auxiliary and control circuit	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²)
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14)
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14)
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14)
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm²
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm²
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm²
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14 0.6 0.8 N·m
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14 0.6 0.8 N·m
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14 0.6 0.8 N·m
type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14 0.6 0.8 N·m M3
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14 0.6 0.8 N·m M3
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14 0.6 0.8 N·m M3 any screw and snap-on mounting onto 35 mm DIN rail
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14 0.6 0.8 N·m M3 any screw and snap-on mounting onto 35 mm DIN rail 100 mm
control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	screw-type terminals 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 1.5 mm²) 1x (20 12), 2x (20 14) 1x (20 12), 2x (20 14) 0.5 4 mm² 0.5 4 mm² 20 12 20 14 0.6 0.8 N·m M3 any screw and snap-on mounting onto 35 mm DIN rail 100 mm 17.5 mm

— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
 for grounded parts 		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— at the side	0 mm	
— downwards	0 mm	
for live parts		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
 during operation 	-25 +60 °C	
during storage	-40 +85 °C	
during transport	-40 +85 °C	
relative humidity during operation	10 95 %	
Certificates/ approvals		

sertificates, approvais

General Product Approval EMC





Confirmation







Declaration of Conformity

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report







Marine / Shipping

other







Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2525-1AW30

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2525-1AW30


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RP2525-1AW30

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2525-1AW30\&lang=en}}$

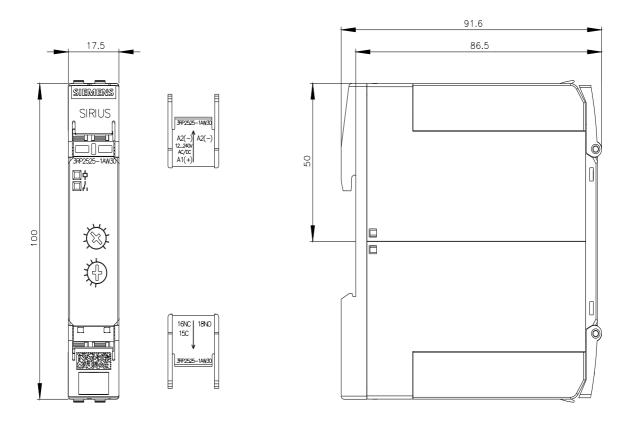

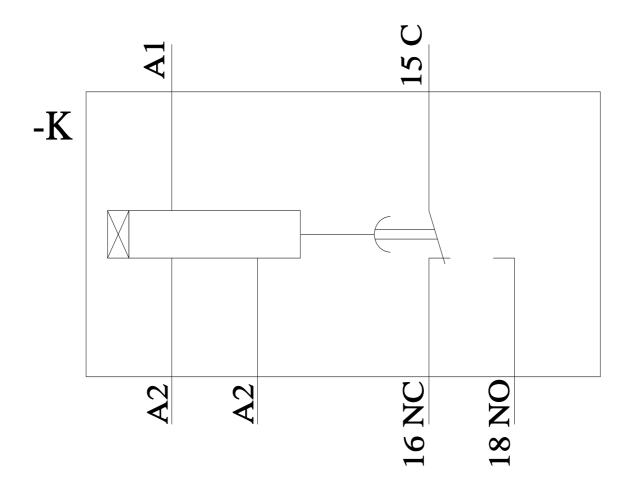

last modified: 11/21/2022 🖸