# TouchDown™

## Universal Pipe Clamp

For

# PowerBar™

## Universal Slider Brackets

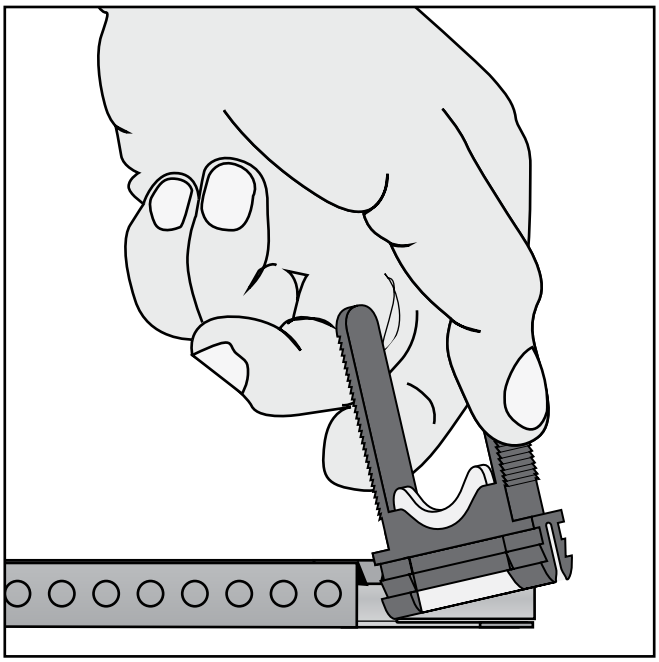

Slide TouchDown Clamp in sideways from end of bracket.




| TouchDown Specifications | | |
|---|---|---|
| Temp (°F) | Safe Working Load* | |
| | Black Nylon | E84 |
| –10 | 70 lbs. | 50 lbs. |
| 10 | | |
| 30 | | |
| 50 | | |
| 70 | | |
| 90 | | |
| 110 | | 35 lbs. |
| 130 | | 25 lbs. |
| 150 | 30 lbs. | |
| 170 | | |
| 190 | 12 lbs. | |
| 210 | | |
| 230 | NOT RECOMMENDED for ANY load | |
| Clamp capacity: ¼" O.D. – 1⅛" O.D. | | |
| Black nylon: V2 flame rating | | |
| E84: V0 flame rating | | |

*Safe working load = half failure load

Sioux Chief