WATER HAMMER ARRESTERS

650 SERIES

HydraRester™

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief 650 Series piston-type water hammer arresters shall be required in piping systems. Water hammer arresters shall have sufficient volume of air to dissipate the calculated kinetic energy generated in the piping system. Arresters shall be effective when installed at any angle. Arresters shall be approved for installation with no access panel required. Water hammer arresters shall be ANSI/ASSE 1010 2004 certified. Arresters shall be sized and placed per manufacturer's instructions.

INSTALLATION

May be installed at any angle. No access panels required. Compatible with Press Fittings or Push Fittings. Refer to instructions on product package, catalog or website.

MATERIALS

Arrester body: type L copper tube
Piston: poly piston with two EPDM o-rings
Male thread fitting: copper MIP thread
Piston lubrication: Dow-Corning, 111 FDA approved silicone compound
PEX F1960 fitting: No Lead EcoBrass 69300

CERTIFICATIONS/APPROVALS

Certified by ASSE to the ANSI/ASSE 1010-2004 standard

WORKING LIMITS*

Max working temperature: 250°
Max working pressure: 350 PSIG
Burst tested: to 2,900 PSIG

*PEX and CPVC connection specifications are limited to those called out in their respective ASTM Standards for Fittings (CPVC D2846, PEX F1807, PEX 1960).

652-A

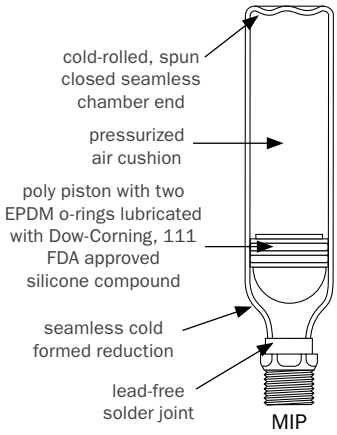

MIP

DIMENSIONS

Arrester size	A	B	C	D	E	F
Overall height						
Male thread	6½"	8¾"	11"	10⅛"	12⅝	15⅛"
Male sweat	8¼"	10"	12½"	11"	13½"	16"
CPVC	7½"	9½"	12"	—	—	—
PEX F1807	6½"	8¾"	11"	—	—	—
PEX F1960	6½"	8¾"	11"	—	—	—
Chamber width	1⅜"	1⅜"	1⅜"	2⅛"	2⅛"	2⅛"
Connection size	½"	¾"	1"	1"	1"	1"
Volume (cu. in.)	5	7	11	20	29	36
Fixture units	1–11	12–32	33–60	61–113	114–154	155–330

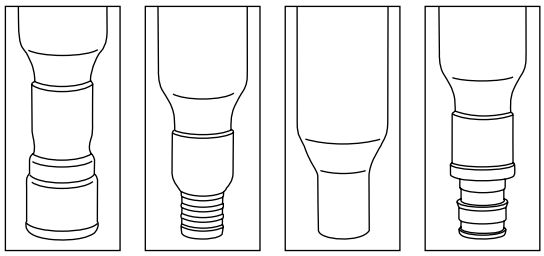

CPVC | PEX F1807 | Male Sweat | PEX F1960

PRESS-FIT COMPATIBLE | LEAD FREE COMPLIANT | ASSE 1010

Choose Item Number

- ☐ **652-A** = A size, MIP
- ☐ **653-B** = B size, MIP
- ☐ **654-C** = C size, MIP
- ☐ **655-D** = D size, MIP
- ☐ **656-E** = E size, MIP
- ☐ **657-F** = F size, MIP
- ☐ **652-AS** = Sweat/Press-Fit
- ☐ **653-BS** = Sweat/Press-Fit
- ☐ **654-CS** = Sweat/Press-Fit
- ☐ **655-DS** = Sweat/Press-Fit
- ☐ **656-ES** = Sweat/Press-Fit
- ☐ **657-FS** = Sweat/Press-Fit
- ☐ **652-AX** = A size, PEX 1807
- ☐ **653-BX** = B size, PEX 1807
- ☐ **654-CX** = C size, PEX 1807
- ☐ **652-AWG** = A size, PEX 1960
- ☐ **653-BWG** = B size, PEX 1960
- ☐ **654-CWG** = C size, PEX 1960
- ☐ **652-AC** = A size, CPVC socket
- ☐ **653-BC** = B size, CPVC socket
- ☐ **654-CC** = C size, CPVC socket