WATER HAMMER ARRESTER

660-HB

MiniRester™

ITEM # SUBMITTED **660-HB**

JOB NAME _____

LOCATION _____

ENGINEER _____

CONTRACTOR _____

PO# _____ TAG _____

SPECIFICATION

Sioux Chief 660-HB piston-type water hammer arresters shall be installed where required on washing machine valves. Water hammer arresters shall be specifically sized and have sufficient volume of air to dissipate the calculated kinetic energy generated by closing residential washing machine valves. Arresters shall be installed on both hot and cold supply inlets of washing machine valves. Arresters shall be approved for installation with no access panel required.

MATERIALS

Arrester body: 304 stainless steel
Piston: polypropylene with two EPDM o-rings
Tee body: UNS C36000 machined brass

WORKING LIMITS

Max working temperature: 250°F
Max working pressure: 250 PSIG
Burst tested: to 1,500 PSIG

CONNECTION

Trunk: ¾" male hose thread
Branch: ¾" female hose thread

CERTIFICATIONS/APPROVALS

Certified by ASSE to the ANSI/ASSE 1010-2004 standard, AA size
cUPC listed to UPC and Canadian codes and standards

DIMENSIONS

A:	overall height	5"
B:	top to branch center	4"
C:	center to branch end	3"

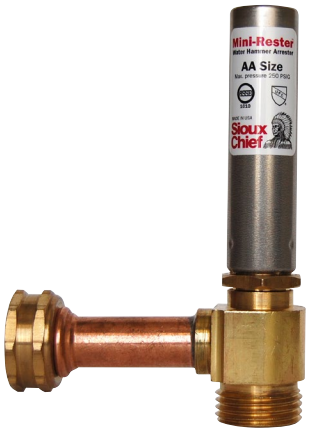

660-HB

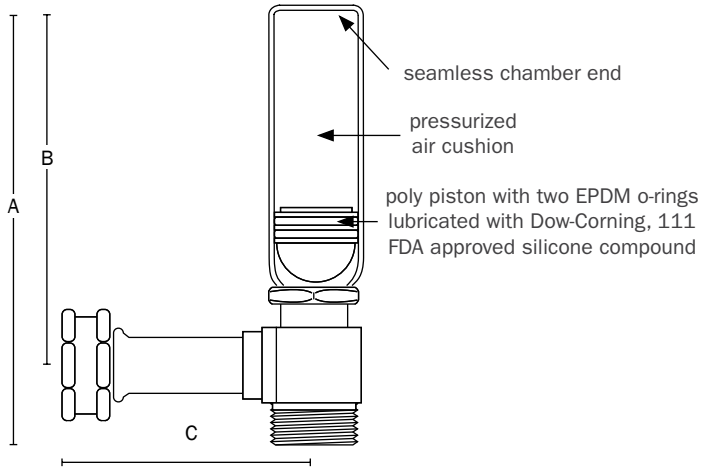

ASSE 1010 cUPC

Item Number

660-HB