TRAP PRIMER SPLITTER

695-Y/695-D SERIES

PrimePerfect™

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief 695 series trap primer splitters shall be installed where necessary in plumbing systems for distribution of water from trap primers. Splitters shall allow multiple drains to be primed per trap primer device. Splitters shall connect to trap primer tailpiece below the vacuum breaker.

MATERIALS

Wye Splitter body: brass, copper, no-lead solder
Wye Splitter branches: brass
Distributor body: brass, copper, no-lead solder
Distributor branches: copper
Distributor branch plug: ABS

INSTALLATION

Replenishes water in floor drain traps to prevent escape of sewer gas. The number of traps serviced by any trap primer is a function of activation frequency and evaporation rate and should be determined by the design engineer and/or the installing contractor. Install Sioux Chief splitter and distributors using PTFE tape. Assure splitter/distributor and trap primer are in plumb vertical alignment to assure equal distribution to each trap being serviced. Assure any unused outlets are plugged. Assure all joints and connections are leak-free. Install splitters in an accessible location. Assure distribution lines are free of kinks and are in fluid communication with trap after installation.

695-D4325

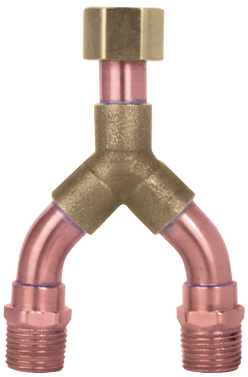

695-Y52

DIMENSIONS

A:	Overall Wye width	2⅜"
B:	Overall Wye height	4¾"
C:	Distributor height	7⅜"
D:	Captured nut	½" FIP

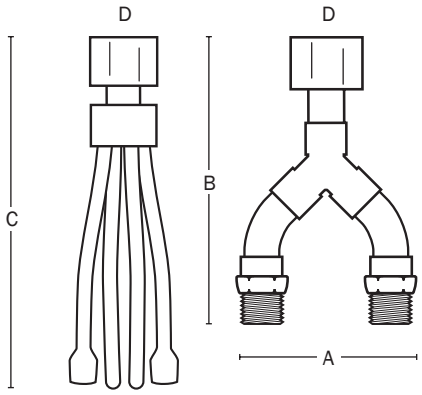

Create Item Number

695-A

e.g. 695-Y52: Trap Primer Wye Splitter

CONNECTION TYPE A

- ☐ **Y52** = ½" FIP swivel x (2) ½" MIP outlets
- ☐ **D20** = (2) ¼" M. Swt branches
- ☐ **D30** = (3) ¼" M. Swt branches
- ☐ **D40** = (4) ¼" M. Swt branches
- ☐ **D432** = (2) ¼" M. Swt branches & (2) spin-closed branches
- ☐ **D432F** = (4) ½" FIP branches w/ (2) poly plugs
- ☐ **D4325** = (2) ½" F. Swt branches & (2) spin-closed branches