Ox Box™

Lavatory Outlet Box

Fast
Installs quickly with supply lines from above or below.

Standardized
One product for consistent and repeatable looks and layout.

Fixed Cost
Easy ordering, costing and billing.

Strong
Compact ABS material. Bracket included.

Recessed
Valves are protected from job site abuse.

Installation Comparison

Traditional Installation

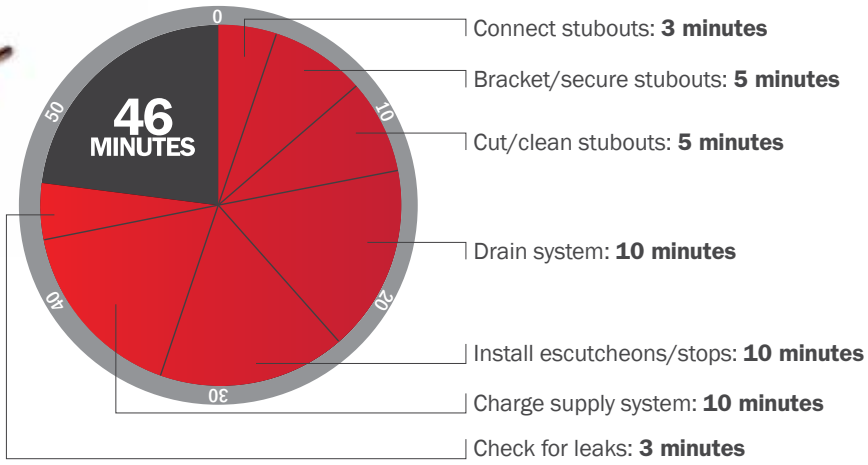

Materials

Two Stub Outs	$_____
Two Supply Stop Valves	$_____
Escutcheons	$_____
Bracketing Solution	$_____

Note: Time estimates assume all tools & materials are readily available.

VS.

Lav Box Installation

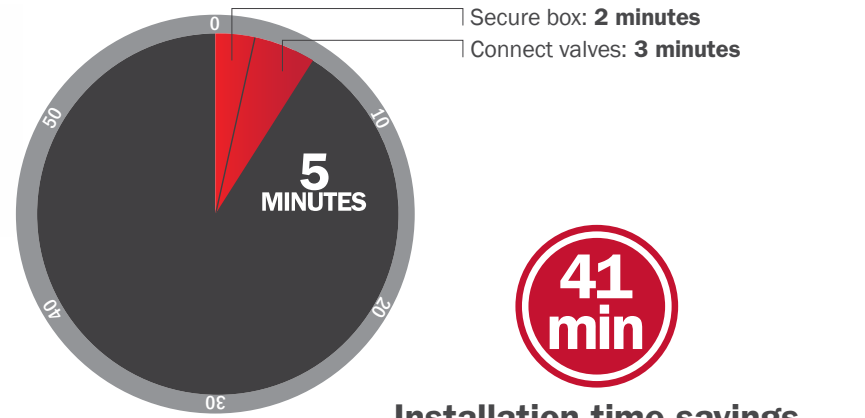

Materials

Sioux Chief Lav Box $_____

41 min

Installation time savings

Features & Benefits

Simple

One product, one frame. Easy sourcing, planning, costing and bidding.

Fast

Eliminates multiple touches. Eliminates the system drain-down, recharging and leak detection steps.

Savings

Material savings and labor savings transition variable costs into a known and reduced fixed cost.

Consistent

Standardized finish and valve layout every time. Every installation will look the same.

Strong

The box acts as the bracket. Added support bar protects the box during the drywall installation.

Quality

High quality valves and materials including highly durable ABS. Brass alloy is no lead, dezincification-resistant and stress-corrosion cracking-resistant.

Aesthetically Pleasing

High quality finish with beveled and contoured frame that can be painted or wall papered.

Liability vs. Warranty

Reduced chance for leak. Typical joints that are made during the finish phase are replaced by a warranteed product.

OxBox System

All OxBox products have one frame size.

Maintenance

Valve seats can be replaced if fouled by debris.

Made in USA

The OxBox is made in the USA from top quality materials, including no lead valves.

Rough-In Install

Boxes eliminate valve installation at finish, reducing the chance for leak.

Installation Options

Installs on or between studs

Installs with supply from above or below

"The consistent and repeatable installations and look of the OxBox Lav Box was enticing. Its comparative time and material cost savings over traditional installations just makes sense."

Tim Fortin
John W Danforth Co
Tonawanda, NY

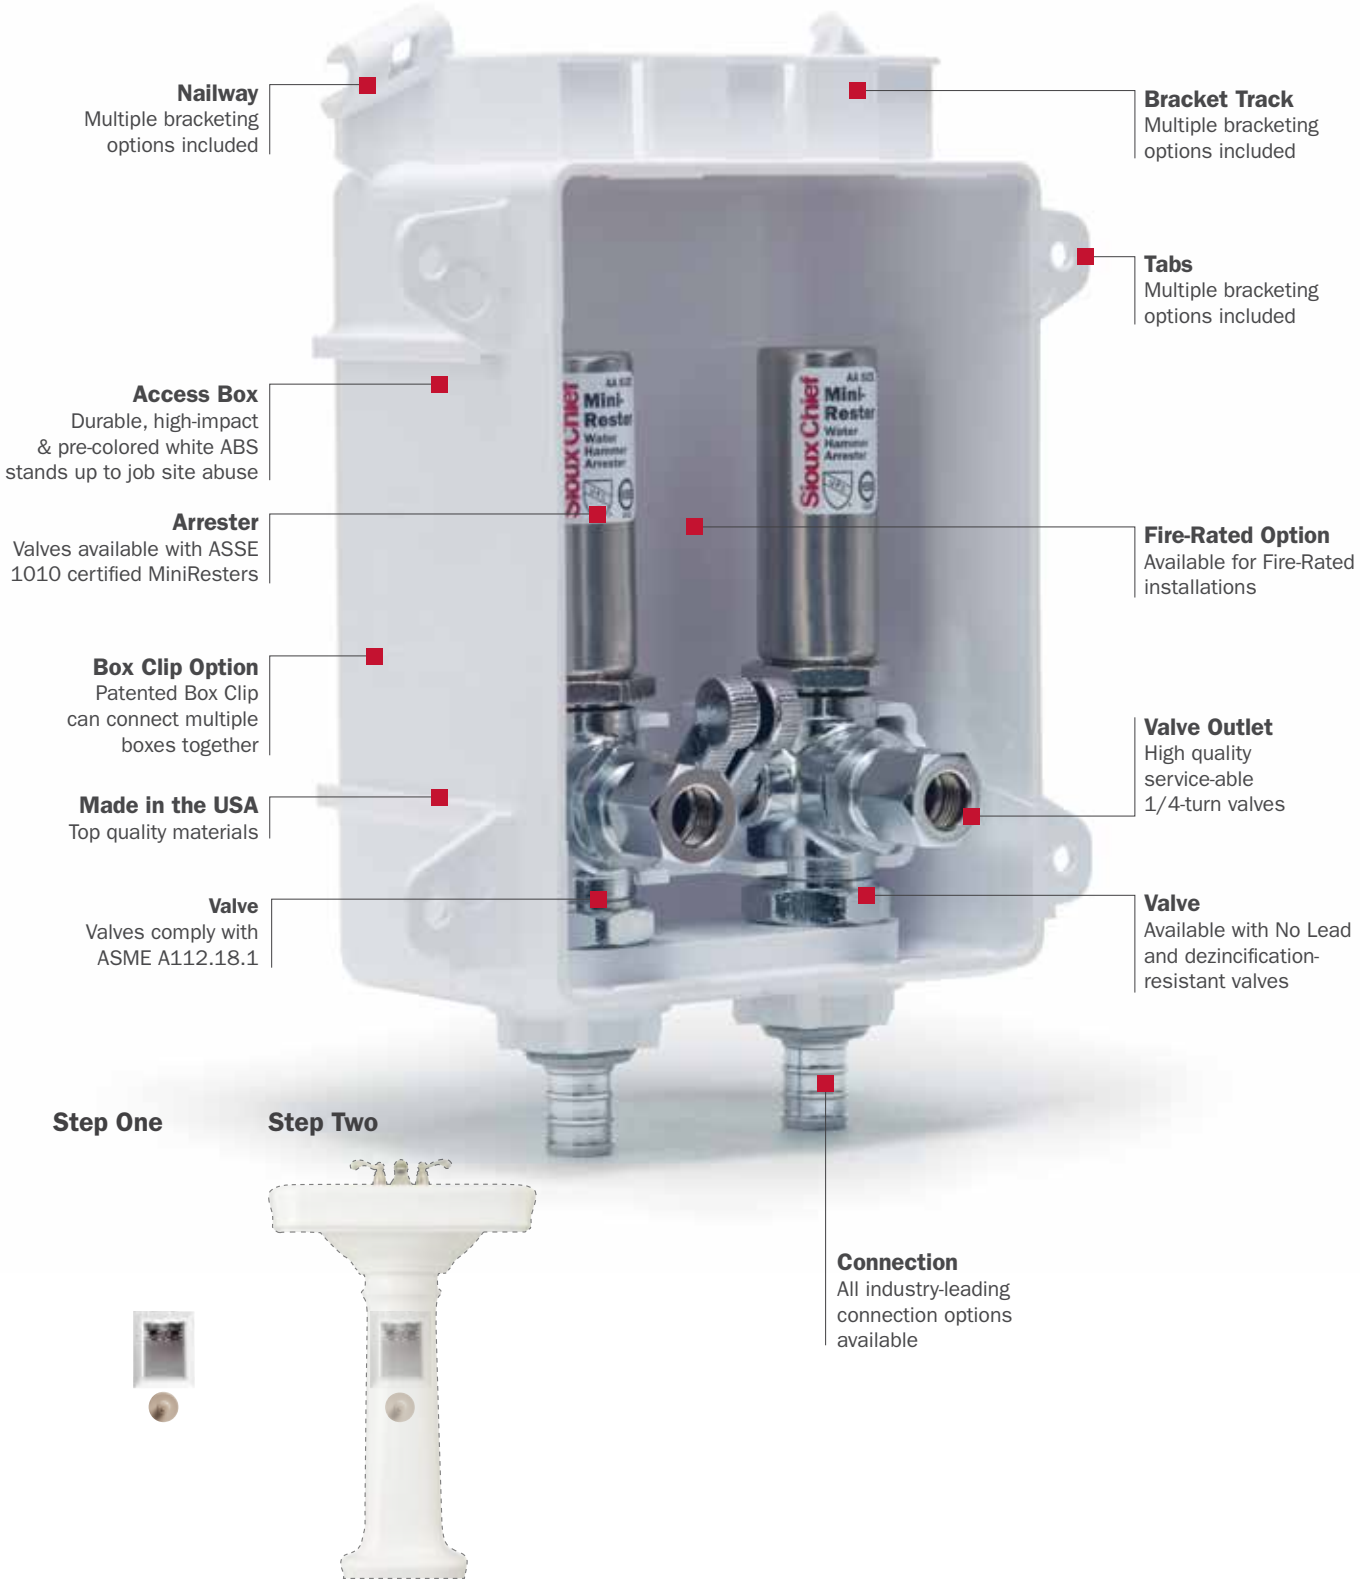

Options & Product Variations

Arrester Product or Standard

- All boxes available in arrester options

No Lead Inlet Connections

- All common connection styles available
- No lead valves are additionally dezincification-resistant and stress-corrosion cracking-resistant

NO LEAD

Rough-In Pack or Standard Pack

- All product is either offered with frame as standard pack or without frame as rough-in pack
- Rough-in packs ship separate from frames, keeping frames clean and secure until the job's end

696-G2001WR

696-G2001WF

Fire-Rated or Regular

- Fire-rated OxBox products are certified by Intertek/Warnock Hersey to the following:

ASTM E-814
2 hours (F), 1½ hours (T)
for 2-hour design
1 hour (F), 31 min (T)
for 1-hour design
UL 1479

ASTM E-119
2 hours (F), 1½ hours (T)
for 2-hour design
1 hour (F), 31 min (T)
for 1-hour design
CAN/ULC S115

Accessories

Frame & Frame Inserts

- The single frame is the same size for all OxBox access boxes
- Notched frame insert conceals the valves and inhibits tampering of valves, leaving hose access
- Frame and frame inserts can be painted or wall-papered to match room decor

696-1F 696-SC 696-SC1

Frame Extensions

- Add 1/2" of additional depth per extension
- Frame extensions can be stacked
- Perfect for attaching frame past the gap between the wall and cabinet back

696-EX

Caps

- Protect valves from undesired operation
- Brass caps with gasket for testing and valve operation protection

696-C1

Debris Cover

- Provided to protect OxBox from drywall dust and debris

696-DC

Box Clip

- Use to strengthen an installation or connect multiple boxes
- Tab folds into metal stud cavity for added rigidity

696-BC

Sliding Support Bracket

- Used to affix box between studs
- Provides protection from drywall installers
- Adjustable length from 9" to 18"

520-09

Application Variations & Layout Options

Kitchen Sink

- Couple Lav box with a single 3/8" compression or 3/4" hose water service box for all supply needs

Side x Side Lav

- Perfect for residential or commercial applications
- Compact box size allows for multiple boxes & drainage in one stud bay

The OxBox System

OxBox
Washing
Machine

OxBox ONE™
Washing Machine

OxBox
Icemaker

OxBox
Toilet &
Dishwasher

OxBox
Gas

OxBox
AAV Box

OxBox 3/4" Hose
Water Service

696-G2001MR



696-G2011MF

696-G2001MF

Buying Information

ITEM NO.	DESCRIPTION	U/M	PKG.	MIN. QTY.	CASE QTY.
OXBOX LAV BOX – STANDARD PACK, NO LEAD					
696-G2001MF	1/2" Female Sweat	EA	BI	10	10
696-G2001CF	1/2" Male CPVC	EA	BI	10	10
696-G2001WF	1/2" ASTM F1960 PEX Grip	EA	BI	10	10
696-G2001XF	1/2" ASTM F1807 PEX Crimp	EA	BI	10	10
696-G2001AF	1/2" ASTM F2080 PEX Lock	EA	BI	10	10
OXBOX LAV BOX – ROUGH-IN PACK (1), NO LEAD					
696-G2001MR	1/2" Female Sweat	EA	BI	10	10
696-G2001CR	1/2" Male CPVC	EA	BI	10	10
696-G2001WR	1/2" ASTM F1960 PEX Grip	EA	BI	10	10
696-G2001XR	1/2" ASTM F1807 PEX Crimp	EA	BI	10	10
OXBOX LAV BOX – STANDARD PACK, NO LEAD W/ MINIRESTER ARRESTERS					
696-G2011MF	1/2" Female Sweat	EA	BI	10	10
696-G2011CF	1/2" Male CPVC	EA	BI	10	10
696-G2011WF	1/2" ASTM F1960 PEX Grip	EA	BI	10	10
696-G2011XF	1/2" ASTM F1807 PEX Crimp	EA	BI	10	10
OXBOX LAV BOX –FIRE RATED STANDARD PACK, NO LEAD					
696RG2001MF	1/2" Female Sweat	EA	BI	10	10
696RG2001CF	1/2" Male CPVC	EA	BI	10	10
696RG2001WF	1/2" ASTM F1960 PEX Grip	EA	BI	10	10
696RG2001XF	1/2" ASTM F1807 PEX Crimp	EA	BI	10	10
ACCESSORIES					
696-SC1	Solid Frame Insert W/ Valve Cutout	EA	B	10	10
696-BC	Box Clip	EA	B	10	10
696-C1	3/8" O.D. Compression Cap (2 Per Bag)	EA	B	10	10
696-EX	Frame Extension	EA	B	10	10
696-1F	OxBox Single Frame	EA	B	10	10
520-09	Sliding Support Bracket	EA	B	250	250

PACKAGING:
B = Bulk
I = Individually Bar-Coded

24110 South Peculiar Drive
Peculiar, Missouri 64078
P 1.800.821.3944
F 1.800.758.5950

Build A Box: 696ABCD

A		B		C		D	
-G	No Lead	2001	Double 3/8" Supply Box Valve	M	1/2" Female Sweat	F	Standard Pack (W/ Frame)
RG	No Lead Fire Rated	2011	Double 3/8" Supply Box Valve W/ MiniRester Water Hammer Arrester	C	1/2" Male CPVC	R	Rough-In Pack (Frame Sold Separately)
				W	1/2" ASTM F1960		
				X	1/2" ASTM F1807		
				A	1/2" ASTM F2080		