SHOWER MODULE DRAIN

825 SERIES

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief 825 series shower module drain shall be used where necessary in drainage systems. Shower drain shall have a two-piece, receptor base design with ABS or PVC Sch. 40 hub connection. Strainer shall meet all applicable load and flow requirements for intended use. Designed in accordance with ASME A112.18.2-2005 / CSA B125.2-05.

MATERIALS

Strainer: 430 stainless steel
Male-thread Top: PVC
Washers: rubber, polyethylene
Female-thread Body: ABS, PVC

825-2P

STRAINER LOAD RATING

300 lbs. (19 gauge)

STRAINER FREE AREA

3.25 in^2

STRAINER FLOW CAPACITY*

6.0 GPM

DIMENSIONS

A:	Connection	1½" Sch. 40 Hub x 2" Spgt. or 2" Sch. 40 Hub
B:	Top Diameter	4¼"
C:	Height	2½" – 3¼"

* Observed flow rate under test conditions at 0.375" head.

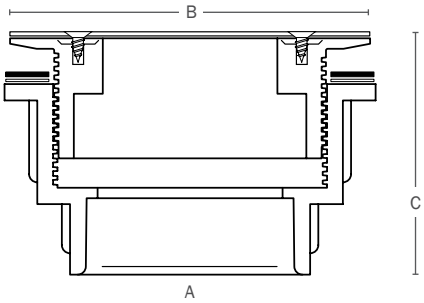

Create Item Number

825-ABC

e.g. 825-2P: Shower module drain with screw-on strainer, no inserts, 2" PVC Sch. 40 hub connection

CONNECTION SIZE A
- ☐ **1** = 1½" Sch. 40 Hub x 2" Spgt. (PVC Only)
- ☐ **2** = 2" Sch. 40 Hub

STRAINER TYPE B
- ☐ _ = Screw-on - No Inserts
- ☐ **0** = Screw-on - Brass Inserts
- ☐ **7** = Snap-in

CONNECTION TYPE C
- ☐ **A** = ABS
- ☐ **P** = PVC