# SHOWER MODULE DRAIN

## 827 SERIES

JackRabbit™

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

### SPECIFICATION

Sioux Chief 827 Series JackRabbit shower module drain shall be used where necessary in drainage systems. Shower drain shall have an outer locknut design with compression gasket connection for Sch. 40 ABS/PVC pipe. Snap-in strainer shall meet all applicable load and flow requirements for intended use. Designed in accordance with ASME A112.18.2-2005 / CSA B125.2-05

### MATERIALS

**Strainer:** Stainless steel
**Body, locknut, compression nut:** Brass
**Washers:** Rubber (sealing), polyethylene (friction)
**Compression gasket:** Rubber

### STRAINER LOAD RATING

300 lbs. (19 gauge)

### STRAINER FREE AREA

300 lbs. (19 gauge)

### FLOW RATE*

6.0 GPM

### DIMENSIONS

| | | |
|---|---|---|
| **A:** | Connection | 2" Sch. 40 |
| **B:** | Strainer diameter | 4-1/2" |
| **C:** | Overall height | 2" |

*Observed flow rate under test conditions at 0.375" head.

827-2J

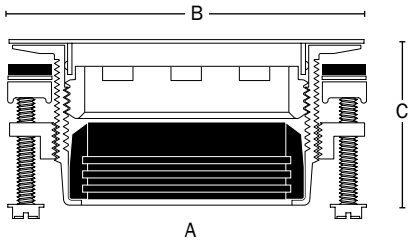


**Item Number**

**827-2J**