# ISOLATING DRIVE HOOK

## 556 SERIES

**PickUp Talon™**

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

### SPECIFICATION

Sioux Chief 556 series PickUp Talon™ CTS drive hook shall be used where necessary to secure CTS copper, PEX, or CPVC tube in piping systems. Drive hook shall be 100% corrosion proof and U.V. resistant. Drive hook shall be impact resistant to 0°F, and be able to withstand continuous temperatures up to 160°F. Drive hook shall include a rust-resistant fastener to provide a secure installation. Drive hook shall protect tube from abrasive mounting surfaces and help reduce 'ticking' and other noise transfer. Drive hook shall snap onto CTS tube for easy installation and allow for expansion and contraction of tube. Drive hook shall be designed to minimize tube damage if fastener is over-driven.

### INSTALLATION

PickUp Talon should be installed in alternating directions (so that the fastener's nail or screw is on alternating sides of the tube being fastened) for secure installation. Install at intervals described in local plumbing code for the type of pipe or tube being secured. For IPS tube, use the next larger size fastener, e.g. for 1/2" IPS tube, use a 3/4" PickUp Talon.

### MATERIALS

**Drive hook:** High-density polyethylene - U.V. protected
**Nail:** Zinc-plated steel, ring shank
**Screw:** Zinc-plated steel, #6 Phillips/pan head, self-drilling tip

556-2
Patent # 7,207,530

### SAFE WORKING LOAD[1]

| 556-2 | 556-3 | 556-4 | 556-5 |
|---|---|---|---|
| 12 lbs. | 16 lbs. | 24 lbs. | 25 lbs. |

### SAFE WORKING TEMPERATURE

Impact resistant to 0° F (18° C)
Maximum Temperature: 160° F (71° C)

### DIMENSIONS

| | 556-2 | 556-3 | 556-4 | 556-5 |
|---|---|---|---|---|
| **A:** Length | 1.12" | 1.39" | 1.82" | 2.13" |
| **B:** Height | 1.02" | 1.38" | 1.81 | 2.26" |
| **C:** Width | 0.38" | 0.40" | 0.45" | 0.71" |
| **D:** Nom. CTS size | 1/2" | 3/4" | 1" | 1-1/4" |

1 Safe working load = Failure load x 0.50

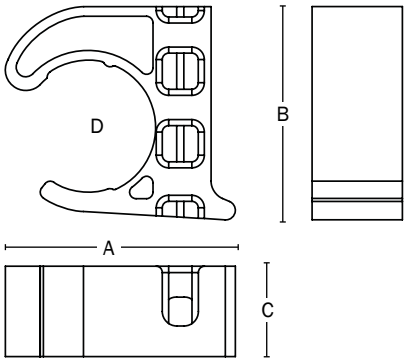


**Create Item Number**

## 556-AB

**e.g. 556-2S:** PickUp Talon 1/2" isolating drive hook with screw

**NOMINAL SIZE A**

- ☐ **2** = 1/2" CTS
- ☐ **3** = 3/4" CTS
- ☐ **4** = 1" CTS
- ☐ **5** = 1-1/4" CTS

**COLOR/FASTENER TYPE B**

- ☐ _ = Black hook with nail[2]
- ☐ **C** = Ivory hook (for CPVC) with nail[3]
- ☐ **S** = Black hook with screw[4]

2 Standard | 3 Not available for 1-1/4" size | 4 Not available for 1" size