WATER HAMMER ARRESTERS

660-GTR SERIES

MiniRester™

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief 660-GTR piston-type water hammer arresters shall be installed where required on supply valves. Water hammer arresters shall be specifically sized and have sufficient volume of air to dissipate the calculated kinetic energy generated by closing residential or commercial faucets or valves. Arresters shall be installed on both hot and cold lines on the supply stops where applicable. Arresters shall be approved for installation with no access panel required.

MATERIALS

Arrester body: 304 stainless steel
Piston: polypropylene with two EPDM o-rings
Tee body: nickel-plated no-lead machined brass

WORKING LIMITS

Max working temperature: 250°F
Max working pressure: 250 PSIG
Burst tested to: 1,500 PSIG

INSTALLATION

Install MiniRester compression connections to supply stops and supply lines. Approved for installation with no access panels required.

CERTIFICATIONS/APPROVALS

Certified by ASSE to the ANSI/ASSE 1010-2004 standard, AA size
cUPC listed to UPC and Canadian codes and standards

660-GTR0B

660-GTRB

660-GTR1B

DIMENSIONS

	¼" OD	⅜" OD	⅝" OD
Overall height	4"	4"	4¼"
Trunk width	2"	2"	2½"

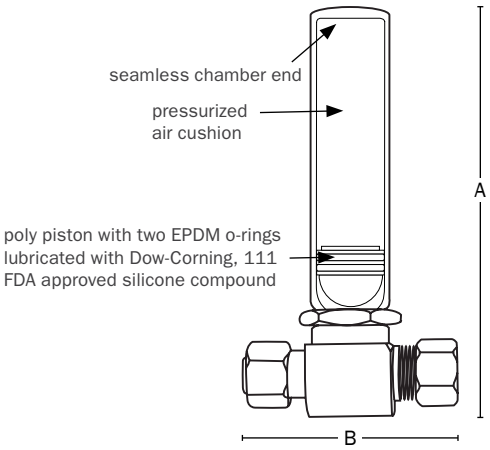

LEAD FREE COMPLIANT · ASSE 1010 · UPC C ®

Choose Item Number

☐ **660-GTR0B** = ¼" OD compression × female compression
☐ **660-GTR1B** = ⅜" OD compression × female compression
☐ **660-GTRB** = ⅝" OD compression × female compression