DOUBLE-DUTY DRIVE HOOK

555 SERIES

TwinTalon™

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief's 555 TwinTalon™ CTS tube fasteners shall be used where necessary to secure CTS tube in piping system. Fastener shall be 100% corrosion proof and U.V. resistant. Fastener shall be impact resistant to 0°F, and be able to withstand continuous temperatures up to 160°F. Fastener shall include a pre-loaded rust-resistant, continuous ring shank nail and designed to avoid tube damage if nail is overdriven. Fastener shall be compatible with copper, PEX or CPVC tube.

INSTALLATION

Snap onto ½" or ¾" CTS tube. Be sure to follow spacing requirements of national and local plumbing codes.

MATERIALS

Fastener body: UV-resistant, high density black polyethylene; 100% corrosion proof
Nail: #7 x 2⅛" Zinc-plated, continuous ring shank
Screw: Rust resistant, zinc-plated Phillips pan head, self-drilling tip

SAFE WORKING LOAD

21 lbs.

SAFE WORKING TEMPERATURE

Impact resistance to 0°F
Maximum Temperature: 160°F (71°C)

DIMENSIONS

A:	Width	1.525"
B:	Height	1.02"
C:	Depth	0.4"
D:	Tube size	½"–¾" CTS

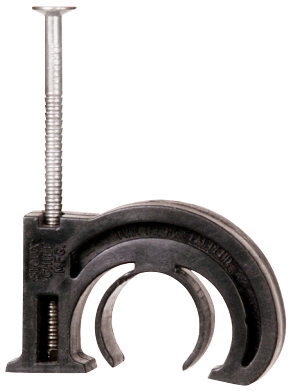

555-23

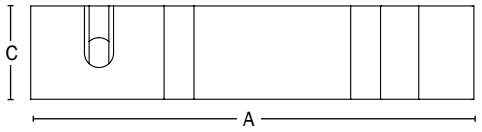

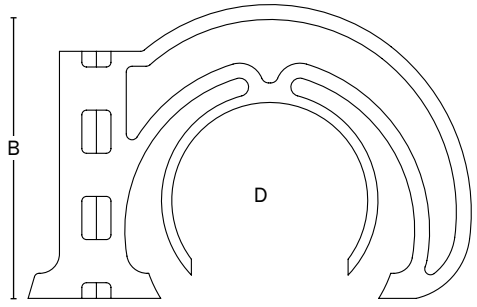

Create Item Number

555-23A

e.g. 555-23S: ½" CTS – ¾" CTS TwinTalon with screw

FASTENER A

☐ _ = nail (leave blank)
☐ **S** = screw