



Specification Grade 400 and 250 Watt HID floodlight with cutting edge design, architectural quality, superior features and mounting options at competitive prices.

Color: Bronze

Weight: 33.8 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	ED18
Watts	250W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	24,000
Lamp Lumens	28,500
Efficacy	96.6 LPW

Ballast Info

Type	CWA-HPF QT
120V	N/A
208V	N/A
240V	N/A
277V	0.7/1.1A
Input Watts	295W
Efficiency	85%

Technical Specifications

Electrical

Photocell:

277V Swivel Photocell Included. Photocell is compatible with 208V-277V.

Socket:

HID Porcelain 4kv Pulse Rated socket with nickel plated screw shell CFL Plug in type, GX24q-4 base

Listings

UL Listing:

Suitable for wet locations. Suitable for ground mounting.

Construction

Housing:

Precision die cast aluminum with Wall Bracket, Trunnion or Slipfitter

Reflector:

Anodized aluminum. Field adjustable beam spread.

Lens Frame & Glare Shield:

Precision die cast aluminum. Hinged for easy access. Phillips head screws for added security.

Finish:

Formulated for high durability and long-lasting color

Lens:

Thermal tempered shock resistant glass, 3/16" thick

Lens Gasket:

High-temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping.

EPA:

Maximum EPA 2.0.

Other


Patents:

Pat. D552,283.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

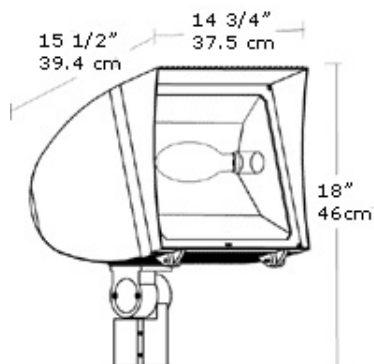

Features

Integra hood glare shield for friendly lighting when properly aimed

Silicone gasket for durable weatherproofing & easy relamping

Precision die cast aluminum housing and lens frame with durable polyester powder coating

Anodized aluminum reflector

Mogul base 4kv pulse rated socket

Two field adjustable socket positions allow fine tuning of beam spread

Fins for heat dissipation extend lamp and ballast life