# **SIEMENS**

Data sheet 3RV2111-0HA10

Circuit breaker size S00 for motor protection, CLASS 10 with overload relay function A-release 0.55...0.8 A N-release 10 A screw terminal Standard switching capacity



product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection with overload relay function
product type designation	3RV2

General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension	
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	7.25 W
• at AC in hot operating state per pole	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	400 V

<ul> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	400 V
protection class IP	
• on the front	IP20
• of the terminal	IP20
shock resistance	
• acc. to IEC 60068-2-27	25g / 11 ms
mechanical service life (switching cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
of auxiliary contacts typical	100 000
electrical endurance (switching cycles)	
• typical	100 000
reference code acc. to DIN EN 81346-2	Q
Ambient conditions	
installation altitude at height above sea level	2 000 m
maximum	
ambient temperature	
<ul><li>during operation</li></ul>	-20 +60 °C
during storage	-50 +80 °C
<ul> <li>during transport</li> </ul>	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
relative numbers during operation	10 33 /0
Main circuit	
Main circuit number of poles for main current circuit	3
Main circuit  number of poles for main current circuit  adjustable pick-up value current of the current-	
Main circuit  number of poles for main current circuit  adjustable pick-up value current of the current- dependent overload release	3
Main circuit  number of poles for main current circuit  adjustable pick-up value current of the current- dependent overload release operating voltage	3 0.55 0.8 A
Main circuit  number of poles for main current circuit  adjustable pick-up value current of the current- dependent overload release  operating voltage  • rated value	3 0.55 0.8 A 690 V
Main circuit  number of poles for main current circuit  adjustable pick-up value current of the current- dependent overload release  operating voltage  • rated value  • at AC-3 rated value maximum	3 0.55 0.8 A 690 V 690 V
number of poles for main current circuit  adjustable pick-up value current of the current- dependent overload release  operating voltage  • rated value  • at AC-3 rated value maximum  operating frequency rated value	3 0.55 0.8 A 690 V 690 V 50 60 Hz
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage  • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value	3 0.55 0.8 A 690 V 690 V
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating current	3 0.55 0.8 A 690 V 690 V 50 60 Hz
Main circuit  number of poles for main current circuit  adjustable pick-up value current of the current- dependent overload release  operating voltage  • rated value  • at AC-3 rated value maximum  operating frequency rated value  operating current rated value  operating current  • at AC-3	3 0.55 0.8 A 690 V 690 V 50 60 Hz 0.8 A
number of poles for main current circuit  adjustable pick-up value current of the current- dependent overload release  operating voltage  • rated value  • at AC-3 rated value maximum  operating frequency rated value  operating current rated value  operating current  • at AC-3  — at 400 V rated value	3 0.55 0.8 A 690 V 690 V 50 60 Hz
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating current • at AC-3 — at 400 V rated value operating power	3 0.55 0.8 A 690 V 690 V 50 60 Hz 0.8 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating current • at AC-3 — at 400 V rated value operating power • at AC-3	3 0.55 0.8 A 690 V 690 V 50 60 Hz 0.8 A
number of poles for main current circuit  adjustable pick-up value current of the current- dependent overload release  operating voltage  • rated value  • at AC-3 rated value maximum  operating frequency rated value  operating current rated value  operating current  • at AC-3  — at 400 V rated value  operating power  • at AC-3  — at 230 V rated value	3 0.55 0.8 A 690 V 690 V 50 60 Hz 0.8 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating current • at AC-3 — at 400 V rated value operating power • at AC-3 — at 230 V rated value — at 400 V rated value	3 0.55 0.8 A 690 V 690 V 50 60 Hz 0.8 A 120 W 180 W
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating current • at AC-3 — at 400 V rated value operating power • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value	3 0.55 0.8 A 690 V 690 V 50 60 Hz 0.8 A 120 W 180 W 250 W
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating current • at AC-3 — at 400 V rated value operating power • at AC-3 — at 230 V rated value — at 500 V rated value — at 690 V rated value — at 690 V rated value	3 0.55 0.8 A 690 V 690 V 50 60 Hz 0.8 A 120 W 180 W
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating current • at AC-3 — at 400 V rated value operating power • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value	3 0.55 0.8 A 690 V 690 V 50 60 Hz 0.8 A 120 W 180 W 250 W

Auxiliary circuit	
design of the auxiliary switch	laterally
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts	
• for auxiliary contacts	0
operating current of auxiliary contacts at AC-15	
• at 24 V	1.5 A
• at 230 V	1.5 A
operating current of auxiliary contacts at DC-13	
● at 24 V	1 A
Protective and monitoring functions	
product function	
<ul><li>ground fault detection</li></ul>	No
<ul> <li>phase failure detection</li> </ul>	Yes
trip class	CLASS 10
design of the overload release	thermal
operational short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
• at 400 V rated value	100 kA
• at 500 V rated value	100 kA
• at 690 V rated value	100 kA
maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	100 kA
• at AC at 500 V rated value	100 kA
• at AC at 690 V rated value	100 kA
response value current	
<ul> <li>of instantaneous short-circuit trip unit</li> </ul>	10 A
UL/CSA ratings	
full-load current (FLA) for three-phase AC motor	
● at 480 V rated value	0.8 A
● at 600 V rated value	0.8 A
contact rating of auxiliary contacts according to UL	C600 / R300
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link	
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gL/gG: 6 A, quick: 10 A

# design of the fuse link for IT network for short-circuit protection of the main circuit

• at 690 V

gL/gG 6 A

mounting position	any
mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
height	97 mm
width	65 mm
depth	97 mm
required spacing	
• for grounded parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— backwards	0 mm
— at the side	9 mm
— forwards	0 mm
• for live parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— backwards	0 mm
— at the side	9 mm
— forwards	0 mm
• for grounded parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— backwards	0 mm
— at the side	9 mm
— forwards	0 mm
• for live parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— backwards	0 mm
— at the side	9 mm
— forwards	0 mm
• for grounded parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm

● for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm

Connections/ Terminals	
product function	
removable terminal for auxiliary and control	No
circuit	
type of electrical connection	
for main current circuit	screw-type terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
• for main contacts	
<ul> <li>single or multi-stranded</li> </ul>	2x (0,75 2,5 mm²), 2x 4 mm²
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>at AWG conductors for main contacts</li> </ul>	2x (18 14), 2x 12
<ul> <li>type of connectable conductor cross-sections for auxiliary contacts</li> </ul>	
<ul> <li>single or multi-stranded</li> </ul>	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>type of connectable conductor cross-sections at AWG conductors for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
tightening torque	
• for main contacts with screw-type terminals	0.8 1.2 N·m
• for auxiliary contacts with screw-type terminals	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv 2
design of the thread of the connection screw	
• for main contacts	M3
<ul> <li>of the auxiliary and control contacts</li> </ul>	M3

Safety related data	
B10 value	
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	5 000
proportion of dangerous failures	
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	50 %
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	50 %
failure rate [FIT]	
• with low demand rate acc. to SN 31920	50 FIT

T1 value for proof test interval or service life acc. to IEC 61508

10 y


display version

• for switching status

Handle

## Certificates/ approvals

#### **General Product Approval**













Miscellaneous

#### **Test Certificates**

### Marine / Shipping

Type Test Certificates/Test Report

Special Test Certificate









# Marine / Shipping

other

Railway







Confirmation



Vibration and Shock

#### Railway

Confirmation

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2111-0HA10

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2111-0HA10}\\$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RV2111-0HA10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2111-0HA10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RV2111-0HA10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2111-0HA10&objecttype=14&gridview=view1

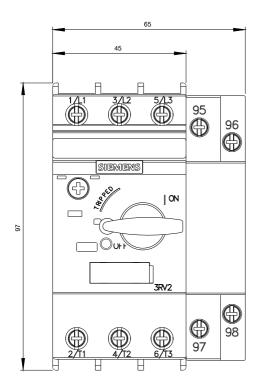

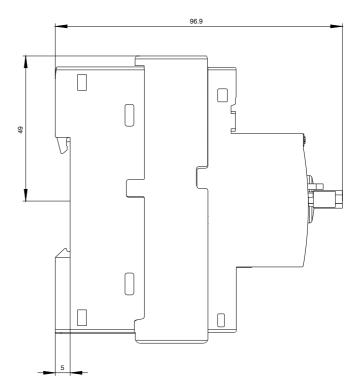

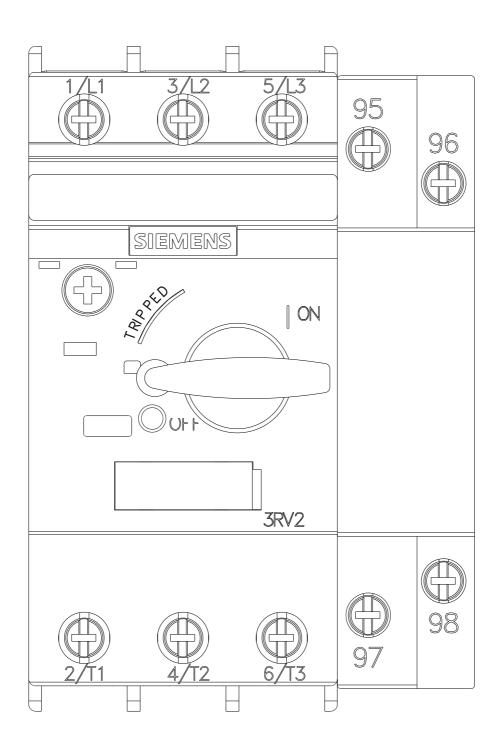

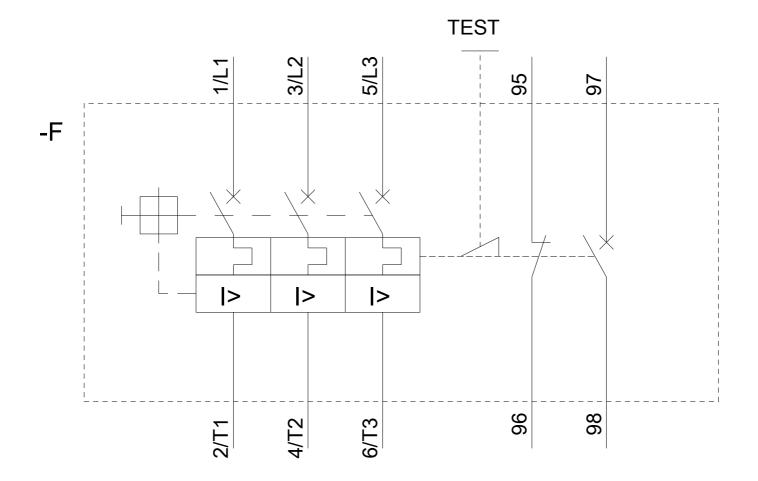

last modified: 09/24/2020