# Product data sheet

Specifications

## Glazed steel door, PanelSeT CRN, without mounting plate, 1000x1000x300mm, IP66, IK08, RAL7035

NSYCRN1010300T

**Product availability: Non-Stock - Not normally stocked in distribution facility**

## Main

| | |
|---|---|
| **Range** | PanelSeT |
| **Product name** | PanelSeT CRN |
| **Application** | Multi-purpose |
| **Category** | Compact enclosure |
| **Enclosure nominal height** | 39.4 in (1000 mm) |
| **Enclosure nominal width** | 39.4 in (1000 mm) |
| **Enclosure nominal depth** | 11.8 in (300 mm) |
| **Installation accessory type** | Wall-mounting |
| **Device composition** | 1 body<br>1 lock<br>2 cable gland plate bottom<br>2 door |
| **Door type** | Glass |
| **Mounting plate description** | Without mounting plate |

## Complementary

| | |
|---|---|
| **body type** | Single piece body |
| **Number of doors** | Front face 2 |
| **Door opening side** | Reversible 120 °) |
| **Lock type** | 3 points lock, 5 mm double-bar |
| **Type of gland plate** | Standard |
| **Accessibility for operation** | Front |
| **Removable parts** | Door by hinges<br>Cable gland plate by screws |
| **Material** | Body steel<br>Door steel and security glass |
| **Surface finish** | epoxy-polyester powder |
| **color** | Gray RAL 7035) |
| **Standards** | IEC 62208<br>UL<br>CUL |
| **Product Certifications** | cUL<br>UL |
| **Product Weight** | 103.6 lb(US) (47 kg) |

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Environment

| | |
|---|---|
| **IP degree of protection** | IP55 IEC 60529 |
| **IK degree of protection** | IK08 IEC 62262 |

## Ordering and shipping details

| | |
|---|---|
| **Category** | US10ES180034 |
| **Discount Schedule** | 0ES1 |
| **GTIN** | 3606485891484 |
| **Returnability** | No |
| **Country of origin** | ES |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Nbr. of units in pkg.** | 1 |
| **Package 1 Height** | 40.35 in (102.5 cm) |
| **Package 1 Width** | 40.35 in (102.5 cm) |
| **Package 1 Length** | 12.60 in (32 cm) |
| **Package weight(Lbs)** | 87.7 lb(US) (39.8 kg) |
| **Unit Type of Package 2** | PAL |
| **Number of Units in Package 2** | 3 |
| **Package 2 Height** | 46.06 in (117 cm) |
| **Package 2 Width** | 39.37 in (100 cm) |
| **Package 2 Length** | 47.24 in (120 cm) |
| **Package 2 Weight** | 263.2 lb(US) (119.4 kg) |

## Contractual warranty

| | |
|---|---|
| **Coverage** | Core product |
| **Warranty** | 18 months |

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained

How we assess product sustainability

### Environmental footprint

| | |
|---|---|
| Carbon footprint (kg CO2 eq, Total Life cycle) | 375 |
| Environmental Disclosure | Product Environmental Profile |

## Use Better

### Materials and Substances

| | |
|---|---|
| Packaging made with recycled cardboard | No |
| Packaging without single use plastic | No |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| SCIP Number | Ba0ee14c-eebb-47d8-a070-ade906247bb0 |
| REACh Regulation | REACh Declaration |

## Use Again

### Repack and remanufacture

| | |
|---|---|
| Circularity Profile | No need of specific recycling operations |
| Take-back | No |

Technical Illustration

**Dimensions**

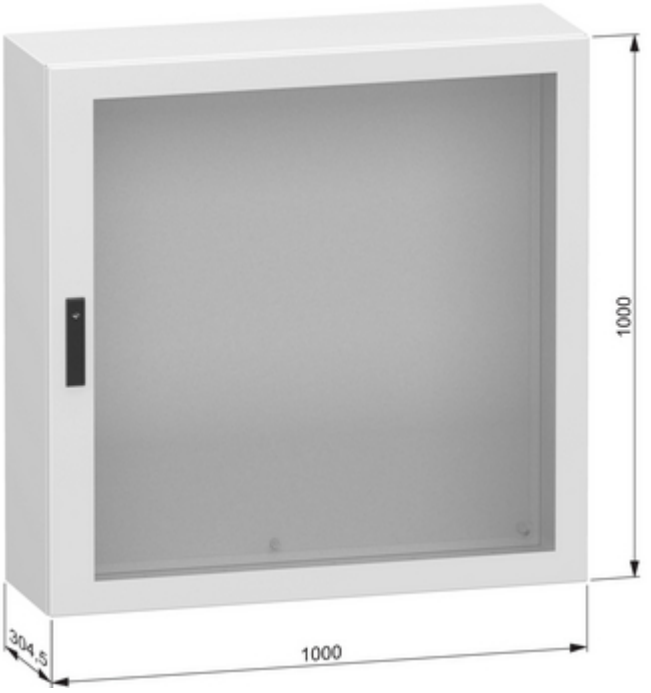

Offer Marketing Illustration

**Product benefits / Features**

Image of product / Alternate images

**Alternative**