

power contactor, AC-3 95 A, 45 kW / 400 V 1 NO + 1 NC, 600 V AC, 60 Hz 3-pole, 3 NO, Size S3 screw terminal



|                          |                 |
|--------------------------|-----------------|
| product brand name       | SIRIUS          |
| product designation      | Power contactor |
| product type designation | 3RT2            |

| General technical data  |        |
|---|--------|
| size of contactor   | S3     |
| product extension   |        |
| <ul style="list-style-type: none"> <li>function module for communication</li> </ul>                 | No     |
| <ul style="list-style-type: none"> <li>auxiliary switch</li> </ul>                                  | Yes    |
| power loss [W] for rated value of the current   |        |
| <ul style="list-style-type: none"> <li>at AC in hot operating state</li> </ul>                      | 19.8 W |
| <ul style="list-style-type: none"> <li>at AC in hot operating state per pole</li> </ul>             | 6.6 W  |
| power loss [W] for rated value of the current without load current share typical                    | 21 W   |
| surge voltage resistance  |        |
| <ul style="list-style-type: none"> <li>of main circuit rated value</li> </ul>                       | 8 kV   |
| <ul style="list-style-type: none"> <li>of auxiliary circuit rated value</li> </ul>                  | 6 kV   |
| maximum permissible voltage for safe isolation  |        |
| <ul style="list-style-type: none"> <li>between coil and main contacts acc. to EN 60947-1</li> </ul> | 690 V  |

|   |                                       |
|---|---------------------------------------|
| <b>protection class IP</b>  |                                       |
| <ul style="list-style-type: none"> <li>• on the front</li> <li>• of the terminal</li> </ul>   | IP20<br>IP00                          |
| <b>shock resistance at rectangular impulse</b>  |                                       |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 6.7 g / 5 ms, 4.0 g / 10 ms           |
| <b>shock resistance with sine pulse</b>   |                                       |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 10.6 g / 5 ms, 6.3 g / 10 ms          |
| <b>mechanical service life (switching cycles)</b>   |                                       |
| <ul style="list-style-type: none"> <li>• of contactor typical</li> <li>• of the contactor with added electronics-compatible auxiliary switch block typical</li> <li>• of the contactor with added auxiliary switch block typical</li> </ul> | 10 000 000<br>5 000 000<br>10 000 000 |
| <b>reference code acc. to DIN EN 81346-2</b>  | Q                                     |

|   |                                  |
|---|----------------------------------|
| <b>Ambient conditions</b>   |                                  |
| <ul style="list-style-type: none"> <li>• installation altitude at height above sea level maximum</li> </ul> | 2 000 m                          |
| <b>ambient temperature</b>  |                                  |
| <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>              | -25 ... +60 °C<br>-55 ... +80 °C |

|  |   |
|--|---|
| <b>Main circuit</b>  |   |
| <b>number of poles for main current circuit</b>  | 3   |
| <b>number of NO contacts for main contacts</b>   | 3   |
| <b>operating voltage</b>   |   |
| <ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>  | 1 000 V   |
| <b>operating current</b>   |   |
| <ul style="list-style-type: none"> <li>• at AC-1 at 400 V <ul style="list-style-type: none"> <li>— at ambient temperature 40 °C rated value</li> </ul> </li> <li>• at AC-1 <ul style="list-style-type: none"> <li>— up to 690 V at ambient temperature 40 °C rated value</li> <li>— up to 690 V at ambient temperature 60 °C rated value</li> <li>— up to 1000 V at ambient temperature 40 °C rated value</li> <li>— up to 1000 V at ambient temperature 60 °C rated value</li> </ul> </li> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>• at AC-4 at 400 V rated value</li> </ul> | 130 A<br>130 A<br>110 A<br>70 A<br>60 A<br>95 A<br>95 A<br>78 A<br>80 A |

|   |                    |
|---|--------------------|
| <ul style="list-style-type: none"> <li>• at AC-5a up to 690 V rated value</li> </ul>  | 114 A              |
| <ul style="list-style-type: none"> <li>• at AC-5b up to 400 V rated value</li> </ul>  | 95 A               |
| <ul style="list-style-type: none"> <li>• at AC-6a <ul style="list-style-type: none"> <li>— up to 230 V for current peak value n=20 rated value</li> </ul> </li> </ul> | 84.4 A             |
| <ul style="list-style-type: none"> <li>— up to 400 V for current peak value n=20 rated value</li> </ul>   | 84.4 A             |
| <ul style="list-style-type: none"> <li>— up to 500 V for current peak value n=20 rated value</li> </ul>   | 84.4 A             |
| <ul style="list-style-type: none"> <li>— up to 690 V for current peak value n=20 rated value</li> </ul>   | 58 A               |
| <ul style="list-style-type: none"> <li>• at AC-6a <ul style="list-style-type: none"> <li>— up to 230 V for current peak value n=30 rated value</li> </ul> </li> </ul> | 56.3 A             |
| <ul style="list-style-type: none"> <li>— up to 400 V for current peak value n=30 rated value</li> </ul>   | 56.3 A             |
| <ul style="list-style-type: none"> <li>— up to 500 V for current peak value n=30 rated value</li> </ul>   | 56.3 A             |
| <ul style="list-style-type: none"> <li>— up to 690 V for current peak value n=30 rated value</li> </ul>   | 56.3 A             |
| <b>minimum cross-section in main circuit</b>  |                    |
| <ul style="list-style-type: none"> <li>• at maximum AC-1 rated value</li> </ul>   | 50 mm <sup>2</sup> |
| <b>operating current for approx. 200000 operating cycles at AC-4</b>  |                    |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>  | 42 A               |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>  | 30 A               |
| <b>operating current</b>  |                    |
| <ul style="list-style-type: none"> <li>• at 1 current path at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> </ul> </li> </ul>                | 100 A              |
| <ul style="list-style-type: none"> <li>— at 110 V rated value</li> </ul>  | 9 A                |
| <ul style="list-style-type: none"> <li>— at 220 V rated value</li> </ul>  | 2 A                |
| <ul style="list-style-type: none"> <li>— at 440 V rated value</li> </ul>  | 0.6 A              |
| <ul style="list-style-type: none"> <li>— at 600 V rated value</li> </ul>  | 0.4 A              |
| <ul style="list-style-type: none"> <li>• with 2 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> </ul> </li> </ul>   | 100 A              |
| <ul style="list-style-type: none"> <li>— at 110 V rated value</li> </ul>  | 100 A              |
| <ul style="list-style-type: none"> <li>— at 220 V rated value</li> </ul>  | 10 A               |
| <ul style="list-style-type: none"> <li>— at 440 V rated value</li> </ul>  | 1.8 A              |
| <ul style="list-style-type: none"> <li>— at 600 V rated value</li> </ul>  | 1 A                |
| <ul style="list-style-type: none"> <li>• with 3 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> </ul> </li> </ul>   | 100 A              |
| <ul style="list-style-type: none"> <li>— at 110 V rated value</li> </ul>  | 100 A              |
| <ul style="list-style-type: none"> <li>— at 220 V rated value</li> </ul>  | 80 A               |

|  |         |
|--|---------|
| — at 440 V rated value   | 4.5 A   |
| — at 600 V rated value   | 2.6 A   |
| <b>operating current</b>   |         |
| • at 1 current path at DC-3 at DC-5                                |         |
| — at 24 V rated value  | 40 A    |
| — at 110 V rated value   | 2.5 A   |
| — at 220 V rated value   | 1 A     |
| — at 440 V rated value   | 0.15 A  |
| — at 600 V rated value   | 0.06 A  |
| • with 2 current paths in series at DC-3 at DC-5                   |         |
| — at 24 V rated value  | 100 A   |
| — at 110 V rated value   | 100 A   |
| — at 220 V rated value   | 7 A     |
| — at 440 V rated value   | 0.42 A  |
| — at 600 V rated value   | 0.16 A  |
| • with 3 current paths in series at DC-3 at DC-5                   |         |
| — at 24 V rated value  | 100 A   |
| — at 110 V rated value   | 100 A   |
| — at 220 V rated value   | 35 A    |
| — at 440 V rated value   | 0.8 A   |
| — at 600 V rated value   | 0.35 A  |
| <b>operating power</b>   |         |
| • at AC-2 at 400 V rated value                                     | 45 kW   |
| • at AC-3  |         |
| — at 230 V rated value   | 22 kW   |
| — at 400 V rated value   | 45 kW   |
| — at 500 V rated value   | 55 kW   |
| — at 690 V rated value   | 75 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> |         |
| • at 400 V rated value   | 22 kW   |
| • at 690 V rated value   | 27.4 kW |
| <b>operating apparent output at AC-6a</b>                          |         |
| • up to 230 V for current peak value n=20 rated value              | 33 kV·A |
| • up to 400 V for current peak value n=20 rated value              | 58 kV·A |
| • up to 500 V for current peak value n=20 rated value              | 73 kV·A |
| • up to 690 V for current peak value n=20 rated value              | 69 kV·A |
| <b>operating apparent output at AC-6a</b>                          |         |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=30 rated value</li> </ul> | 22.4 kV·A   |
| <ul style="list-style-type: none"> <li>• up to 400 V for current peak value n=30 rated value</li> </ul> | 39 kV·A   |
| <ul style="list-style-type: none"> <li>• up to 500 V for current peak value n=30 rated value</li> </ul> | 48.7 kV·A   |
| <ul style="list-style-type: none"> <li>• up to 690 V for current peak value n=30 rated value</li> </ul> | 67.3 kV·A   |
| <b>short-time withstand current in cold operating state up to 40 °C</b>                                 |   |
| <ul style="list-style-type: none"> <li>• limited to 1 s switching at zero current maximum</li> </ul>    | 1 725 A; Use minimum cross-section acc. to AC-1 rated value |
| <ul style="list-style-type: none"> <li>• limited to 5 s switching at zero current maximum</li> </ul>    | 1 297 A; Use minimum cross-section acc. to AC-1 rated value |
| <ul style="list-style-type: none"> <li>• limited to 10 s switching at zero current maximum</li> </ul>   | 946 A; Use minimum cross-section acc. to AC-1 rated value   |
| <ul style="list-style-type: none"> <li>• limited to 30 s switching at zero current maximum</li> </ul>   | 610 A; Use minimum cross-section acc. to AC-1 rated value   |
| <ul style="list-style-type: none"> <li>• limited to 60 s switching at zero current maximum</li> </ul>   | 486 A; Use minimum cross-section acc. to AC-1 rated value   |
| <b>no-load switching frequency</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 5 000 1/h   |
| <b>operating frequency</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> </ul>                                     | 900 1/h   |
| <ul style="list-style-type: none"> <li>• at AC-2 maximum</li> </ul>                                     | 350 1/h   |
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> </ul>                                     | 850 1/h   |
| <ul style="list-style-type: none"> <li>• at AC-4 maximum</li> </ul>                                     | 250 1/h   |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | AC  |
| <b>control supply voltage at AC</b>   |   |
| <ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>                                | 600 V   |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>                   |   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 0.85 ... 1.1  |
| <b>apparent pick-up power of magnet coil at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 322 V·A   |
| <b>inductive power factor with closing power of the coil</b>  |   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 0.55  |
| <b>apparent holding power of magnet coil at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 21 V·A  |
| <b>inductive power factor with the holding power of the coil</b>  |   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 0.4   |
| <b>closing delay</b>  |   |

|   |                  |
|---|------------------|
| <ul style="list-style-type: none"> <li>• at AC</li> </ul> | 13 ... 50 ms     |
| <b>opening delay</b>                                      |                  |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul> | 10 ... 21 ms     |
| <b>arcing time</b>  | 10 ... 20 ms     |
| <b>control version of the switch operating mechanism</b>  | Standard A1 - A2 |

#### Auxiliary circuit

|   |  |
|---|--|
| <b>number of NC contacts for auxiliary contacts</b>   |  |
| <ul style="list-style-type: none"> <li>• instantaneous contact</li> </ul>   | 1  |
| <b>number of NO contacts for auxiliary contacts</b>   |  |
| <ul style="list-style-type: none"> <li>• instantaneous contact</li> </ul>   | 1  |
| <b>operating current at AC-12 maximum</b>   | 10 A   |
| <b>operating current at AC-15</b>   |  |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>  | 6 A<br>3 A<br>2 A<br>1 A                             |
| <b>operating current at DC-12</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>6 A<br>6 A<br>3 A<br>2 A<br>1 A<br>0.15 A    |
| <b>operating current at DC-13</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | 10 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.1 A |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)      |

#### UL/CSA ratings

|   |                |
|---|----------------|
| <b>full-load current (FLA) for three-phase AC motor</b>   |                |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 96 A<br>77 A   |
| <b>yielded mechanical performance [hp]</b>  |                |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> </ul> | 10 hp<br>20 hp |

|  |                                  |
|--|----------------------------------|
| <ul style="list-style-type: none"> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | 30 hp<br>30 hp<br>75 hp<br>75 hp |
| <b>contact rating of auxiliary contacts according to UL</b>  | A600 / P600                      |

### Short-circuit protection

|   |  |
|---|--|
| <b>design of the fuse link</b>  |  |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)<br>gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)<br>gG: 10 A (500 V, 1 kA) |

### Installation/ mounting/ dimensions

|   |  |
|---|--|
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>mounting type</b>  | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715   |
| <ul style="list-style-type: none"> <li>• side-by-side mounting</li> </ul>   | Yes  |
| <b>height</b>   | 140 mm   |
| <b>width</b>  | 70 mm  |
| <b>depth</b>  | 152 mm   |
| <b>required spacing</b>   |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 20 mm<br>10 mm<br>10 mm<br>0 mm<br>20 mm<br>10 mm<br>10 mm<br>10 mm<br>20 mm<br>10 mm<br>10 mm<br>10 mm                              |

### Connections/ Terminals

|  |   |
|--|---|
| <b>type of electrical connection</b>   |   |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>   | <p>screw-type terminals</p> <p>screw-type terminals</p> <p>Screw-type terminals</p> <p>Screw-type terminals</p>   |
| <b>type of connectable conductor cross-sections</b>  |   |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG conductors for main contacts</li> </ul>   | <p>2x (2.5 ... 35 mm<sup>2</sup>), 1x (2.5 ... 50 mm<sup>2</sup>)</p> <p>2x (10 ... 1/0), 1x (10 ... 2)</p>   |
| <b>connectable conductor cross-section for main contacts</b>   |   |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded with core end processing</li> </ul>  | <p>2.5 ... 16 mm<sup>2</sup></p> <p>6 ... 70 mm<sup>2</sup></p> <p>2.5 ... 50 mm<sup>2</sup></p>  |
| <b>connectable conductor cross-section for auxiliary contacts</b>  |   |
| <ul style="list-style-type: none"> <li>• single or multi-stranded</li> <li>• finely stranded with core end processing</li> </ul>   | <p>0.5 ... 2.5 mm<sup>2</sup></p> <p>0.5 ... 2.5 mm<sup>2</sup></p>   |
| <ul style="list-style-type: none"> <li>• type of connectable conductor cross-sections for auxiliary contacts <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• type of connectable conductor cross-sections at AWG conductors for auxiliary contacts</li> </ul> | <p>2x (0,5 ... 1,5 mm<sup>2</sup>), 2x (0,75 ... 2,5 mm<sup>2</sup>)</p> <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</p> <p>2x (20 ... 16), 2x (18 ... 14)</p> |
| <b>AWG number as coded connectable conductor cross section</b>   |   |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary contacts</li> </ul>  | <p>10 ... 2</p> <p>20 ... 14</p>  |

#### Safety related data













|   |  |
|---|--|
| <b>B10 value</b>  |  |
| <ul style="list-style-type: none"> <li>• with high demand rate acc. to SN 31920</li> </ul>  | 1 000 000  |
| <b>proportion of dangerous failures</b>   |  |
| <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> <li>• with high demand rate acc. to SN 31920</li> </ul>           | <p>40 %</p> <p>73 %</p>  |
| <b>failure rate [FIT]</b>   |  |
| <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> </ul>   | 100 FIT  |
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>• mirror contact acc. to IEC 60947-4-1</li> <li>• positively driven operation acc. to IEC 60947-5-1</li> </ul> | <p>Yes</p> <p>No</p>   |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>   | 20 y   |
| <b>protection against electrical shock</b>  | finger-safe when touched vertically from front acc. to IEC 60529 |



suitability for use safety-related switching OFF

Yes

## Certificates/ approvals

| General Product Approval  |   |   |   | EMC  |  |
|---|---|---|---|--|--|
| <br>CCC      | <br>CSA  | <br>UL   | <a href="#">KC</a>  |         | <br>RCM |
| Declaration of Conformity   |   | Test Certificates   |   | Marine / Shipping  |  |
| <br>EG-Konf. | <a href="#">Miscellaneous</a>   | <a href="#">Type Test Certificates/Test Report</a>  | <a href="#">Special Test Certificate</a>  | <br>ABS | <br>LRS |
| Marine / Shipping   |   |   | other   | Railway  |  |
| <br>PRS      | <br>RINA | <br>RMRS | <br>DNV-GL<br>DNVGL.COM/AF | <a href="#">Confirmation</a>   | <a href="#">Vibration and Shock</a>  |

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2046-1AT60>

### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2046-1AT60>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1AT60>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2046-1AT60&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2046-1AT60&lang=en)


### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1AT60/char>

### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2046-1AT60&objecttype=14&gridview=view1>

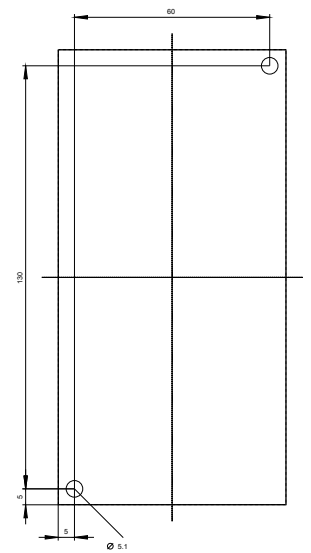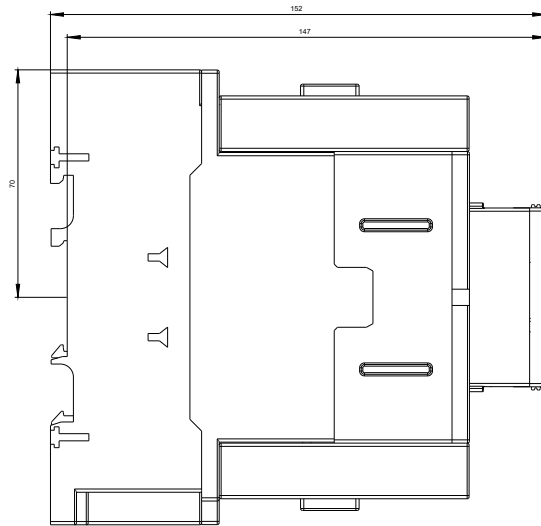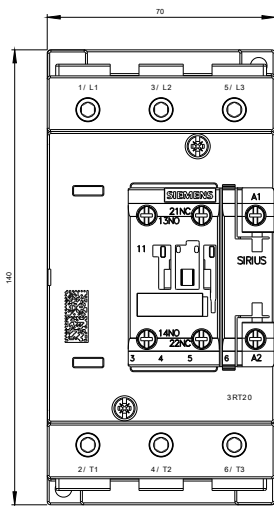

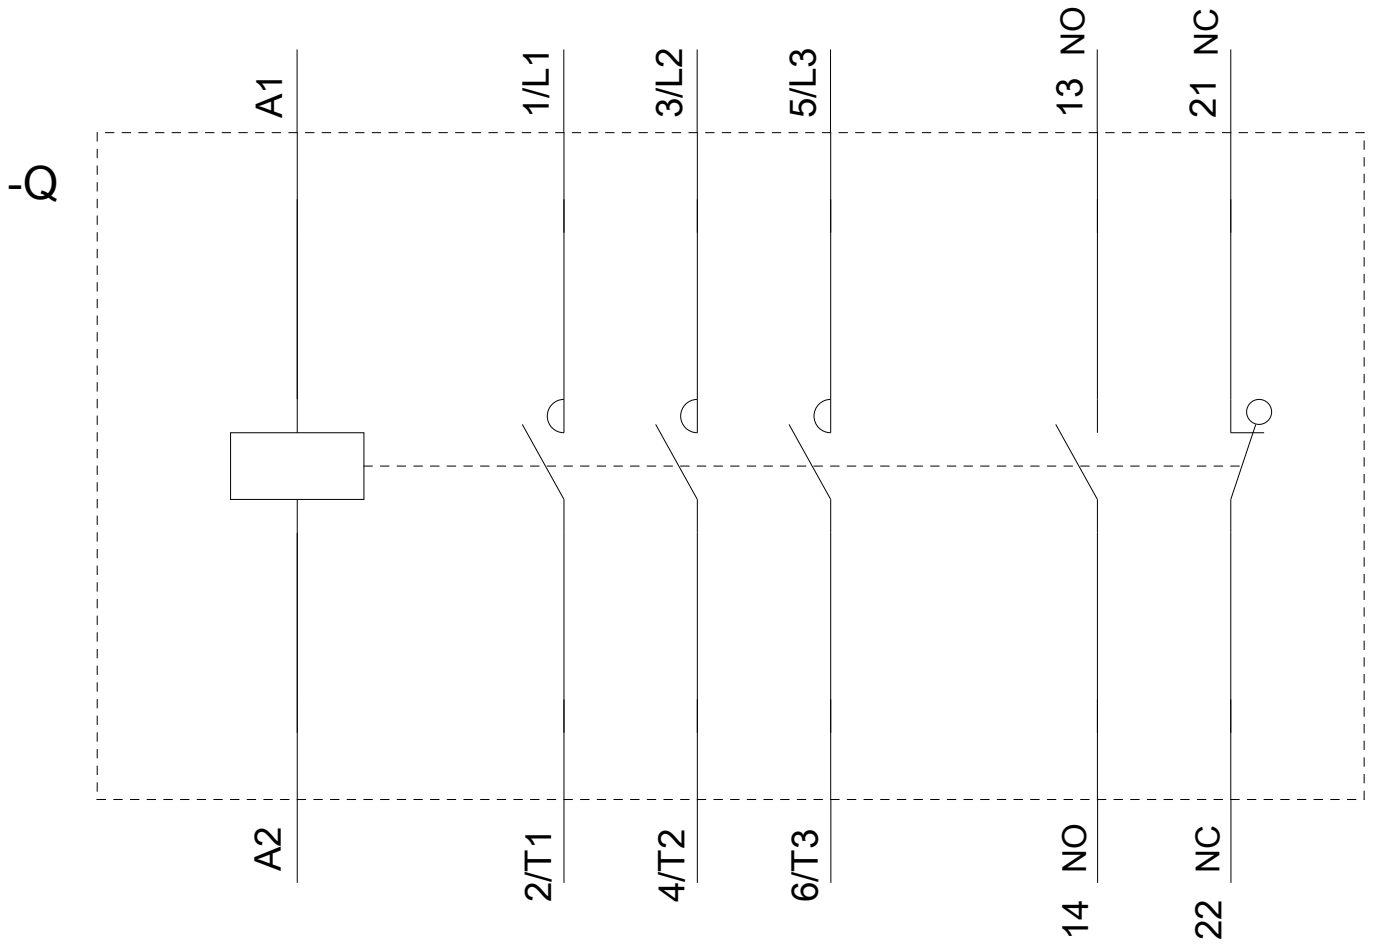

last modified:

09/08/2020