SIEMENS

Data sheet 3RU2116-0GB1

Overload relay 0.45...0.63 A Thermal For motor protection Size S00, Class 10 Stand-alone installation Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset



product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2

General technical data	
	200
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current	
 at AC in hot operating state 	4.8 W
 at AC in hot operating state per pole 	1.6 W
insulation voltage with degree of pollution 3 at AC	690 V
rated value	
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
 in networks with grounded star point between 	440 V
auxiliary and auxiliary circuit	
• in networks with grounded star point between	440 V
auxiliary and auxiliary circuit	
in networks with grounded star point between	440 V
main and auxiliary circuit	
-	

 in networks with grounded star point between main and auxiliary circuit 	440 V
protection class IP	
• on the front	IP20
• of the terminal	IP20
shock resistance	
• acc. to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code acc. to DIN EN 81346-2	F
Ambient conditions	
installation altitude at height above sea level	2 000 m
maximum	
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
 during transport 	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
Main circuit number of poles for main current circuit	3
	3 0.45 0.63 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release	
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage	0.45 0.63 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release	
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage	0.45 0.63 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value	0.45 0.63 A 690 V
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value	0.45 0.63 A 690 V 690 V
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3 • at 400 V rated value	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Auxiliary circuit	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A 0.18 kW 0.25 kW
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Auxiliary circuit design of the auxiliary switch	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A 0.18 kW 0.25 kW
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Auxiliary circuit	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A 0.18 kW 0.25 kW 0.25 kW
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A 0.18 kW 0.25 kW 0.25 kW
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A 0.18 kW 0.25 kW 0.25 kW
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note	0.45 0.63 A 690 V 50 60 Hz 0.63 A 0.18 kW 0.25 kW integrated 1 for contactor disconnection
number of poles for main current circuit adjustable pick-up value current of the current- dependent overload release operating voltage • rated value • at AC-3 rated value maximum operating frequency rated value operating current rated value operating power at AC-3 • at 400 V rated value • at 500 V rated value • at 690 V rated value Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts	0.45 0.63 A 690 V 690 V 50 60 Hz 0.63 A 0.18 kW 0.25 kW 0.25 kW integrated 1 for contactor disconnection 1

operating current of auxiliary contacts at AC-15	
• at 24 V	3 A
● at 110 V	3 A
● at 120 V	3 A
● at 125 V	3 A
● at 230 V	2 A
● at 400 V	1 A
operating current of auxiliary contacts at DC-13	
● at 24 V	2 A
● at 60 V	0.3 A
● at 110 V	0.22 A
● at 125 V	0.22 A
● at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal
UL/CSA ratings	
full-load current (FLA) for three-phase AC motor	
● at 480 V rated value	0.63 A
● at 600 V rated value	0.63 A
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the auxiliary switch required 	fuse gG: 6 A, quick: 10 A
Installation/ mounting/ dimensions	
mounting position	any
mounting type	stand-alone installation
height	89 mm
width	45 mm
depth	80 mm
Connections/ Terminals	
product function	
 removable terminal for auxiliary and control circuit 	No
type of electrical connection	
for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	


• for main contacts	
 single or multi-stranded 	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 at AWG conductors for main contacts 	2x (20 16), 2x (18 14), 2x 12
 type of connectable conductor cross-sections for auxiliary contacts 	
 single or multi-stranded 	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 type of connectable conductor cross-sections at AWG conductors for auxiliary contacts 	2x (20 16), 2x (18 14)
tightening torque	
• for main contacts with screw-type terminals	0.8 1.2 N·m
• for auxiliary contacts with screw-type terminals	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 6 mm
size of the screwdriver tip	Pozidriv PZ 2
design of the thread of the connection screw	
• for main contacts	M3
 of the auxiliary and control contacts 	M3

Safety related data	
failure rate [FIT]	
 with low demand rate acc. to SN 31920 	50 FIT
MTTF with high demand rate	2 280 y
T1 value for proof test interval or service life acc. to IEC 61508	20 y

Display	
display version	
 for switching status 	Slide switch

Certificates/ approvals

General Product Approval















IECEx

Declaration of Conformity

Test Certificates

Marine / Shipping



Miscellaneous

Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping

other











Confirmation

Railway

Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-0GB1

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-0GB1

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-0GB1


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) $\underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2116-0GB1\&lang=en}}$


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-0GB1/char


Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-0GB1&objecttype=14&gridview=view1



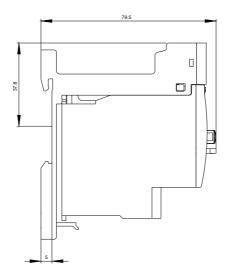

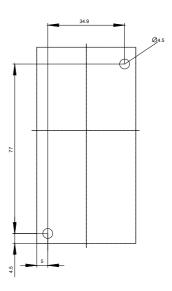

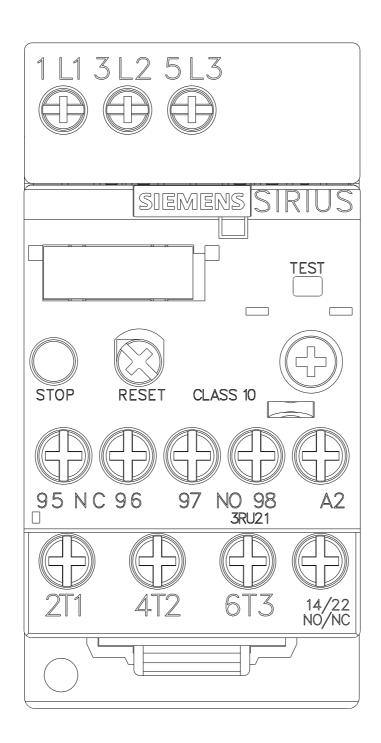

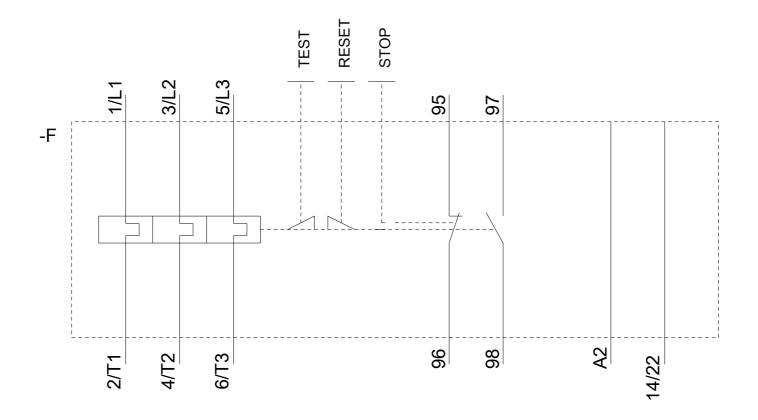

last modified: 09/25/2020