SIEMENS

Data sheet 3RF2320-1BA02



Solid-state contactor 1-phase 3RF2 AC 15 / 12 A / 40 $^{\circ}\text{C}$ 24-230 V / 24 V DC Instantaneous switching

product designation design of the product product type designation manufacturer's article number • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered • _2 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered • _2 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered ioad monitoring, basis General technical data product function instantaneous switching
manufacturer's article number • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered 3RF2920-0HA13 • _3 of the accessories that can be ordered 3RF2900-0EA18 • _4 of the accessories that can be ordered 3RF2920-0GA13 • _5 of the accessories that can be ordered product designation • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered o _5 of the accessories that can be ordered ioad monitoring ordered ioad monitoring, basis General technical data product function instantaneous switching
manufacturer's article number • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered 3RF2920-0HA13 • _3 of the accessories that can be ordered 3RF2900-0EA18 • _4 of the accessories that can be ordered 3RF2920-0GA13 • _5 of the accessories that can be ordered 3RF2920-0FA08 product designation • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered • _5 of the accessories that can be ordered ioad monitoring odd monitoring, basis General technical data product function instantaneous switching
 _ 1 of the accessories that can be ordered _ 2 of the accessories that can be ordered _ 3 of the accessories that can be ordered _ 4 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 1 of the accessories that can be ordered _ 2 of the accessories that can be ordered _ 3 of the accessories that can be ordered _ 3 of the accessories that can be ordered _ 3 of the accessories that can be ordered _ 4 of the accessories that can be ordered _ 4 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 6 ordered _ 6 ordered _ 7 ordered _ 8 ordered _ 9 ordered _ 9
 _2 of the accessories that can be ordered _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered _5 of the accessories that can be ordered _1 of the accessories that can be ordered _2 of the accessories that can be ordered _3 of the accessories that can be ordered _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered _6 of the accessories that can be ordered <
 _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered _7 of the accessories that can be ordered _1 of the accessories that can be ordered _2 of the accessories that can be ordered _3 of the accessories that can be ordered _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered _6 ordered _7 ordered _8 ordered _9 ordered _9
 _4 of the accessories that can be ordered _5 of the accessories that can be ordered _7 of the accessories that can be ordered _4 of the accessories that can be ordered _2 of the accessories that can be ordered _3 of the accessories that can be ordered _4 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered _5 of the accessories that can be ordered _6 of the accessories that can be ordered _6 of the accessories that can be ordered _6 ordered _7 ordered _8 ordered _9 or
_ 5 of the accessories that can be ordered product designation _ 1 of the accessories that can be ordered _ 2 of the accessories that can be ordered _ 3 of the accessories that can be ordered _ 4 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 5 of the accessories that can be ordered _ 6 ordered _ 5 of the accessories that can be ordered _ 6 ordered _ 6 ordered _ 7 ordered _ 8 ordered _ 9 ordered _
product designation • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered _5 of the accessories that can be ordered _6 of the accessories that can be orde
 _1 of the accessories that can be ordered _2 of the accessories that can be ordered _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered _5 of the accessories that can be ordered _6 ordered _7 ordered _8 ordered _9 ordered<
 _2 of the accessories that can be ordered _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered _6 of the accessories that can be ordered _6 ordered _7 of the accessories that can be ordered _8 ordered _9 ordered <li< th=""></li<>
 _3 of the accessories that can be ordered _4 of the accessories that can be ordered _5 of the accessories that can be ordered _6 of the accessories that can be ordered _6 ordered _7 or the accessories that can be ordered _8 ordered _9 ord
 _4 of the accessories that can be ordered _5 of the accessories that can be ordered load monitoring, basis General technical data product function instantaneous switching
• _5 of the accessories that can be ordered load monitoring, basis General technical data product function instantaneous switching
General technical data product function instantaneous switching
product function instantaneous switching
<u>, </u>
power loss [W] for rated value of the current at AC in hot 20 W
operating state
• per pole 20 W
power loss [W] for rated value of the current without load current share typical 0.4 W
insulation voltage rated value 600 V
degree of pollution 3
type of voltage of the control supply voltage DC
surge voltage resistance of main circuit rated value 6 kV
shock resistance acc. to IEC 60068-2-27 15g / 11 ms
vibration resistance acc. to IEC 60068-2-6 2g
reference code acc. to IEC 81346-2
Substance Prohibitance (Date) 28.05.2009 00:00:00
Main circuit
number of poles for main current circuit 1
number of NO contacts for main contacts 1
number of NC contacts for main contacts 0
operating voltage at AC
• at 50 Hz rated value 24 230 V
• at 60 Hz rated value 24 230 V

operating frequency rated value	50 60 Hz
operating range relative to the operating voltage at AC	00 00 Fiz
• at 50 Hz	20 253 V
• at 60 Hz	20 253 V
operational current	20 200 V
at AC-51 rated value	20 A
• at AC-51 rated value • at AC-51 acc. to IEC 60947-4-3	13.2 A
• acc. to UL 508 rated value	13.2 A 12 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts	1 000 V/µs
maximum permissible	1 000 V/μ5
blocking voltage at the thyristor for main contacts maximum permissible	800 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I2t value maximum	1 800 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
at DC rated value	30 V
• at DC	15 24 V
control supply voltage	
at DC initial value for signal <1> detection	15 V
• at DC full-scale value for signal<0> recognition	5 V
control current at minimum control supply voltage	
• at DC	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms
OFF-delay time	1 ms; additionally max. one half-wave
	.,
Auxiliary Circuit	
Auxiliary circuit number of NC contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	0 0 0
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions	0 0
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method • side-by-side mounting	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts lnstallation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts lnstallation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o o screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o o screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	o screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10)
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts Installation/ mounting/ dimensions fastening method	0 0 screw and snap-on mounting onto 35 mm standard mounting rail Yes 95 mm 22.5 mm 120 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm²

-+ 0.000	4 (A)A(O, OO
at AWG cables for auxiliary and control contacts	1x (AWG 20 12)
AWG number as coded connectable conductor cross section for main contacts	10 14
tightening torque	2 25N m
for main contacts with screw-type terminals	2 2.5 N·m
 for auxiliary and control contacts with screw-type terminals 	0.5 0.6 N·m
tightening torque [lbf·in]	
 for main contacts with screw-type terminals 	18 22 lbf·in
 for auxiliary and control contacts with screw-type terminals 	4.5 5.3 lbf·in
design of the thread of the connection screw	
 for main contacts 	M4
 of the auxiliary and control contacts 	M3
stripped length of the cable	
• for main contacts	7 mm
 for auxiliary and control contacts 	7 mm
Safety related data	
protection class IP on the front acc. to IEC 60529	IP20
· .	
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
Electromagnetic compatibility	
conducted interference	
 due to burst acc. to IEC 61000-4-4 	2 kV / 5 kHz behavior criterion 2
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV behavior criterion 2
due to conductor-conductor surge acc. to IEC	1 kV behavior criterion 2
61000-4-5	TRY Beliavior differiori 2
 due to high-frequency radiation acc. to IEC 61000- 4-6 	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
field-based interference acc. to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions acc. to CISPR11	Class A for industrial environment
field-bound HF interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments
Short-circuit protection, design of the fuse link	
manufacturer's article number	
of gS fuse for semiconductor protection at NH design usable	3NE1814-0
 of full range R fuse link for semiconductor protection at cylindrical design usable 	<u>5SE1325</u>
 of back-up R fuse link for semiconductor protection at NH design usable 	3NE8015-1
 of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable 	3NC1032
 of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable 	3NC1450
 of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable 	3NC2263
manufacturer's article number of the gG fuse	
at NH design usable	3NA6807
at cylindrical design 10 x 38 mm usable	3NW6007-1
at cylindrical design 14 x 51 mm usable	3NW6107-1
• at cylindrical design 22 x 58 mm usable	3NW6207-1: These fuses have a smaller rated current than the semiconductor relays
manufacturer's article number	
 of DIAZED fuse usable 	<u>5SB171</u>
 of NEOZED fuse usable 	5SE2320

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity

Test Certificates











Type Test Certificates/Test Report

Test Certificates

other

Railway

Special Test Certificate

Confirmation



Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2320-1BA02

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2320-1BA02


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF2320-1BA02


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2320-1BA02&lang=en

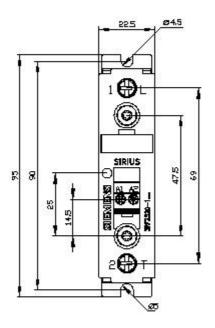

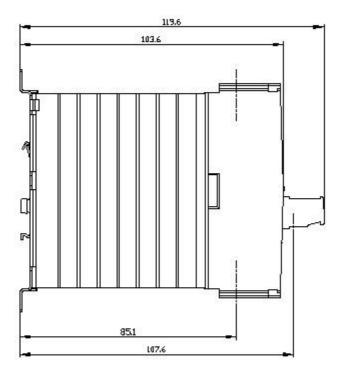

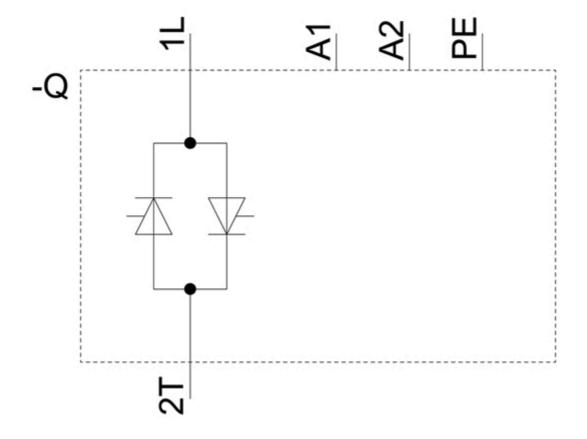

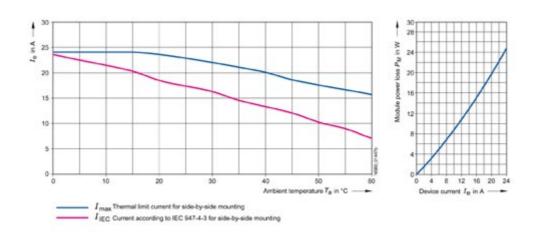

last modified: 5/6/2021 🖸