SIEMENS

Data sheet 3RW3003-1CB54



SIRIUS soft starter 22.5mm 3 A, 1.1 kW/400 V, 40 $^{\circ}\text{C}$ 200-400 V AC, 24-230 V AC/DC Screw terminals

General technical data				
product brand name		SIRIUS		
product feature				
 integrated bypass contact system 		No		
thyristors		Yes		
product function				
 intrinsic device protection 		No		
 motor overload protection 		No		
 evaluation of thermistor motor protection 		No		
 external reset 		No		
 adjustable current limitation 		No		
• inside-delta circuit		No		
product component motor brake output		No		
insulation voltage rated value	V	600		
degree of pollution		3, acc. to IEC 60947-4-2		
reference code acc. to DIN EN 61346-2		Q		
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G		
Power Electronics				
product designation		Soft starter		
operational current				
 at 40 °C rated value 	Α	3		
 at 50 °C rated value 	Α	2.6		
at 60 °C rated value	A	2.2		
yielded mechanical performance for 3-phase motors				
• at 230 V				
 — at standard circuit at 40 °C rated value 	W	550		
• at 400 V				
— at standard circuit at 40 °C rated value	W	1 100		
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	0.5		
operating frequency rated value	Hz	50 60		
relative negative tolerance of the operating frequency	%	-10		
relative positive tolerance of the operating frequency	%	10		
operating voltage at standard circuit rated value	V	200 400		
relative negative tolerance of the operating voltage at standard circuit	%	-10		
relative positive tolerance of the operating voltage at	%	10		

standard circuit	24	
minimum load [%]	%	9
continuous operating current [% of le] at 40 °C	%	100
power loss [W] at operational current at 40 °C during operation typical	W	6.5
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
control supply voltage 1 at AC at 50 Hz	V	24 230
control supply voltage 1 at AC at 60 Hz	V	24 230
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-10
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	10
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-10
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
control supply voltage 1 at DC	V	24 230
relative negative tolerance of the control supply voltage at DC	%	-10
relative positive tolerance of the control supply voltage at DC	%	10
Mechanical data		
width	mm	22.5
height	mm	102
depth	mm	123
fastening method		screw and snap-on mounting
mounting position		With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front and back
wire length maximum	m	100
number of poles for main current circuit		3
Connections/ Terminals		
type of electrical connection		
type of electrical confliction		
for main current circuit		screw-type terminals
		screw-type terminals screw-type terminals
for main current circuit		· · · · · · · · · · · · · · · · · · ·
for main current circuit for auxiliary and control circuit		screw-type terminals
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts		screw-type terminals
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for		screw-type terminals 0 0
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts solid		screw-type terminals 0 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²)
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²)
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²)
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²)
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²)
for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 4 mm², 2x (0.5 1.5 mm²)
for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²)
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts		screw-type terminals 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 2x (20 14)
for main current circuit for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts	m	screw-type terminals 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 2x (20 14)
for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts	m	screw-type terminals 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 0.5 2 mm², 2x (0.5 1.5 mm²) 2.5 2.5 mm², 2x (0.5 1.5 mm²) 2.5 2.5 mm², 2x (0.5 1.5 mm²)
for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts	m	screw-type terminals 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 0.5 2 mm², 2x (0.5 1.5 mm²) 2.5 2.5 mm², 2x (0.5 1.5 mm²) 2.5 2.5 mm², 2x (0.5 1.5 mm²)
for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts • solid	m	screw-type terminals 0 0 0 0 0.5 4 mm², 2x (0.5 2.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 0.5 2.5 mm², 2x (0.5 1.5 mm²) 2x (20 14) 2x (20 14) 5 000

ambient temperature		
 during operation 	°C	-25 +60
during storage	°C	-40 +80
derating temperature	°C	40
protection class IP on the front acc. to IEC 60529		IP20
touch protection on the front acc. to IEC 60529		finger-safe, for vertical contact from the front

Certificates/ approvals

General Product Approval EMC Declaration of Conformity Test Certificates











Type Test Certificates/Test Report

Test Certificates

other

Special Test Certificate

Confirmation

UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 220/230 V		
 at standard circuit at 50 °C rated value 	hp	0.5
contact rating of auxiliary contacts according to UL		B300 / R300
Further information		

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW3003-1CB54


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW3003-1CB54


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW3003-1CB54

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW3003-1CB54&lang=en

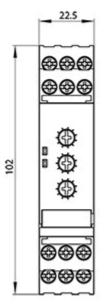

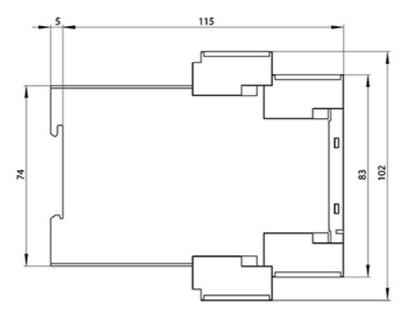

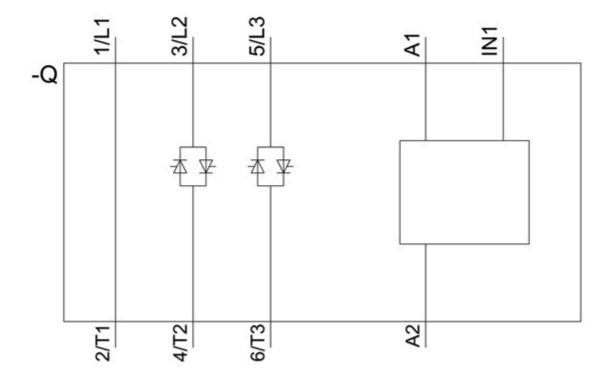

last modified: 12/15/2020 🖸