









Overload relay 1...4 A Electronic For motor protection Size S0, Class 10E  
 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-  
 Automatic-Reset

<b>product brand name</b>	SIRIUS
<b>product designation</b>	solid-state overload relay
<b>product type designation</b>	3RB3
<b>General technical data</b>	
<b>size of overload relay</b>	S0
<b>size of contactor can be combined company-specific</b>	S0
power loss [W] for rated value of the current at AC in hot operating state	0.1 W
• per pole	0.03 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
<b>surge voltage resistance rated value</b>	6 kV
<b>maximum permissible voltage for safe isolation in networks with grounded star point</b>	
• between auxiliary and auxiliary circuit	300 V
• between auxiliary and auxiliary circuit	300 V
• between main and auxiliary circuit	600 V
• between main and auxiliary circuit	690 V
<b>shock resistance</b>	15g / 11 ms
• acc. to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms
<b>vibration resistance</b>	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s <sup>2</sup> ; 10 cycles
<b>thermal current</b>	4 A
<b>recovery time after overload trip</b>	
• with automatic reset typical	3 min
• with remote-reset	0 min
• with manual reset	0 min
<b>type of protection according to ATEX directive 2014/34/EU</b>	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001
<b>reference code acc. to IEC 81346-2</b>	F
Substance Prohibance (Date)	01.10.2009 00:00:00
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
<b>temperature compensation</b>	-25 ... +60 °C

relative humidity during operation	10 ... 95 %
<b>Main circuit</b>	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	1 ... 4 A
operating voltage <ul style="list-style-type: none"> <li>rated value</li> <li>at AC-3 rated value maximum</li> </ul>	690 V 690 V
operating frequency rated value	50 ... 60 Hz
operational current rated value	4 A
operating power <ul style="list-style-type: none"> <li>for 3-phase motors at 400 V at 50 Hz</li> <li>for AC motors at 500 V at 50 Hz</li> <li>for AC motors at 690 V at 50 Hz</li> </ul>	0.37 ... 1.5 kW 0.37 ... 2.2 kW 0.55 ... 3 kW
<b>Auxiliary circuit</b>	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts <ul style="list-style-type: none"> <li>note</li> </ul>	1 for contactor disconnection
number of NO contacts for auxiliary contacts <ul style="list-style-type: none"> <li>note</li> </ul>	1 for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15 <ul style="list-style-type: none"> <li>at 24 V</li> <li>at 110 V</li> <li>at 120 V</li> <li>at 125 V</li> <li>at 230 V</li> </ul>	4 A 4 A 4 A 4 A 3 A
operational current of auxiliary contacts at DC-13 <ul style="list-style-type: none"> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul>	2 A 0.55 A 0.3 A 0.3 A 0.11 A
<b>Protective and monitoring functions</b>	
trip class	CLASS 10E
design of the overload release	electronic
<b>UL/CSA ratings</b>	
full-load current (FLA) for 3-phase AC motor <ul style="list-style-type: none"> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul>	4 A 4 A
contact rating of auxiliary contacts according to UL	B600 / R300
<b>Short-circuit protection</b>	
design of the fuse link <ul style="list-style-type: none"> <li>for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> </ul> </li> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A
<b>Installation/ mounting/ dimensions</b>	
mounting position	any
fastening method	Contactor mounting
height	87 mm
width	45 mm
depth	84 mm
<b>Connections/ Terminals</b>	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	

<ul style="list-style-type: none"><li>• for main current circuit</li><li>• for auxiliary and control circuit</li></ul>	screw-type terminals	
<b>arrangement of electrical connectors for main current circuit</b>	screw-type terminals	
<b>type of connectable conductor cross-sections</b>	Top and bottom	
<ul style="list-style-type: none"><li>• for main contacts<ul style="list-style-type: none"><li>— solid</li><li>— stranded</li><li>— solid or stranded</li><li>— finely stranded with core end processing</li></ul></li><li>• at AWG cables for main contacts</li></ul>	2x (1 ... 2.5 mm²), 2x (2.5 ... 10 mm²) 2x 10 mm² 1x (1 ... 10 mm²), 2x (1 ... 10 mm²) 1x (1 ... 6 mm²), 2 x (1 ... 6 mm²), 1x 10 mm² 1x (16 ... 8), 2x (16 ... 8)	
<b>type of connectable conductor cross-sections</b>		
<ul style="list-style-type: none"><li>• for auxiliary contacts<ul style="list-style-type: none"><li>— solid</li><li>— solid or stranded</li><li>— finely stranded with core end processing</li></ul></li><li>• at AWG cables for auxiliary contacts</li></ul>	1x (0.5 ... 4 mm²), 2x (0.5 ... 2.5 mm²) 1x (0,5 ... 4 mm²), 2x (0,5 ... 2,5 mm²) 1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²) 1x (20 ... 14), 2x (20 ... 14)	
<b>tightening torque</b>		
<ul style="list-style-type: none"><li>• for main contacts with screw-type terminals</li><li>• for auxiliary contacts with screw-type terminals</li></ul>	2 ... 2.5 N·m 0.8 ... 1.2 N·m	
<b>design of screwdriver shaft</b>	Diameter 5 to 6 mm	
<b>size of the screwdriver tip</b>	Pozidriv PZ 2	
<b>design of the thread of the connection screw</b>		
<ul style="list-style-type: none"><li>• for main contacts</li><li>• of the auxiliary and control contacts</li></ul>	M4 M3	
<b>Safety related data</b>		
<b>protection class IP on the front acc. to IEC 60529</b>	IP20	
<b>touch protection on the front acc. to IEC 60529</b>	finger-safe, for vertical contact from the front	
<b>Communication/ Protocol</b>		
<b>type of voltage supply via input/output link master</b>	No	
<b>Electromagnetic compatibility</b>		
<b>conducted interference</b>		
<ul style="list-style-type: none"><li>• due to burst acc. to IEC 61000-4-4</li></ul>	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3	
<ul style="list-style-type: none"><li>• due to conductor-earth surge acc. to IEC 61000-4-5</li><li>• due to conductor-conductor surge acc. to IEC 61000-4-5</li></ul>	2 kV (line to earth) corresponds to degree of severity 3 1 kV (line to line) corresponds to degree of severity 3	
<ul style="list-style-type: none"><li>• due to high-frequency radiation acc. to IEC 61000-4-6</li></ul>	10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz	
<b>field-based interference acc. to IEC 61000-4-3</b>	10 V/m	
<b>electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge	
<b>Display</b>		
display version for switching status	Slide switch	
<b>Certificates/ approvals</b>		
<b>General Product Approval</b>		
EMC		
For use in hazardous locations		
<div><div> CSA</div><div> CCC</div><div> UL</div><div></div><div> RCM</div><div> ATEX</div></div>		
<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>Marine / Shipping</b>



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



## Marine / Shipping

other



[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3026-1PB0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3026-1PB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-1PB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB3026-1PB0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3026-1PB0&lang=en)


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-1PB0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3026-1PB0&objecttype=14&gridview=view1>

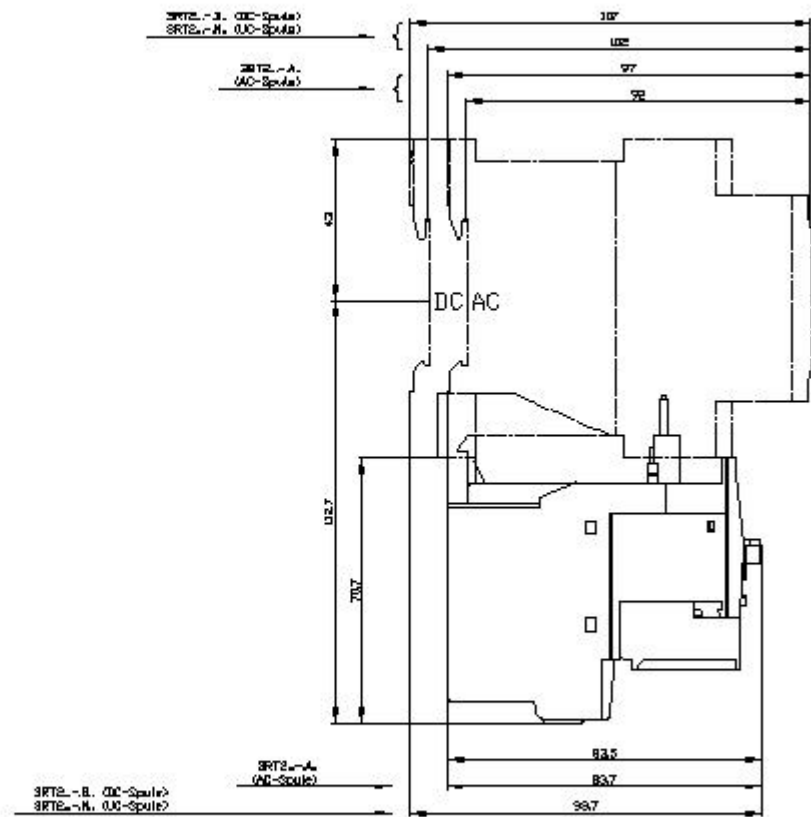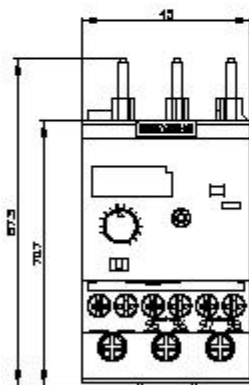

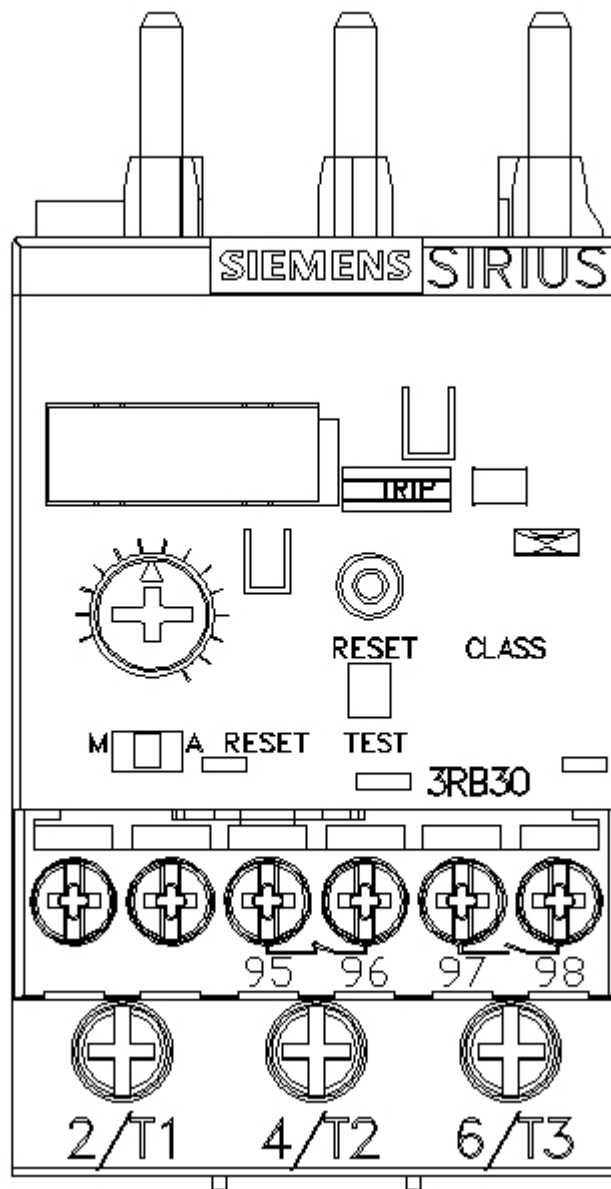

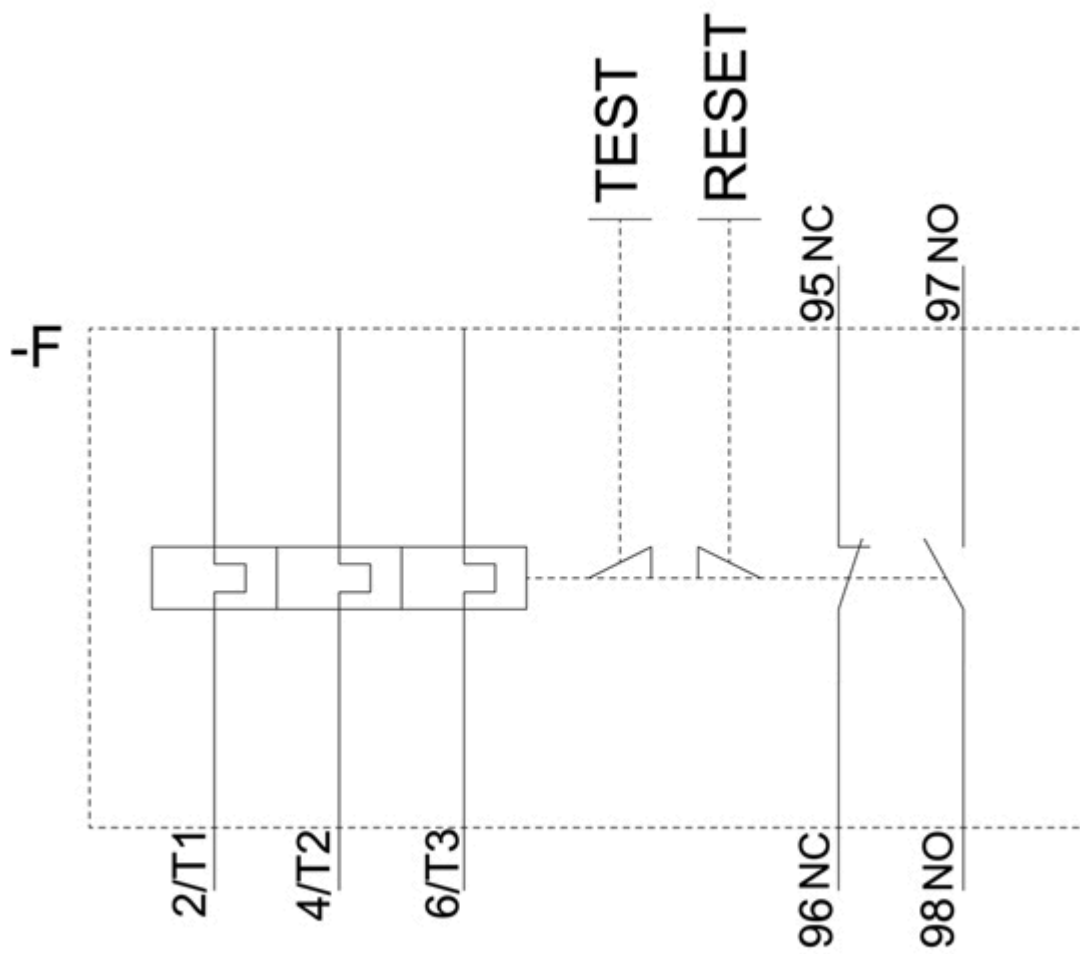

last modified:

12/15/2020 [🔗](#)