SIEMENS

Data sheet for SINAMICS V20

Figure similar

MLFB-Ordering data **6SL3210-5BE24-0UV0**

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data

Input

Number of phases	3 AC
Line voltage	380 ... 480 V -15 % +10 %
Line frequency	47 ... 63 Hz

Output

Number of phases	3 AC
Rated voltage	400 V
Rated power (HO)	4.00 kW / 5.00 hp
Rated power (LO)	4.00 kW / 5.00 hp
Rated current (HO)	8.80 A
Rated current (LO)	8.80 A
Rated current (HO) at 480V	8.20 A
Rated current (LO) at 480V	8.20 A
Pulse frequency	4.00 kHz
Output frequency	0 ... 550 Hz

General tech. specifications

Power factor λ	0.72
Offset factor cos φ	0.95
Efficiency η	0.98
Filter class (integrated)	Unfiltered

Ambient conditions

Cooling	External fan
Installation altitude	1000 m (3281 ft)

Ambient temperature

Operation	-10 ... 60 °C (14 ... 140 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

Relative humidity

Max. operation	95 %

Communication

Communication	USS, Modbus RTU

Standards

Compliance with standards	CE, cULus, C-Tick (RCM), KC
CE marking	EN 61800-5-1 /EN 60204-1 and EN 61800-3

Overload capability

Low Overload (LO)

110 % rated output current for 60 s, cycle time 300 s

High Overload (HO)

150 % rated output current for 60 s, cycle time 300 s

SIEMENS

Data sheet for SINAMICS V20

MLFB-Ordering data **6SL3210-5BE24-0UV0**

Figure similar

Mechanical data

Mounting position	Through-hole mounting / wall mounting / side-by-side mounting
Degree of protection	IP20 / UL open type
Size	FSB
Net weight	1.60 kg (3.53 lb)
Width	140.0 mm (5.51 in)
Height	160.0 mm (6.30 in)
Depth	164.5 mm (6.48 in)

Inputs / outputs

Standard digital inputs

Number	4

Digital outputs

Number as relay changeover contact	1
Number as transistor	1

Analog inputs

Number	2 (Can be used as additional digital input)

Analog outputs

Number	1

Connections

Max. motor cable length

Shielded	25 m (82 ft)
Unshielded	50 m (164 ft)

Converter losses to IEC61800-9-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	32.90 %

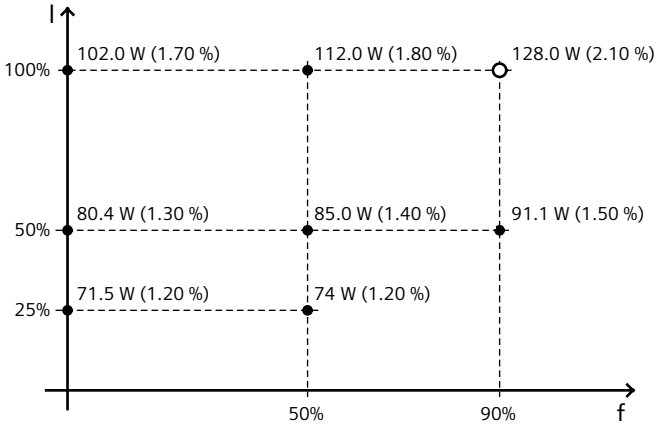

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values