SIEMENS

Data sheet 3RU2126-4PB0



Overload relay 30...36 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S0
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	9.6 W
• per pole	3.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
between main and auxiliary circuit	440 V
shock resistance acc. to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code acc. to IEC 81346-2	F
Substance Prohibitance (Date)	01.10.2009 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-40 +70 °C
 during storage 	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	30 36 A
operating voltage	
rated value	690 V

at AC-3 rated value maximum	690 V	
operating frequency rated value	50 60 Hz	
operational current rated value	36 A	
operating power at AC-3		
 at 400 V rated value 	18.5 kW	
 at 500 V rated value 	22 kW	
 at 690 V rated value 	30 kW	
Auxiliary circuit		
design of the auxiliary switch	integrated	
number of NC contacts for auxiliary contacts	1	
• note	for contactor disconnection	
number of NO contacts for auxiliary contacts	1	
• note	for message "Tripped"	
number of CO contacts for auxiliary contacts	0	
operational current of auxiliary contacts at AC-15	Ü	
• at 24 V	3 A	
• at 110 V	3 A	
	3 A	
• at 120 V		
• at 125 V	3 A	
• at 230 V	2 A	
• at 400 V	1 A	
operational current of auxiliary contacts at DC-13		
● at 24 V	2 A	
• at 60 V	0.3 A	
● at 110 V	0.22 A	
• at 125 V	0.22 A	
• at 220 V	0.11 A	
contact rating of auxiliary contacts according to UL	B600 / R300	
Protective and monitoring functions		
trip class	CLASS 10	
	the area of	
design of the overload release	thermal	
	tnermai	
UL/CSA ratings	tnermai	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor		
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	36 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value		
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	36 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	36 A 36 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch	36 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	36 A 36 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	36 A 36 A fuse gG: 6 A, quick: 10 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	36 A 36 A fuse gG: 6 A, quick: 10 A	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit	36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom 2x (1 2,5 mm²), 2x (2,5 10 mm²)	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	36 A 36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom	

type of connectable conductor cross-sections	
 for auxiliary contacts 	
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 at AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)
tightening torque	
 for main contacts with screw-type terminals 	2 2.5 N·m
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 6 mm
size of the screwdriver tip	Pozidriv PZ 2
design of the thread of the connection screw	
 for main contacts 	M4
 of the auxiliary and control contacts 	M3
Safety related data	
failure rate [FIT] with low demand rate acc. to SN 31920	50 FIT
MTTF with high demand rate	2 280 y
T1 value for proof test interval or service life acc. to IEC 61508	20 y
protection class IP on the front acc. to IEC 60529	IP20
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Slide switch
Certificates/ approvals	

Œ

General Product Approval









For use in hazardous locations



Declaration of Conformity

Test Certificates

Marine / Shipping



Type Test Certificates/Test Report

Special Test Certificate







Marine / Shipping

other Railway









Confirmation

Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-4PB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-4PB0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4PB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-4PB0&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4PB0/char

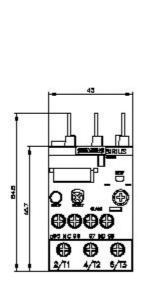

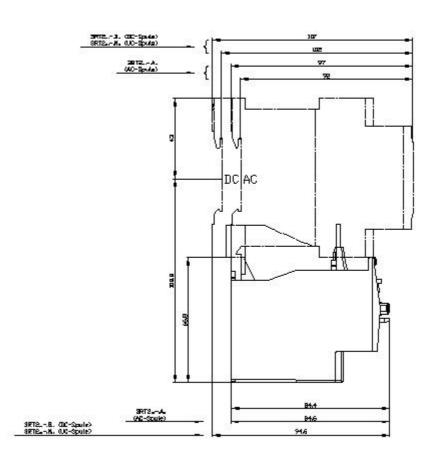

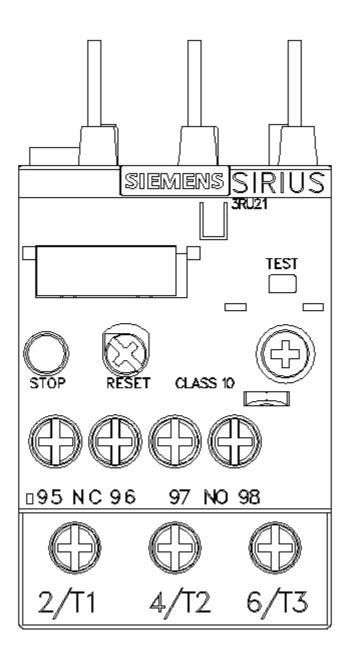

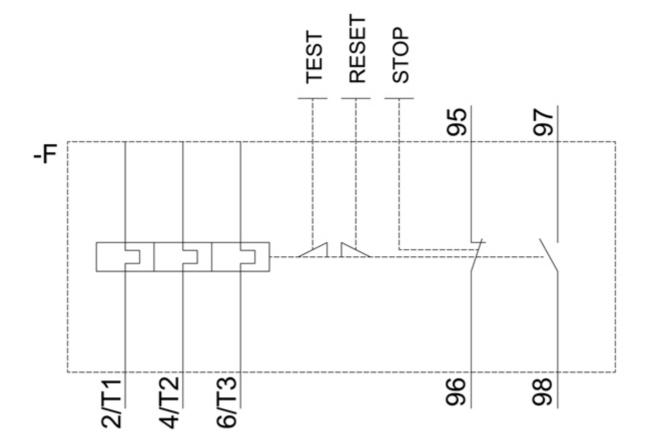

last modified: 12/15/2020 🖸