SIEMENS

Data sheet 3RF2340-1AA02



Solid-state contactor 1-phase 3RF2 AC 51 / 40 A / 40 $^{\circ}\text{C}$ 24-230 V / 24 V DC screw terminal

| product brand name | SIRIUS |
|--|-----------------------|
| product designation | solid-state contactor |
| design of the product | single-phase |
| product type designation | 3RF23 |
| manufacturer's article number | |
| _1 of the accessories that can be ordered | 3RF2900-3PA88 |
| _3 of the accessories that can be ordered | 3RF2900-0EA18 |
| _4 of the accessories that can be ordered | 3RF2950-0GA13 |
| product designation | |
| _1 of the accessories that can be ordered | terminal cover |
| _3 of the accessories that can be ordered | converter |
| _4 of the accessories that can be ordered | load monitoring |
| General technical data | |
| product function | zero-point switching |
| power loss [W] for rated value of the current at AC in hot operating state | 44 W |
| • per pole | 44 W |
| power loss [W] for rated value of the current without load current share typical | 0.4 W |
| insulation voltage rated value | 600 V |
| degree of pollution | 3 |
| type of voltage of the control supply voltage | DC |
| surge voltage resistance of main circuit rated value | 6 kV |
| shock resistance acc. to IEC 60068-2-27 | 15g / 11 ms |
| vibration resistance acc. to IEC 60068-2-6 | 2g |
| reference code acc. to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 01.07.2006 00:00:00 |
| Main circuit | |
| number of poles for main current circuit | 1 |
| number of NO contacts for main contacts | 1 |
| number of NC contacts for main contacts | 0 |
| operating voltage at AC | |
| • at 50 Hz rated value | 24 230 V |
| at 60 Hz rated value | 24 230 V |
| operating frequency rated value | 50 60 Hz |
| operating range relative to the operating voltage at AC | |
| ● at 50 Hz | 20 253 V |
| • at 60 Hz | 20 253 V |

| operational current | | |
|--|--|--|
| at AC-51 rated value | 40 A | |
| at AC-51 acc. to IEC 60947-4-3 | 33 A | |
| acc. to UL 508 rated value | 36 A | |
| operational current minimum | 500 mA | |
| rate of voltage rise at the thyristor for main contacts maximum permissible | 1 000 V/µs | |
| blocking voltage at the thyristor for main contacts maximum permissible | 800 V | |
| reverse current of the thyristor | 10 mA | |
| derating temperature | 40 °C | |
| surge current resistance rated value | 1 200 A | |
| I2t value maximum | 7 200 A ² ·s | |
| Control circuit/ Control | | |
| type of voltage of the control supply voltage | DC | |
| control supply voltage 1 | | |
| at DC rated value | 30 V | |
| • at DC | 15 24 V | |
| control supply voltage | | |
| at DC initial value for signal <1> detection | 15 V | |
| at DC full-scale value for signal<0> recognition | 5 V | |
| control current at minimum control supply voltage | | |
| • at DC | 13 mA | |
| control current at DC rated value | 15 mA | |
| ON-delay time | 1 ms; additionally max. one half-wave | |
| OFF-delay time | 1 ms; additionally max. one half-wave | |
| Auxiliary circuit | | |
| number of NC contacts for auxiliary contacts | 0 | |
| number of NO contacts for auxiliary contacts | 0 | |
| number of CO contacts for auxiliary contacts | 0 | |
| | | |
| Installation/ mounting/ dimensions | | |
| Installation/ mounting/ dimensions | screw and snap-on mounting onto 35 mm standard mounting rail | |
| fastening method | screw and snap-on mounting onto 35 mm standard mounting rail Yes | |
| fastening method • side-by-side mounting | Yes | |
| fastening method • side-by-side mounting height | Yes 100 mm | |
| fastening method | Yes 100 mm 67 mm | |
| fastening method • side-by-side mounting height width depth | Yes 100 mm | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals | Yes 100 mm 67 mm | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection | Yes 100 mm 67 mm 141 mm | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit | Yes 100 mm 67 mm 141 mm | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections | Yes 100 mm 67 mm 141 mm screw-type terminals | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded • finely stranded with core end processing | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | |
| fastening method | Yes 100 mm 67 mm 141 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | |

| for auxiliary and control contacts with screw-type terminals | 0.5 0.6 N·m | |
|---|--|--|
| tightening torque [lbf·in] | | |
| for main contacts with screw-type terminals | 18 22 lbf·in | |
| for auxiliary and control contacts with screw-type terminals | 4.5 5.3 lbf·in | |
| design of the thread of the connection screw | | |
| for main contacts | M4 | |
| of the auxiliary and control contacts | M3 | |
| stripped length of the cable | | |
| for main contacts | 7 mm | |
| for auxiliary and control contacts | 7 mm | |
| Safety related data | | |
| protection class IP on the front acc. to IEC 60529 | IP20 | |
| touch protection on the front acc. to IEC 60529 | finger-safe, for vertical conta | act from the front |
| Ambient conditions | | |
| installation altitude at height above sea level maximum | 1 000 m | |
| ambient temperature | | |
| during operation | -25 +60 °C | |
| during storage | -55 +80 °C | |
| Electromagnetic compatibility | | |
| conducted interference | | |
| due to burst acc. to IEC 61000-4-4 | 2 kV / 5 kHz behavior criteri | on 2 |
| • due to conductor-earth surge acc. to IEC 61000-4-5 | 2 kV behavior criterion 2 | 011 2 |
| due to conductor-conductor surge acc. to IEC | 1 kV behavior criterion 2 | |
| 61000-4-5 | | one of the contract of the con |
| • due to high-frequency radiation acc. to IEC 61000- 4-6 | | range 0.15 80 MHz, behavior criterion 1 |
| field-based interference acc. to IEC 61000-4-3 | 80 MHz 1 GHz 10 V/m, b | |
| electrostatic discharge acc. to IEC 61000-4-2 | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 | |
| conducted HF interference emissions acc. to CISPR11 | Class A for industrial enviro | |
| field-bound HF interference emission acc. to CISPR11 | Class B for the domestic, bu | usiness and commercial environments |
| Short-circuit protection, design of the fuse link | | |
| manufacturer's article number | | |
| of gS fuse for semiconductor protection at NH design usable | 3NE1802-0 | |
| of full range R fuse link for semiconductor protection at cylindrical design usable | <u>5SE1350</u> | |
| of back-up R fuse link for semiconductor protection at NH design usable | 3NE8017-1 | |
| of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable | 3NC1450 | |
| of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable | 3NC2200 | |
| manufacturer's article number of the gG fuse | | |
| at NH design usable | 3NA6817 | |
| • at cylindrical design 14 x 51 mm usable | 3NW6117-1 | |
| at cylindrical design 22 x 58 mm usable | 3NW6217-1 | |
| manufacturer's article number | | |
| • of DIAZED fuse usable | 5SB4111: These fuses have semiconductor relays | e a smaller rated current than the |
| • of NEOZED fuse usable | The state of the s | e a smaller rated current than the |
| Certificates/ approvals | | |
| General Product Approval | EMC | Declaration of Conformity |
| General Froduct Approval | LIVIO | Deciaration of Comorning |











Miscellaneous

| Test Certificates | | other | Railway |
|---------------------|------------------------|--------------|---------------------|
| Type Test Certific- | Special Test Certific- | Confirmation | Vibration and Shock |

Further information

ates/Test Report

Information- and Downloadcenter (Catalogs, Brochures,...)

<u>ate</u>

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2340-1AA02


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2340-1AA02


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF2340-1AA02

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2340-1AA02&lang=en

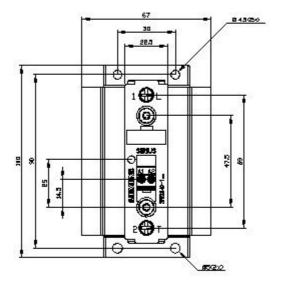

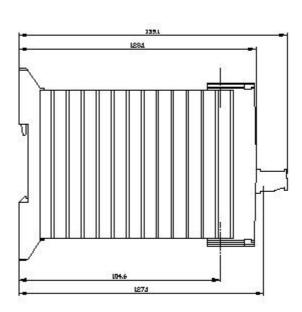

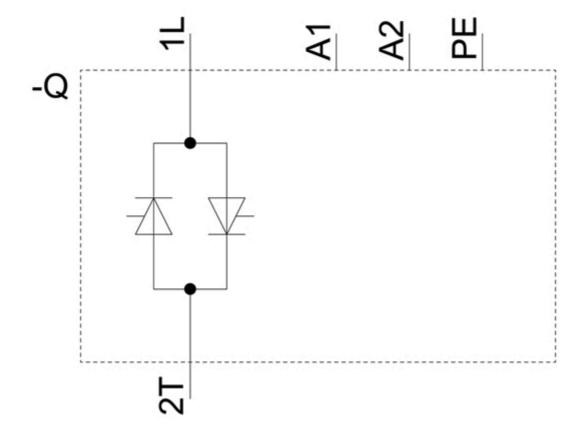

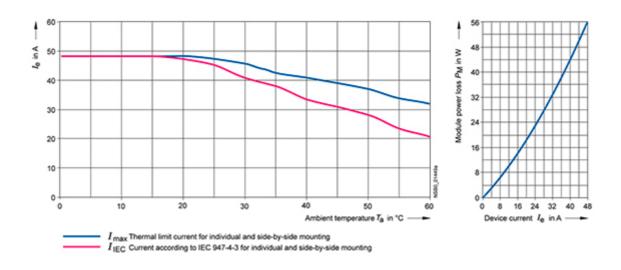

last modified: 5/6/2021 🖸