## **SIEMENS**

Data sheet 3RT2045-1AK60

power contactor, AC-3 80 A, 37 kW / 400 V 1 NO + 1 NC, 110 V AC/50 Hz 120 V/60 Hz 3-pole, 3 NO, Size S3 screw terminal



| Product brand name       | SIRIUS          |
|--------------------------|-----------------|
| Product designation      | Power contactor |
| Product type designation | 3RT2            |

| General technical data                                |                             |
|---|-----------------------------|
| Size of contactor                                     | S3                          |
| Product extension                                     |                             |
| <ul> <li>function module for communication</li> </ul> | No                          |
| Auxiliary switch                                      | Yes                         |
| Surge voltage resistance                              |                             |
| of main circuit rated value                           | 8 kV                        |
| <ul> <li>of auxiliary circuit rated value</li> </ul>  | 6 kV                        |
| maximum permissible voltage for safe isolation        |                             |
| • between coil and main contacts acc. to EN           | 690 V                       |
| 60947-1   |                             |
| Protection class IP                                   |                             |
| • on the front  | IP20                        |
| • of the terminal                                     | IP00                        |
| Shock resistance at rectangular impulse               |                             |
| • at AC   | 6.7 g / 5 ms, 4.0 g / 10 ms |
|   |                             |

| Shock resistance with sine pulse  |                              |
|---|------------------------------|
| • at AC   | 10.6 g / 5 ms, 6.3 g / 10 ms |
| Mechanical service life (switching cycles)                                |                              |
| • of contactor typical  | 10 000 000                   |
| of the contactor with added electronics-                                  | 5 000 000                    |
| compatible auxiliary switch block typical                                 |                              |
| of the contactor with added auxiliary switch                              | 10 000 000                   |
| block typical   |                              |
| Reference code acc. to DIN 40719 extended                                 | К                            |
| according to IEC 204-2 acc. to IEC 750                                    |                              |
| Reference code acc. to DIN EN 81346-2                                     | Q                            |
| Ambient conditions  |                              |
| Installation altitude at height above sea level                           |                              |
| • maximum   | 2 000 m                      |
| Main circuit  |                              |
| Number of poles for main current circuit                                  | 3                            |
| Number of NO contacts for main contacts                                   | 3                            |
| Operating voltage   |                              |
| <ul> <li>at AC-3 rated value maximum</li> </ul>                           | 1 000 V                      |
| Operating current   |                              |
| ● at AC-1 at 400 V  |                              |
| — at ambient temperature 40 °C rated value                                | 125 A                        |
| • at AC-1   |                              |
| — up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value    | 125 A                        |
| <ul> <li>up to 690 V at ambient temperature 60 °C rated value</li> </ul>  | 105 A                        |
| <ul> <li>up to 1000 V at ambient temperature 40 °C rated value</li> </ul> | 60 A                         |
| — up to 1000 V at ambient temperature 60 °C rated value                   | 50 A                         |
| • at AC-2 at 400 V rated value  | 80 A                         |
| • at AC-3   |                              |
| — at 400 V rated value  | 80 A                         |
| — at 500 V rated value  | 80 A                         |
| — at 690 V rated value  | 58 A                         |
| • at AC-4 at 400 V rated value  | 66 A                         |
| • at AC-5a up to 690 V rated value  | 110 A                        |
| • at AC-5b up to 400 V rated value  | 80 A                         |
| • at AC-6a  |                              |
| <ul><li>— up to 230 V at current peak n=20 rated value</li></ul>          | 80 A                         |

| <ul><li>— up to 400 V at current peak n=20 rated value</li></ul>   | 80 A   |
|--|--|
| — up to 500 V at current peak n=20 rated value   | 80 A   |
| — up to 690 V at current peak n=20 rated value   | 58 A   |
| • at AC-6a   |  |
| — up to 230 V at current peak n=30 rated   | 54 A   |
| value  |  |
| <ul><li>up to 400 V at current peak n=30 rated value</li></ul>   | 54 A   |
| <ul><li>— up to 500 V at current peak n=30 rated value</li></ul>   | 54 A   |
| — up to 690 V at current peak n=30 rated   | 54 A   |
| value  |  |
| Minimum cross-section in the main circuit  |  |
| • at maximum AC-1 rated value  | 50 mm²                                       |
| Connectable conductor cross-section in main circuit  |  |
| at AC-1  |  |
| <ul> <li>at 60 °C minimum permissible</li> </ul>   | 35 mm²                                       |
| • at 40 °C minimum permissible   | 50 mm²                                       |
| Operating current for approx. 200000 operating cycles at AC-4  |  |
| • at 400 V rated value   | 34 A   |
| • at 690 V rated value   | 24 A   |
| Operating current  |  |
| • at 1 current path at DC-1  |  |
| — at 24 V rated value  | 100 A  |
| — at 110 V rated value   | 9 A  |
| — at 220 V rated value   | 2 A  |
| — at 440 V rated value   |  |
| — at 440 v Taleu Value   | 0.6 A  |
| — at 440 V rated value  — at 600 V rated value   | 0.6 A<br>0.4 A                               |
|  |  |
| — at 600 V rated value   |  |
| <ul><li>— at 600 V rated value</li><li>• with 2 current paths in series at DC-1</li></ul>  | 0.4 A  |
| <ul> <li>— at 600 V rated value</li> <li>● with 2 current paths in series at DC-1</li> <li>— at 24 V rated value</li> </ul>  | 0.4 A<br>100 A                               |
| <ul> <li>at 600 V rated value</li> <li>with 2 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> </ul>  | 0.4 A<br>100 A<br>100 A                      |
| <ul> <li>at 600 V rated value</li> <li>with 2 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> </ul>  | 0.4 A<br>100 A<br>100 A<br>10 A              |
| <ul> <li>at 600 V rated value</li> <li>with 2 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> </ul>  | 0.4 A  100 A  100 A  10 A  10 A              |
| <ul> <li>at 600 V rated value</li> <li>with 2 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul>  | 0.4 A  100 A  100 A  10 A  10 A              |
| <ul> <li>at 600 V rated value</li> <li>with 2 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>with 3 current paths in series at DC-1</li> </ul>  | 0.4 A  100 A  100 A  10 A  1.8 A  1 A        |
| <ul> <li>at 600 V rated value</li> <li>with 2 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>with 3 current paths in series at DC-1</li> <li>at 24 V rated value</li> </ul>                               | 0.4 A  100 A  100 A  10 A  1.8 A  1 A        |
| <ul> <li>at 600 V rated value</li> <li>with 2 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>with 3 current paths in series at DC-1</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> </ul> | 0.4 A  100 A  100 A  10 A  1.8 A  1 A  100 A |

| — at 600 V rated value   | 2.6 A     |
|--|-----------|
| Operating current  |           |
| • at 1 current path at DC-3 at DC-5  |           |
| — at 24 V rated value  | 40 A      |
| — at 110 V rated value   | 2.5 A     |
| — at 220 V rated value   | 1 A       |
| — at 440 V rated value   | 0.15 A    |
| — at 600 V rated value   | 0.06 A    |
| <ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>                     |           |
| — at 24 V rated value  | 100 A     |
| — at 110 V rated value   | 100 A     |
| — at 220 V rated value   | 7 A       |
| — at 440 V rated value   | 0.42 A    |
| — at 600 V rated value   | 0.16 A    |
| • with 3 current paths in series at DC-3 at DC-5                                       |           |
| — at 24 V rated value  | 100 A     |
| — at 110 V rated value   | 100 A     |
| — at 220 V rated value   | 35 A      |
| — at 440 V rated value   | 0.8 A     |
| — at 600 V rated value   | 0.35 A    |
| Operating power  |           |
| • at AC-1  |           |
| — at 230 V rated value   | 47 kW     |
| — at 230 V at 60 °C rated value  | 40 kW     |
| — at 400 V rated value   | 82 kW     |
| — at 400 V at 60 °C rated value  | 69 kW     |
| — at 690 V rated value   | 142 kW    |
| — at 690 V at 60 °C rated value  | 119 kW    |
| • at AC-2 at 400 V rated value   | 37 kW     |
| • at AC-3  |           |
| — at 230 V rated value   | 22 kW     |
| — at 400 V rated value   | 37 kW     |
| — at 500 V rated value   | 45 kW     |
| — at 690 V rated value   | 55 kW     |
| Operating power for approx. 200000 operating cycles at AC-4                            |           |
| • at 400 V rated value   | 17.9 kW   |
| • at 690 V rated value   | 21.8 kW   |
| Thermal short-time current limited to 10 s   | 760 A     |
| Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor | 5.3 W     |
| <ul> <li>No-load switching frequency at AC</li> </ul>                                  | 5 000 1/h |
|  |           |

| 900 1/h   |
|-----------|
| 400 1/h   |
| 1 000 1/h |
| 300 1/h   |
|           |

| Control circuit/ Control   |                  |
|--|------------------|
| Type of voltage of the control supply voltage                                  | AC               |
| Control supply voltage at AC   |                  |
| ● at 50 Hz rated value   | 110 V            |
| • at 60 Hz rated value   | 120 V            |
| Operating range factor control supply voltage rated value of magnet coil at AC |                  |
| ● at 50 Hz   | 0.8 1.1          |
| ● at 60 Hz   | 0.8 1.1          |
| Apparent pick-up power of magnet coil at AC                                    |                  |
| ● at 50 Hz   | 326 V·A          |
| ● at 60 Hz   | 326 V·A          |
| Inductive power factor with closing power of the coil                          |                  |
| ● at 50 Hz   | 0.62             |
| ● at 60 Hz   | 0.55             |
| Apparent holding power of magnet coil at AC                                    |                  |
| ● at 50 Hz   | 22 V·A           |
| ● at 60 Hz   | 22 V·A           |
| Inductive power factor with the holding power of the coil                      |                  |
| ● at 50 Hz   | 0.36             |
| ● at 60 Hz   | 0.4              |
| Closing delay  |                  |
| • at AC  | 13 50 ms         |
| Opening delay  |                  |
| • at AC  | 10 21 ms         |
| Arcing time  | 10 20 ms         |
| Control version of the switch operating mechanism                              | Standard A1 - A2 |

| Auxiliary circuit                            |      |
|--|------|
| Number of NC contacts for auxiliary contacts |      |
| • instantaneous contact                      | 1    |
| Number of NO contacts for auxiliary contacts |      |
| • instantaneous contact                      | 1    |
| Operating current at AC-12 maximum           | 10 A |
| Operating current at AC-15                   |      |
| • at 230 V rated value                       | 6 A  |
| • at 400 V rated value                       | 3 A  |

| • at 500 V rated value                    | 2 A   |
|---|---|
| • at 690 V rated value                    | 1 A   |
| Operating current at DC-12                |   |
| • at 24 V rated value                     | 10 A  |
| • at 48 V rated value                     | 6 A   |
| • at 60 V rated value                     | 6 A   |
| • at 110 V rated value                    | 3 A   |
| • at 125 V rated value                    | 2 A   |
| • at 220 V rated value                    | 1 A   |
| • at 600 V rated value                    | 0.15 A  |
| Operating current at DC-13                |   |
| • at 24 V rated value                     | 10 A  |
| • at 48 V rated value                     | 2 A   |
| • at 60 V rated value                     | 2 A   |
| • at 110 V rated value                    | 1 A   |
| • at 125 V rated value                    | 0.9 A   |
| • at 220 V rated value                    | 0.3 A   |
| • at 600 V rated value                    | 0.1 A   |
| Contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |

| UL/CSA ratings                                       |             |
|--|-------------|
| Full-load current (FLA) for three-phase AC motor     |             |
| • at 480 V rated value                               | 77 A        |
| • at 600 V rated value                               | 62 A        |
| Yielded mechanical performance [hp]                  |             |
| <ul> <li>for single-phase AC motor</li> </ul>        |             |
| — at 110/120 V rated value                           | 7.5 hp      |
| — at 230 V rated value                               | 15 hp       |
| <ul> <li>for three-phase AC motor</li> </ul>         |             |
| — at 200/208 V rated value                           | 25 hp       |
| — at 220/230 V rated value                           | 30 hp       |
| — at 460/480 V rated value                           | 60 hp       |
| — at 575/600 V rated value                           | 60 hp       |
| Contact rating of auxiliary contacts according to UL | A600 / P600 |

| Short-circuit | pro | tection |
|---------------|-----|---------|
|---------------|-----|---------|

| Design of the fuse lin | ık |
|------------------------|----|
|------------------------|----|

- for short-circuit protection of the main circuit
  - with type of coordination 1 required

gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200

A (415 V, 80 kA)

— with type of assignment 2 required gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A

(415V,80kA)

• for short-circuit protection of the auxiliary switch required

gG: 10 A (500 V, 1 kA)

| tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rai according to DIN EN 60715  • Mounting type Side-by-side mounting (height)  Width 70 mm  Depth Required spacing  • with side-by-side mounting — forwards — upwards — downwards — at the side — of morards — at the side — of morards — at the side — ownwards — of live parts — forwards — upwards — ownwards — to mm  • for live parts — forwards — ownwards — o | nstallation/ mounting/ dimensions                             |  |  |  |  |
|--|---|--|--|--|--|
| (mounting type)  | (mounting position)   | +/-180° rotation possible on vertical mounting surface; can be |  |  |  |
| Mounting type Side-by-side mounting  (height)  140 mm  Midth  Depth  152 mm  Required spacing  • with side-by-side mounting  — forwards — upwards — downwards — at the side  • for grounded parts — of owards — upwards — upwards — 10 mm  • for grounded parts — forwards — upwards — 10 mm  • for grounded parts — forwards — at the side  • for mm  • for wards — at the side  10 mm  • for live parts — forwards — upwards — lo mm  • for live parts — forwards — upwards — 10 mm  • for main current circuit • for auxiliary and control current circuit • for auxiliary and control current circuit • for auxiliary and control current circuit • for analy and control current circuit • for auxiliary contacts • of magnet coil  Type of connectable conductor cross-sections • for main contacts — finely stranded with core end processing • at AWG conductors for main contacts • solid  2.5 16 mm²  **Connectable conductor cross-section for main contacts • solid  **Connectable conductor cross-section for main contacts • solid   |   |  |  |  |  |
| (height)  Width 70 mm  Depth 152 mm  Required spacing  • with side-by-side mounting  — forwards — upwards 10 mm — at the side 0 mm  • for grounded parts — forwards — upwards 10 mm — at the side 10 mm — at the side 10 mm  • for live parts — forwards 20 mm  — upwards 10 mm  • for live parts — forwards 20 mm — upwards 10 mm  • for live parts — forwards 20 mm  • for live parts — forwards 10 mm  • for live parts — forwards 10 mm  • for main current circuit sore with side 10 mm  — at the side 10 mm — at the side 10 mm  Type of electrical connection • for main current circuit sore-type terminals • of magnet coil Screw-type terminals  • for auxiliary and control current circuit sore-type terminals • for auxiliary and control current circuit sore-type terminals • for main contacts • for main contacts — finely stranded with core end processing 2x (2.5 35 mm²), 1x (2.5 50 mm²)  • at AWG conductor for main contacts • solid 2.5 16 mm²  | • (mounting type)   |  |  |  |  |
| Width 70 mm  Depth 152 mm  Required spacing  • with side-by-side mounting  — forwards 20 mm  — upwards 10 mm  — at the side 0 mm  • for grounded parts  — forwards 20 mm  — upwards 10 mm  — at the side 10 mm  • for live parts  — forwards 20 mm  — at many and some and  | Mounting type Side-by-side mounting                           | Yes  |  |  |  |
| Pepth Required spacing  • with side-by-side mounting  — forwards 20 mm  — upwards 10 mm  — at the side 0 mm  • for grounded parts  — forwards 20 mm  — towards 10 mm  • for grounded parts  — forwards 10 mm  — at the side 10 mm  — at the side 10 mm  — at the side 10 mm  • for live parts  — forwards 20 mm  — downwards 10 mm  • for live parts  — forwards 20 mm  — upwards 10 mm  • for live parts  — downwards 10 mm  — at the side 10 mm  — at the side 10 mm  — of orman current circuit screw-type terminals  **Type of electrical connection**  • for auxiliary and control current circuit screw-type terminals  • at contactor for auxiliary contacts Screw-type terminals  **Type of connectable conductor cross-sections*  • for main current circuit screw-type terminals  **Type of connectable conductor cross-sections*  • for main contacts  — finely stranded with core end processing 2x (2.5 35 mm²), 1x (2.5 50 mm²)  • at AWG conductors for main contacts  • solid 2.5 16 mm²  **Type of end conductor cross-section for main contacts  • solid 2.5 16 mm²  | (height)  | 140 mm   |  |  |  |
| Required spacing  • with side-by-side mounting  — forwards — upwards — at the side  • for grounded parts — forwards — upwards — of the side  • for grounded parts — forwards — upwards — upwards — upwards — at the side  • for live parts — downwards • for live parts — forwards — upwards — upwards — to fine parts — forwards — upwards — upwards — upwards — upwards — to mm  • for live parts — forwards — upwards — upwards — upwards — upwards — upwards — to mm  • for main current circuit • for auxiliary and control current circuit • at contactor for auxiliary contacts • of magnet coil  Type of connectable conductor cross-sections • for main contacts — finely stranded with core end processing • at AWG conductors for main contacts  • solid  2.5 16 mm²  2.5 16 mm²  2.5 16 mm²  | Width   | 70 mm  |  |  |  |
| with side-by-side mounting     — forwards     — upwards     — downwards     — at the side     • for grounded parts     — forwards     — upwards     — at the side     • for grounded parts     — forwards     — upwards     — upwards     — at the side     — downwards     — at the side     — downwards     — at the side     — downwards     — for live parts     — forwards     — upwards     — at the side     — of mm  | Depth   | 152 mm   |  |  |  |
| forwards   | Required spacing  |  |  |  |  |
| — upwards — downwards — at the side  • for grounded parts — forwards — upwards — upwards — at the side  • for grounded parts — of the side — upwards — at the side — downwards — of for live parts — forwards — upwards — of the side — of the minimals — at the side — of mm  Connections/Terminals  Type of electrical connection • for main current circuit • or auxiliary and control current circuit • of auxiliary and control current circuit • of magnet coil  Type of connectable conductor cross-sections • for main contacts — finely stranded with core end processing • at AWG conductors for main contacts  • solid  10 mm  20 mm | <ul><li>with side-by-side mounting</li></ul>                  |  |  |  |  |
| - downwards  | — forwards  | 20 mm  |  |  |  |
| - at the side  • for grounded parts  - forwards  - upwards  - at the side  - downwards  • for live parts  - forwards  - upwards  - to forwards  - upwards  - to forwards  - upwards  - to forwards  - upwards  - upwards  - upwards  - upwards  - upwards  - to mm  - downwards  - to mm  - at the side  10 mm  - to mm  - to mm  - to mm  - to main current circuit  • for auxiliary and control current circuit  • at contactor for auxiliary contacts  • of magnet coil  Type of connectable conductor cross-sections  • for main contacts  - finely stranded with core end processing  • at AWG conductors for main contacts  - solid  Connectable conductor cross-section for main contacts  • solid  2.5 16 mm²  | — upwards   | 10 mm  |  |  |  |
| for grounded parts         — forwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — upwards         — of wards         — forwards         — upwards         — upwards         — upwards         — upwards         — upwards         — downwards         — at the side         — to mm         — downwards         — at the side         — of mm         — of wards         — at the side         — of mm         — of wards         — at the side         — of mm         — of wards         — at the side         — of mm         — of wards         — of mm         — of main current circuit         — of a axiliary and control current circuit         — of magnet coil  Type of connectable conductor cross-sections         — of main contacts         — finely stranded with core end processing         — at AWG conductors for main contacts         — at AWG conductors for main contacts         — solid              — solid   | — downwards   | 10 mm  |  |  |  |
|  | — at the side   | 0 mm   |  |  |  |
| - upwards 10 mm - at the side 10 mm - downwards 10 mm  • for live parts - forwards 20 mm - upwards 10 mm - downwards 10 mm - downwards 10 mm - at the side 10 mm - at the side 10 mm - at the side 50 mm - at the side 50 mm - at the side 50 mm  Sonnections/Terminals  Type of electrical connection • for main current circuit screw-type terminals • for auxiliary and control current circuit screw-type terminals • at contactor for auxiliary contacts Screw-type terminals • of magnet coil Screw-type terminals  Type of connectable conductor cross-sections • for main contacts - finely stranded with core end processing 2x (2.5 35 mm²), 1x (2.5 50 mm²) • at AWG conductors for main contacts  Connectable conductor cross-section for main contacts • solid 2.5 16 mm²   | • for grounded parts  |  |  |  |  |
| - at the side  | — forwards  | 20 mm  |  |  |  |
| - downwards  • for live parts  - forwards  - upwards  - downwards  - at the side  Connections/Terminals  Type of electrical connection  • for auxiliary and control current circuit  • at contactor for auxiliary contacts  • of magnet coil  Type of connectable conductor cross-sections  • for main contacts  - finely stranded with core end processing  • at AWG conductors for main contacts  - solid  10 mm  20 mm  10 mm  Screw-type terminals  screw-type terminals  Screw-type terminals  Screw-type terminals  Screw-type terminals  2x (2.5 35 mm²), 1x (2.5 50 mm²)  2x (10 1/0), 1x (10 2)  Connectable conductor cross-section for main contacts  • solid  2.5 16 mm²   | — upwards   | 10 mm  |  |  |  |
| for live parts         — forwards         — upwards         — downwards         — at the side  Connections/Terminals  Type of electrical connection         • for main current circuit         • at contactor for auxiliary and control current circuit         • at contactor for auxiliary contacts         • of magnet coil  Type of connectable conductor cross-sections         • for main contacts         — finely stranded with core end processing         • at AWG conductors for main contacts         • solid  Connectable conductor cross-section for main contacts         • solid  Connectable conductor cross-section for main contacts         • solid  | — at the side   | 10 mm  |  |  |  |
| - forwards - upwards - downwards - at the side  Connections/Terminals  Type of electrical connection  • for main current circuit • for auxiliary and control current circuit • at contactor for auxiliary contacts • of magnet coil  Type of connectable conductor cross-sections • for main contacts - finely stranded with core end processing • at AWG conductors for main contacts  Connectable conductor cross-section for main contacts • solid  2.5 16 mm²  | — downwards   | 10 mm  |  |  |  |
| - upwards - downwards - at the side  Type of electrical connection  • for main current circuit • at contactor for auxiliary contacts • of magnet coil  Type of connectable conductor cross-sections • for main contacts - finely stranded with core end processing • at AWG conductors for main contacts  • solid  10 mm  10 mm  Screw-type terminals  screw-type terminals  Screw-type terminals  Screw-type terminals  Screw-type terminals  2x (2.5 35 mm²), 1x (2.5 50 mm²)  2x (10 1/0), 1x (10 2)  | • for live parts  |  |  |  |  |
| - downwards - at the side  Connections/Terminals  Type of electrical connection  • for main current circuit • for auxiliary and control current circuit • at contactor for auxiliary contacts • of magnet coil  Screw-type terminals  Connectable conductor cross-sections • for main contacts - finely stranded with core end processing • at AWG conductors for main contacts  • at AWG conductor cross-section for main contacts  Connectable conductor cross-section for main contacts  • solid  10 mm  10 mm 10 mm  10 mm 10  | — forwards  | 20 mm  |  |  |  |
| — at the side  Type of electrical connection  • for main current circuit  • for auxiliary and control current circuit  • at contactor for auxiliary contacts  • of magnet coil  Type of connectable conductor cross-sections  • for main contacts  — finely stranded with core end processing  • at AWG conductors for main contacts  • solid  10 mm  Screw-type terminals  screw-type terminals  Screw-type terminals  Screw-type terminals  2x (2.5 35 mm²), 1x (2.5 50 mm²)  2x (10 1/0), 1x (10 2)   | — upwards   | 10 mm  |  |  |  |
| Type of electrical connection  • for main current circuit  • for auxiliary and control current circuit  • at contactor for auxiliary contacts  • of magnet coil  Type of connectable conductor cross-sections  • for main contacts  — finely stranded with core end processing  • at AWG conductors for main contacts  Connectable conductor cross-section for main contacts  • solid  2.5 16 mm²  | — downwards   | 10 mm  |  |  |  |
| Type of electrical connection  • for main current circuit  • for auxiliary and control current circuit  • at contactor for auxiliary contacts  • of magnet coil  Type of connectable conductor cross-sections  • for main contacts  — finely stranded with core end processing  • at AWG conductors for main contacts  2x (2.5 35 mm²), 1x (2.5 50 mm²)  2x (10 1/0), 1x (10 2)  Connectable conductor cross-section for main contacts  • solid  2.5 16 mm²  | — at the side   | 10 mm  |  |  |  |
| <ul> <li>for main current circuit</li> <li>for auxiliary and control current circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> <li>Screw-type terminals</li> <li>Screw-type terminals</li> </ul> Type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>finely stranded with core end processing</li> <li>at AWG conductors for main contacts</li> </ul> 2x (2.5 35 mm²), 1x (2.5 50 mm²) <ul> <li>at AWG conductors for main contacts</li> </ul> Connectable conductor cross-section for main contacts <ul> <li>solid</li> <li>2.5 16 mm²</li> </ul> 2.5 16 mm² 2.5 16 mm² 2.5 16 mm²   | Connections/Terminals   |  |  |  |  |
| <ul> <li>for auxiliary and control current circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> <li>Type of connectable conductor cross-sections</li> <li>for main contacts</li> <li>finely stranded with core end processing</li> <li>at AWG conductors for main contacts</li> <li>2x (2.5 35 mm²), 1x (2.5 50 mm²)</li> <li>2x (10 1/0), 1x (10 2)</li> <li>Connectable conductor cross-section for main contacts</li> <li>solid</li> </ul>   | Type of electrical connection                                 |  |  |  |  |
| <ul> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> <li>Screw-type terminals</li> <li>Type of connectable conductor cross-sections</li> <li>for main contacts</li> <li>— finely stranded with core end processing</li> <li>at AWG conductors for main contacts</li> <li>2x (2.5 35 mm²), 1x (2.5 50 mm²)</li> <li>at AWG conductors for main contacts</li> <li>2x (10 1/0), 1x (10 2)</li> <li>Connectable conductor cross-section for main contacts</li> <li>solid</li> </ul>   | • for main current circuit                                    | screw-type terminals   |  |  |  |
| <ul> <li>of magnet coil</li> <li>Type of connectable conductor cross-sections</li> <li>for main contacts</li> <li>finely stranded with core end processing</li> <li>at AWG conductors for main contacts</li> <li>2x (2.5 35 mm²), 1x (2.5 50 mm²)</li> <li>2x (10 1/0), 1x (10 2)</li> <li>Connectable conductor cross-section for main contacts</li> <li>solid</li> </ul>   | <ul> <li>for auxiliary and control current circuit</li> </ul> | screw-type terminals   |  |  |  |
| Type of connectable conductor cross-sections  • for main contacts  — finely stranded with core end processing  • at AWG conductors for main contacts  Connectable conductor cross-section for main contacts  • solid  2x (2.5 35 mm²), 1x (2.5 50 mm²)  2x (10 1/0), 1x (10 2)   | <ul> <li>at contactor for auxiliary contacts</li> </ul>       | Screw-type terminals   |  |  |  |
| <ul> <li>for main contacts         <ul> <li>finely stranded with core end processing</li> <li>at AWG conductors for main contacts</li> </ul> </li> <li>Connectable conductor cross-section for main contacts         <ul> <li>solid</li> </ul> </li> <li>2x (2.5 35 mm²), 1x (2.5 50 mm²)</li> <li>2x (10 1/0), 1x (10 2)</li> </ul>   | • of magnet coil  | Screw-type terminals   |  |  |  |
| — finely stranded with core end processing  • at AWG conductors for main contacts  Connectable conductor cross-section for main contacts  • solid  2x (2.5 35 mm²), 1x (2.5 50 mm²)  2x (10 1/0), 1x (10 2)  2x (10 1/0), 1x (10 2)  | Type of connectable conductor cross-sections                  |  |  |  |  |
| <ul> <li>at AWG conductors for main contacts</li> <li>2x (10 1/0), 1x (10 2)</li> <li>Connectable conductor cross-section for main contacts</li> <li>solid</li> <li>2.5 16 mm²</li> </ul>  | • for main contacts   |  |  |  |  |
| Connectable conductor cross-section for main contacts  • solid  2.5 16 mm²   | — finely stranded with core end processing                    | 2x (2.5 35 mm²), 1x (2.5 50 mm²)                               |  |  |  |
| contacts  • solid  2.5 16 mm²  | <ul> <li>at AWG conductors for main contacts</li> </ul>       | 2x (10 1/0), 1x (10 2)   |  |  |  |
| • solid 2.5 16 mm²   | Connectable conductor cross-section for main                  |  |  |  |  |
|  |   | 2.5 16 mm²   |  |  |  |
|  | • stranded  | 6 70 mm <sup>2</sup>   |  |  |  |

| <ul> <li>finely stranded with core end processing</li> </ul> | 2.5 50 mm²                          |
|--|-------------------------------------|
| Connectable conductor cross-section for auxiliary            |                                     |
| contacts   |                                     |
| <ul> <li>single or multi-stranded</li> </ul>                 | 0.5 2.5 mm <sup>2</sup>             |
| <ul> <li>finely stranded with core end processing</li> </ul> | 0.5 2.5 mm <sup>2</sup>             |
| Type of connectable conductor cross-sections                 |                                     |
| for auxiliary contacts                                       |                                     |
| <ul><li>— single or multi-stranded</li></ul>                 | 2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²) |
| <ul> <li>finely stranded with core end processing</li> </ul> | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| <ul> <li>at AWG conductors for auxiliary contacts</li> </ul> | 2x (20 16), 2x (18 14)              |
| AWG number as coded connectable conductor cross              |                                     |
| section  |                                     |
| • for main contacts  | 10 2                                |
| • for auxiliary contacts                                     | 20 14                               |
|  |                                     |

| Safety related data  |  |  |  |
|--|--|--|--|
| B10 value  |  |  |  |
| <ul> <li>with high demand rate acc. to SN 31920</li> </ul>         | 1 000 000  |  |  |
| Proportion of dangerous failures                                   |  |  |  |
| <ul> <li>with low demand rate acc. to SN 31920</li> </ul>          | 40 %   |  |  |
| <ul> <li>with high demand rate acc. to SN 31920</li> </ul>         | 73 %   |  |  |
| Failure rate [FIT]   |  |  |  |
| <ul> <li>with low demand rate acc. to SN 31920</li> </ul>          | 100 FIT  |  |  |
| Product function   |  |  |  |
| <ul> <li>Mirror contact acc. to IEC 60947-4-1</li> </ul>           | Yes  |  |  |
| <ul><li>positively driven operation acc. to IEC 60947-5-</li></ul> | No   |  |  |
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y   |  |  |
| Protection against electrical shock                                | finger-safe when touched vertically from front acc. to IEC 60529 |  |  |
| Suitability for use  |  |  |  |
| <ul> <li>safety-related switching on</li> </ul>                    | No   |  |  |
| <ul> <li>safety-related switching OFF</li> </ul>                   | No   |  |  |

## Certificates/approvals

**General Product Approval EMC Declaration of** Conformity













| Declaration of Conformity | Test Certificates                  | 3                        | other        | Railway             |  |
|---------------------------|------------------------------------|--------------------------|--------------|---------------------|--|
| Miscellaneous             | Type Test Certificates/Test Report | Special Test Certificate | Confirmation | Vibration and Shock |  |

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-1AK60

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RT}2045-1AK60$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-1AK60


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2045-1AK60&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-1AK60/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2045-1AK60&objecttype=14&gridview=view1

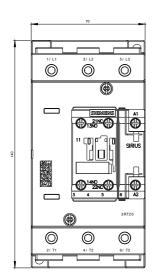

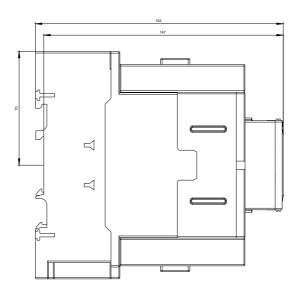

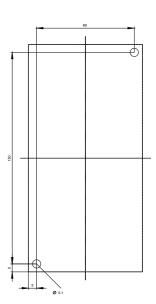

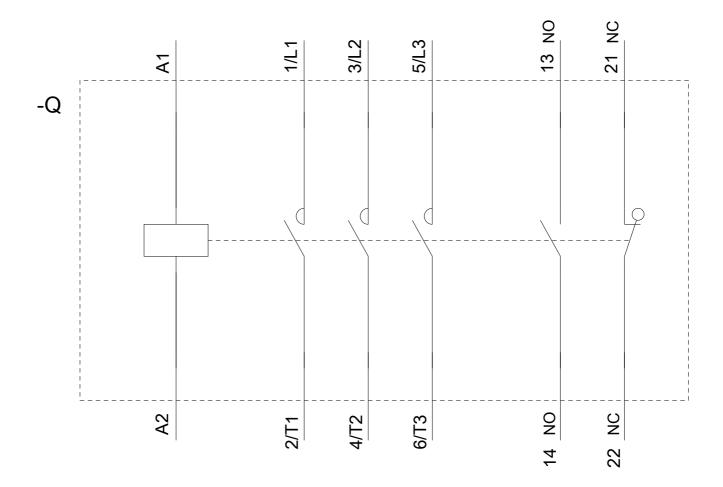

last modified: 04/18/2019