The Mini Integrated LED Track fixture series is sleek, compact and ideal for accent or display lighting. Featuring die cast construction with an elegant design, these integrated luminaires are ideal for retail store construction, hospitality, other light commercial, or residential applications where superior performance is desired. The mini-series is sized and designed to replace traditional MR16 lamp holders but delivers additional lumens, longer life and excellent optical performance.

Catalog #	Туре
Project	
Froject	
Comments	Date
Prepared by	

### **Specification Features**

### **Quick Lock Adapter**

- Attaches electrically and mechanically anywhere along the track.
- Includes discrete locking tab that locks the luminaire on the track and allows for easy removal and repositioning.

### **LED Light Engine**

- Chip on board LED provides a uniform source with high efficiency and no pixilation.
- Available in 90 CRI minimum, R9 greater than 50 and color accuracy within 3 SDCM provide uniformity.
- Available in 2700K, 3000K, 3500K and 4000K fixed CCT.

#### **Optics**

- The design allows for optics to be changed in the field and adjust as neccesary.
- Available in spot, flood and narrow flood distributions

### Media

- Precision machined trim ring contains unique locking mechanism, and can accept 1 piece of standard 2" MR16 media.
- See below for list of compatible media accessories and refer to instruction document for further details on installation.

#### **Luminaire Arm**

 Arm allows the lamp housing tilt to adjust 90° vertically and 355° horizontally. This enables a clean look while providing full aiming capabilities.

### **Dimming**

- Designed for continuous dimming capability to nominally 5% with many 120V Leading Edge (LE) and Trailing Edge (TE) Phase Control dimmers.
- Consult dimming guide for list of recommended dimmers or dimmer manufacturer for compatibility and conditions of use
- Dimming only available with 120V configurations.

#### Driver

 Fixtures are equipped with a 15W integral Universal voltage (120V – 277V), 50/60 Hz constant current driver that provides noise free operation.

### Compliance

- cULus certified for use with Halo single circuit PowerTrac & Global® TEK/HTEK track
- EMI/RFI emissions per FCC 47CFR Part 15 Class B consumer limits.
- Contains no mercury or lead and RoHS compliant.
- Photometric testing in accordance with IES LM-79-08.
- Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11.

### Warranty

Five year limited warranty, consult website for details. cooperlighting.com



# Halo Mini Series L812

LED Track Head 90 CRI








СВСР	800	1100
Spot 15°	6123	9646
Narrow Flood 22°	4385	5788
Flood 37°	1791	2558

Lighting Data - 3000K Spot					
Lumens	794	1131			
Lumens per Watt	75.6	73.0			

<b>Energy Data</b>		
Input Power	10.5W	15.5W
Power Factor	≥.99	≥.99
Input Current	0.09	0.128

#### **Dimensions**

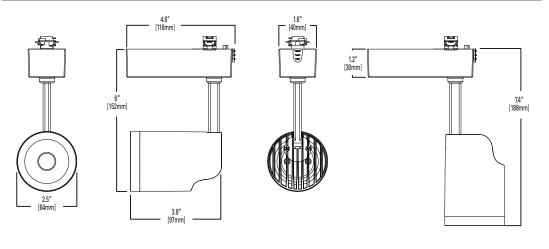

### **Ordering Information**

SAMPLE NUMBER: L81211SP9030SL (Halo Track adapter, 1100 lumen, Spot Distribution, 90 CRI, 3000K, with Silver Finish)

Track System	Series / Style	Lumen Package	Distribution	CRI	Color Temp	Finish	Voltage
L= Halo and Lazer Power Trac LJ=Juno® Track¹ LL=Lightolier® Track²	<b>812</b> =Mini LED Accent Cylinder	<b>11</b> =1100 lumens <b>08</b> =800 lumens	SP=Spot (15°) NF=Narrow Flood (22°) FL=Flood (38°)	<b>90</b> =90	<b>27</b> =2700K <b>30</b> =3000K <b>35</b> =3500K <b>40</b> =4000K	P=White MB=Matte Black SL=Silver	Blank=120V

NOTES: 1. Juno®T single circuit and 2-circuit track contact. Juno® is a registered trademark of Juno® Lighting. 2. Lightolier® Lyfespan 6000 single circuit and 2 circuit track contact. Lightolier® is a registered trademark of Philips Lighting.

Select models are DesignLights™ Consortium Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details.



page 2 L812 Mini LED Accent Cylinder

### Accessories (order separately)

### L100 Series

### 2" 50mm UV and Color Filters

For use with MR16 and LED lampholders. Make a power lighting statement by injecting soft or intense hues to accent any space.

L112=Red Gel Filter

**L114**=Ultraviolet, Dichoric Filter

L120=Red. Dichoric Filter

L121=Amber, Dichoric Filter


L122=Yellow, Dichoric Filter

L123=Green. Dichoric Filter

L124=Daylight Blue, Dichoric Filter

L125=Blue, Dichoric Filter L127=Cosmetic (2700K), Dichoric Filter

L131=Amber, Gel Filter





L100 Series UV and Color Filters

### L100 Series

### **Optical Lenses**

### L110N=Diffuse Sandblasted Lens

Provides an even beam spread from MR16 lamps - especially useful in wall washing.

### L111=Soft Focus Lens

Smooths irregular beam pattern while maintaining high controlled illumination levels and beam angles of MR16 lamps.

#### L113=Prismatic Spread Lens


Provides a symmetrical broadening of MR16 lamp beams. Suitable when a wide, uniform light distribution is required.

### L115=Linear Spread Lens

Fans out the MR16 beam 55° (27-1/2° to each side) to produce a wide rectangular pattern.

# **L100MB**=Expanded metal louver

Miniature black finished hexagonal-cell louver - controls light spill while retaining lamp optics.

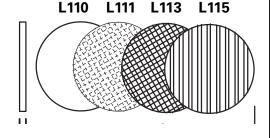



**L100 Series Optical Lenses** 

#### 811xOPK

### Interchangable Optics

**811SPOPK** = 811 or 812 Spot Optic **811NFOPK** = 811 or 812 Narrow Flood Optic 811FLOPK = 811 or 812 Flood Optic



**811xOPK Interchangle Optic** 

### L1973

#### Track Monopoint

L1973=description



L1973 Monopoint

# LZR210

## **Lazer Track Monopoint**

LZR210=description



**LZR210** Monopoint

page 3 L812 Mini LED Accent Cylinder

# Photometry - 800 Lumen

### L812 - MB

Color Temp = 3000K	0 deg Aiming Angle Horizontal Footcandles			
<b>4000K Multiplier</b> = 1.083	МН	FC	L	w
	5'	244.9	1.2	1.2
<b>Spot</b> : 15D <b>CBCP</b> : 6123 <b>Lumens</b> : 794 <b>LPW</b> : 76	7.5'	108.9	2	2
	10'	61.2	2.6	2.6
	12.5'	39.2	3.2	3.2
	15'	27.2	4	4

30 deg Aiming Angle Horizontal Footcandles						
МН	MH FC L W CB					
5'	161	1.7	1.4	2.9		
7.5'	71.5	2.6	2.2	4.3		
10'	40.2	3.5	3	5.8		
12.5'	25.8	4.4	3.8	7.2		
15'	17.9	5.3	4.6	8.7		

30 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	w	СВ
3'	99.4	2.7	1.4	5.2
4'	55.9	3.7	2	6.9
5'	35.8	4.6	2.4	8.7
6'	24.8	5.5	3	10.4

Ver	60 deg Aiming Angle Vertical Footcandles on Wall					
D	FC	L	w	СВ		
3'	447.1	1	0.8	1.7		
4'	251.5	1.3	1.2	2.3		
5'	161	1.7	1.4	2.9		
6'	111.8	2.1	1.8	3.5		

Color Temp = 3000K	0 deg Aiming Angle Horizontal Footcandles			
<b>4000K Multiplier</b> = 1.083				
	5'	175.4	1.6	1.6
Spot: 22D	7.5'	78	2.6	2.6
CBCP: 4385	10'	43.8	3.4	3.4
LPW: 75	12.5'	28.1	4.4	4.4
	15'	19.5	5.2	5.2

ŀ	30 deg Aiming Angle Horizontal Footcandles				
МН	FC	L	w	СВ	
5'	118.8	2.1	2	2.9	
7.5'	52.8	3.3	3	4.3	
10'	29.7	4.4	4	5.8	
12.5'	19	5.6	5	7.2	
15'	13.2	6.6	6	8.7	

30 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	W	СВ
3'	80.2	2.9	1.8	5.2
4'	45.1	3.9	2.4	6.9
5'	28.9	4.9	3	8.7
6'	20	5.9	3.6	10.4

60 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	W	СВ
3'	330.1	1.3	1.2	1.7
4'	185.7	1.7	1.6	2.3
5'	118.8	2.1	2	2.9
6'	82.5	2.6	2.4	3.5

Color Temp = 3000K	0 deg Aiming Angle Horizontal Footcandles			•
<b>4000K Multiplier</b> = 1.083	МН	FC	L	w
	5'	71.6	3	3
Spot: 38D	7.5'	31.8	4.4	4.4
CBCP: 1791 Lumens: 819	10'	17.9	6	6
<b>LPW</b> : 79	12.5'	11.5	7.4	7.4
	15'	8	9	9

30 deg Aiming Angle Horizontal Footcandles				
MH FC L W CB				
5'	50.8	3.5	3.2	2.9
7.5'	22.6	5.2	5	4.3
10'	12.7	7.1	6.6	5.8
12.5'	8.1	8.9	8.2	7.2
15'	5.6	10.6	10	8.7

30 deg Aiming Angle Vertical Footcandles on Wall					
FC L W CB					
45	3.4	2.6	5.2		
25.3	4.6	3.6	6.9		
16.2	5.8	4.4	8.7		
11.3	6.9	5.4	10.4		
	FC 45 25.3 16.2	FC L 45 3.4 25.3 4.6 16.2 5.8	tical Footcandles on V           FC         L         W           45         3.4         2.6           25.3         4.6         3.6           16.2         5.8         4.4		

Ver	60 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	w	СВ	
3'	141.1	2	2	1.7	
4'	79.4	2.8	2.6	2.3	
5'	50.8	3.5	3.2	2.9	
6'	35.3	4.2	4	3.5	

# **Notes and Definitions**

Beam spread is to 50% center beam candlepower (CBCP).


**D**= Distance in feet to floor or wall.

**FC**= Footcandles on floor or wall at center beam aiming location.

 $\mathbf{L} = \text{Effective Visual Beam length in feet (50\% of maximum footcandle level)}$ 

W= Effective Visual Beam width in feet (50% of maximum footcandle level)

**CB**= Distance in feet across or down to center beam location

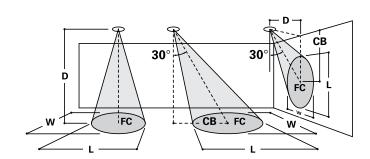

page 4 L812 Mini LED Accent Cylinder

# Photometry - 1100 Lumen

### L812 - MB

Color Temp = 3000K	0 deg Aiming Angle Horizontal Footcandles			
<b>4000K Multiplier</b> = 1.118	МН	FC	L	w
	5'	385.8	1.2	1.2
Spot: 15D	7.5'	171.5	1.8	1.8
CBCP: 9646 Lumens: 1131 LPW: 73	10'	96.5	2.6	2.6
	12.5'	61.7	3.2	3.2
	15'	42.9	3.8	3.8

30 deg Aiming Angle Horizontal Footcandles						
МН	MH FC L W CB					
5'	258.4	1.6	1.4	2.9		
7.5'	114.8	2.5	2.2	4.3		
10'	64.6	3.3	3	5.8		
12.5'	41.3	4.2	3.6	7.2		
15'	28.7	5.1	4.4	8.7		

30 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	W	СВ
3'	161.8	2.5	1.4	5.2
4'	91	3.5	1.8	6.9
5'	58.3	4.3	2.2	8.7
6'	40.5	5.2	2.8	10.4

Ver	60 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	w	СВ	
3'	717.7	1	0.8	1.7	
4'	403.7	1.3	1.2	2.3	
5'	258.4	1.6	1.4	2.9	
6'	179.4	2	1.8	3.5	

Color Temp = 3000K	0 deg Aiming Angle Horizontal Footcandles			
<b>4000K Multiplier</b> = 1.118	МН	FC	L	w
	5'	231.5	1.8	1.8
<b>Spot</b> : 22D <b>CBCP</b> : 5788 <b>Lumens</b> : 1104 <b>LPW</b> : 71	7.5'	102.9	2.6	2.6
	10'	57.9	3.6	3.6
	12.5'	37	4.6	4.6
	15'	25.7	5.4	5.4

30 deg Aiming Angle Horizontal Footcandles							
МН	MH FC L W CB						
5'	157.5	2.3	2	2.9			
7.5'	70	3.5	3	4.3			
10'	39.4	4.6	4.2	5.8			
12.5'	25.2	5.8	5.2	7.2			
15'	17.5	6.8	6.2	8.7			

30 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	w	СВ
3'	109.8	2.8	1.8	5.2
4'	61.8	3.8	2.4	6.9
5'	39.5	4.8	3	8.7
6'	27.5	5.8	3.8	10.4

60 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	W	СВ
3'	437.6	1.3	1.2	1.7
4'	246.2	1.8	1.6	2.3
5'	157.5	2.3	2	2.9
6'	109.4	2.7	2.4	3.5

Color Temp = 3000K	0 deg Aiming Angle Horizontal Footcandles			
<b>4000K Multiplier</b> = 1.118	МН	FC	L	w
<b>Spot</b> : 38D <b>CBCP</b> : 2558 <b>Lumens</b> : 1242 <b>LPW</b> : 80	5'	102.3	3	3
	7.5'	45.5	4.6	4.6
	10'	25.6	6.2	6.2
	12.5'	16.4	7.8	7.8
	15'	11.4	9.4	9.4

30 deg Aiming Angle Horizontal Footcandles				
МН	FC	L	LWC	
5'	73.5	3.8	3.4	2.9
7.5'	32.7	5.6	5.2	4.3
10'	18.4	7.6	7	5.8
12.5'	11.8	9.5	8.6	7.2
15'	8.2	11.4	10.4	8.7

30 deg Aiming Angle Vertical Footcandles on Wall				
D	FC	L	W	СВ
3'	69.3	3.3	2.8	5.2
4'	39	4.5	3.6	6.9
5'	25	5.6	4.6	8.7
6'	17.3	6.8	5.6	10.4

60 deg Aiming Angle Vertical Footcandles on Wall					
D	FC	L	w	СВ	
3'	204.2	2.2	2	1.7	
4'	114.9	3	2.8	2.3	
5'	73.5	3.8	3.4	2.9	
6'	51.1	4.5	4.2	3.5	

# **Notes and Definitions**

Beam spread is to 50% center beam candlepower (CBCP).

**D**= Distance in feet to floor or wall.

FC= Footcandles on floor or wall at center beam aiming location.

 $\mathbf{L}=$  Effective Visual Beam length in feet (50% of maximum footcandle level)

W= Effective Visual Beam width in feet (50% of maximum footcandle level)

**CB**= Distance in feet across or down to center beam location

