PROGRESS LIGHTING™

Project:

Fixture Type:

Location:

Contact:

District LED

Wall Mounted • Wet Location Listed PROGRESS LED

P5622-2030K9

Description:

District Collection LED Medium Wall Lantern
Medium Wall Lantern

Specifications:

- Antique Bronze, Painted White Inside Aluminum Shade
- White Acrylic Diffuser
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" recessed outlet box: 5.125 in W., 1.625 in ht., 5.125 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

Performance:

Number of Modules	1
Input Power	9 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	623/69.2 (LM-82)
Lumens/LPW (Delivered)	420/53.6 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	cCSAus Wet Location Listed

Dimensions:

Width: 8 in
Height: 8-1/4 in
Depth: 10-1/4 in
H/CTR: 4-1/8 in

Antique Bronze, Painted White Inside Aluminum Shade
Width: 8-1/16 in
Height: 5-7/8 in

White Acrylic Diffuser
Width: 2-7/8 in
Height: 0-13/16 in

PROGRESS LIGHTING™

District LED

Wall Mounted • Wet Location Listed PROGRESS LED

P5622-2030K9

Photometrics:

ELECTRICAL DATA	P5622-2030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.075 A
Power Factor	Greater than 0.90
THD	<20%
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

Over-voltage, over-current, short-circuit protected

*See Dimming Notes for more information

P5622-2030K9

LED Light Engine: 3000 K 90 CRI
System Wattage: 9
Fixture delivered lumens: 420
Fixture Efficacy: 53.6
Spacing Criteria: 1.27

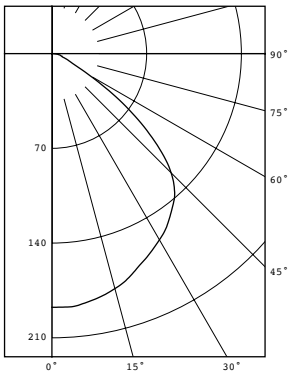

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	187	
5	188	18
15	180	51
25	166	77
35	151	94
45	125	94
55	64	57
65	16	18
75	8	8
85	3	3
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	145	34.6
0-40	239	57.0
0-60	390	93.0
0-90	420	100.0
90-180	0	0.0
0-180	420	100.0

Test **17.00652** Test Date **03/15/17**

P5622-2030K9

Dimming Notes:

P5622-2030K9 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Nova T NTELV-300
Lutron_Vierti VTELV-600
Lutron_Maestro MAELV-600
Lutron_spacer/system SPSELV-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.
Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.
Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.