M-8384 2

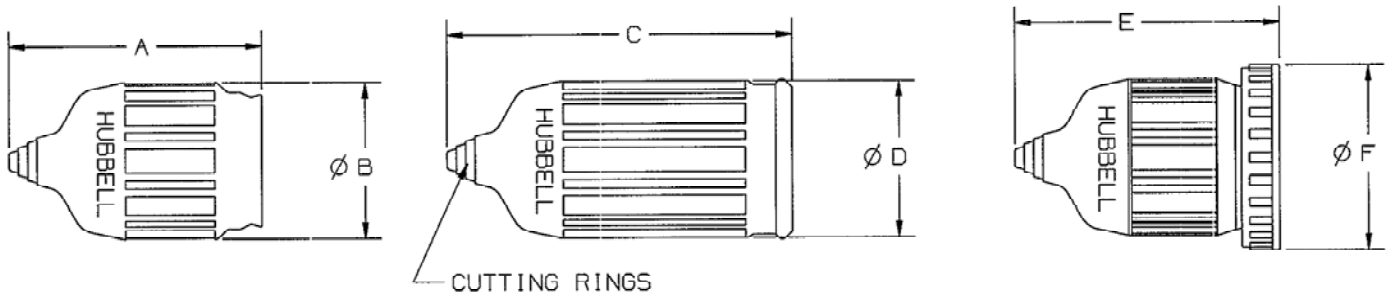

CAT NO.	SIZE	WHERE USED	COLOR	"A"	"B"	"C"	"D"	"E"	"F"
HBL6031	3 WIRE	FOR PLUGS WHEN USED IN A CORD SET. FOR CONNECTORS WHEN USED WITH FLANGED INLETS.	BLACK	4.06	Ø2.53				
HBL60CM31	3 WIRE		YELLOW	4.06	Ø2.53				
HBL60CM31W	3 WIRE		WHITE	4.06	Ø2.53				
HBL6032	3 WIRE	FOR CONNECTORS WHEN USED IN A CORD SET.	BLACK			5.54	Ø2.57		
HBL60CM32	3 WIRE		YELLOW			5.54	Ø2.57		
HBL6035	4&5 WIRE	FOR PLUGS WHEN USED IN A CORD SET. FOR CONNECTORS WHEN USED WITH FLANGED INLETS.	BLACK	4.06	Ø2.60				
HBL60CM35	4&5 WIRE		YELLOW	4.06	Ø2.60				
HBL6036	4&5 WIRE	FOR CONNECTORS WHEN USED IN A CORD SET.	BLACK			5.50	Ø2.85		
HBL60CM36	4&5 WIRE		YELLOW			5.50	Ø2.85		
HBL60CM33	3 WIRE	FOR PLUGS WHEN USED WITH POWER OUTLET. FOR CONNECTORS WHEN USED WITH SHORE POWER INLETS.	YELLOW					4.23	Ø2.98
HBL60CM33W	3 WIRE		WHITE					4.23	Ø2.98

NOTES:
1. FITS INSULGRIP® DEVICES ONLY.
2. IP55 SUITABILITY WHEN INSTALLED AND USED PROPERLY WITH MATING COMPONENTS.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BOOT	EPDM/NEOPRENE BLEND	
THREADED RING	POLYCARBONATE	GRAY

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☒ NON-REPAIRABLE ☐

SYM	REVISIONS	APP	DATE
2	IN TABLE ADDED CAT NO'S HBL60CM31W, HBL60CM33W AND SPECS PER DCN19654 MYA	DJP	2/28/13
1	10/29/00 RELEASED PER DCN #8207 ALM	ZIMM	10/29/00

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
SEAL-TITE® BOOTS
FOR 20A & 30A
INSULGRIP TWIST-LOCK® DEVICES

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ±.01
.XXX = ±.005
ANGLES = ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY ALM	APP. BY
TR. BY	SCALE NONE
CHK. BY	DATE 10/29/00

B

M-8384

2