
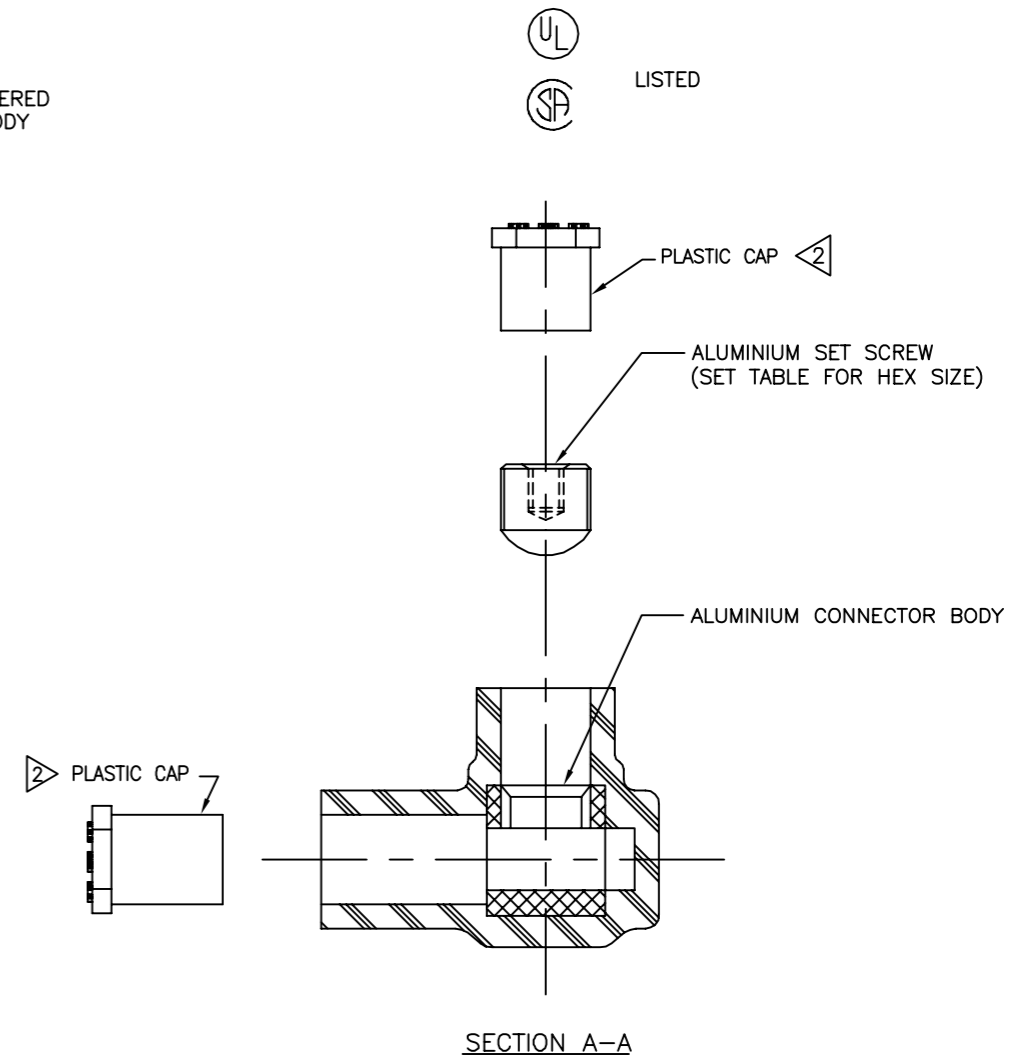


DRAWING NO. <b>SD214514</b>							
CATALOG NO.	WIRE RANGE (AWG/kcmil)	L	W	H	HEX KEY	N	TORQUE IN/LB
1PL4-2	#14-#4	1.08 [27]	1.16 [29]	1.25 [32]	1/8	2	45
1PL 2/0 -2	#14-2/0	1.52 [39]	1.40 [36]	1.38 [35]	3/16	2	120

REV.	DATE	DESCRIPTION	ECO	BY	C'K'D.
C	12/14/12	TORQUE VALUE INCLUDED.	29771	PB	MA

FEATURES	BENEFITS
PLASTISOL COVERED AL6061-T6 BODY	SAVES TIME, LOWERS INSTALLATION COSTS, ELIMINATES TAPING.
OXIDE-INHIBITOR IS PRE-INSTALLED	INHIBITS MOISTURE AND CONTAMINANTS FROM ENTERING THE CONTACT AREA
RANGE-TAKING	REDUCES THE NUMBER OF CONNECTORS CARRIED IN INVENTORY

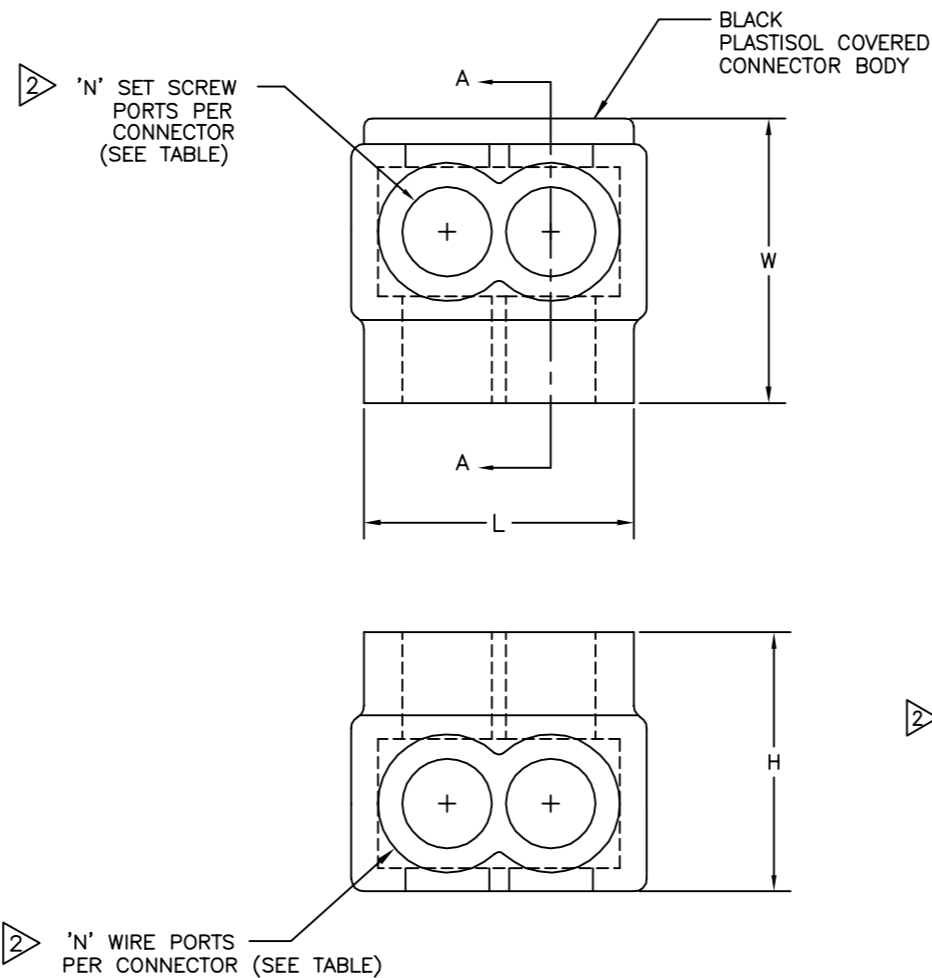

**NOTES:**

- THIS DRAWING TO BE INTERPRETED PER ANSI Y14.5M.
- END CAPS INSTALLED ON WIRE PORTS AND SET SCREW PORTS.
- ALL CONNECTORS UL LISTED, CSA CERTIFIED FOR AL9CU, 90°C APPLICATIONS, UNLESS OTHERWISE NOTED.
- DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
- UV RATED MATERIAL.

TO ORDER BURNDY® PRODUCTS CALL		UNITED STATES: 1-800-346-4175 (LONDONDERRY, NH)		CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		FOR PRODUCT INFO: <a href="http://www.burndy.com">http://www.burndy.com</a>	
UV BLACK COVERED DISTRIBUTION CONNECTORS							
ITEM NO: N/A							
CAT NO: 1PL--SERIES (TABLE)							
SCALE: N/A		DRAWN BY: D RAJKUMAR 4/24/02		CHECKER: K HENRY 5/23/02		DSN APPVL: G DITROIA 3/6/02	
MFG APPVL: T BONINA 2/27/02		QC APPVL: J BRODEUR 3/5/02		MKT APPVL: A ZWIT 2/27/02		DRAWING NO	
PROD FAM: --		PROJECT #: --		DOCUMENT TYPE: Sales		REL LEVEL: AutoCAD	
				SIZE		REV	
				D		SD214514	
						SHEET 1 OF 13	
						C	

