HUBBELL
Wiring Device-Kellems

Locking Devices, Twist-Lock®, Industrial, Receptacle, 50A 3-Phase Delta 250V AC, 3-Pole 4-Wire Grounding, Non-NEMA, Screw Terminal, Black

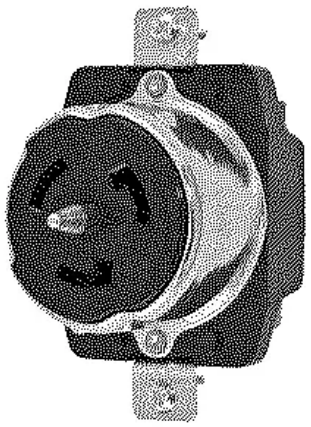

By Hubbell Wiring Device-Kellems
Catalog # CS8369

Locking Devices, Twist-Lock®, Industrial, Receptacle, 50A 3-Phase Delta 250V AC, 3-Pole 4-Wire Grounding, Non-NEMA, Screw Terminal, Black

Features

- Thermoset construction offers high heat resistance
- Armored housing provides superior impact resistance
- One piece contacts provide low operating temperatures

Performance

- Electrical - Current Interrupting - Certified for current interrupting at full rated current
- Electrical - Dielectric Voltage - Withstands 2,000V minimum
- Environmental - Flammability - UL 94 V0
- Environmental - Operating Temperatures - Maximum continuous 75°C minimum –40°C (w/o impact)
- Mechanical - Terminal Accommodation - #10 AWG - #6 AWG solid or stranded copper wire only

General

Catalog Number	CS8369
EU RoHS Indicator	No
Environmental Conditions	Indoor Dry Unless Protected By Additional Means
Item Type	Receptacles
Material	Phenolic
Material - Mounting Hardware	Screw Mounting
Number Of Poles	3-Pole
OEM Brand Name	Hubbell Wiring Device-Kellems
Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Specifications	• Body - Phenolic • Contacts - Brass • Face - Phenolic • Insulator - Phenolic • Terminal Screws - Steel
Type	Receptacle
UPC	783585829074

Dimensions

Dimensions	2.69 in x 2.12 in x 2.36 in
Display Size	Standard Sized Product
Height	2.36 in
Length	2.69 in
Weight	0.75 lb
Width	2.12 in

Electrical Ratings

Amperage Rating	50 A
Connectivity	Screw Terminals
Current / Amperage Rating	50 A
Current Rating	50 A
Dielectric Strength	Withstands 2,000V minimum
Phase	Three Phase
Voltage Rating	3-Phase Delta 250 VAC
Voltage Rating Description	3-Phase Delta 250 VAC

Conductor Related

Number Of Wires	4-Wire
Wire Size	#10 AWG to #6 AWG

Certifications And Compliance

Buy America(n) Qualified	• BABA Compliant (All status valid till December 2025) • TAA Compliant (All status valid till December 2025)
Industry Standard(s)	• Certified to CSA C22.2 No.42 • Listed to UL 498 • WR Rating

Logistics

Carton Quantity	10
Pallet Quantity	1680

Product Assets

Catalog Page - WDK B-57 Catalog Page
Catalogs - WDK Catalog Full 2024

Literature - Food Processing Guide
Literature - 50 Amp Twist-Lock® Devices
Literature - Wiring Device Solutions for Strategic Manufacturing Facilities
Literature - Emergency Preparedness for Healthcare

Sales Drawings - WDK_CS8369_DRAWING_PDF
Specifications - Wiring CS8369 Specification Sheet
Warranty - Industrial & Commercial Products
Video - Insulgrip Twist-Lock and Straight Blade Devices
Video - Twist-Lock Devices

A Hubbell brand

©2025 Hubbell Incorporated. All rights reserved
WDK-CS8369-SPEC-EN | REV 6/2025