Catalog Number	
Notes	
Type	

FEATURES & SPECIFICATIONS

INTENDED USE — The Lithonia Lighting JEBL LED High bay is an affordable LED solution for users who prefer a luminaire with the look and feel of a round form factor. The JEBL delivers comfortable and uniform lighting from mounting heights up to 30ft. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate. Click here for Acrylic and Polycarbonate Environmental Compatibility table for suitable uses. Certain airborne contaminants may adversely affect the functioning of LEDs and other electronic components, depending on various factors such as concentrations of the contaminants, ventilation, and temperature at the end-user location. Click here for a list of substances that may not be suitable for interaction with LEDs and other electronic components.**

CONSTRUCTION — JEBL features a white die-cast aluminum housing along with a removable die-cast aluminum driver housing. Powder coat corrosion resistant finish provides 500 hours salt fog rating. Corrosion resistant external hardware standard. Optional clear polycarbonate or diffuse aluminum reflectors available separately.

OPTICS — A .16" thick clear tempered glass lens protects LEDs. Placement, spacing, and aperture of LEDs provides a 120 degree spread of light. Optional frosted glass and polycarbonate solutions available.

ELECTRICAL — High-efficiency LEDs. 0-10V dimming standard for a dimming range of 100% to 10%. Input voltage is MVOLT (120-277V) and HVOLT (347-480V). Suitable for 50/60Hz.

Luminaire Surge Protection Level: Designed to withstand up to 6kV/3kA per ANSI C82.77-5-2015.

L90 > 54,000 hours.

CONTROLS — Dimming and non-dimming sensors, along with nLightAIR, may be factory installed utilizing the wiring box accessory that is attached to the top of the fixture.

INSTALLATION — 1/4" NPT eye bolt with 1/2" thick loop and 6' cord with dimming lead provided for easy installation. 3/4" reducer available for stem or hook mounting. Optional surface mount bracket allows flexibility by adjusting in 15 degree increments for a total range of 150 degrees. Also capable of accepting 3/4" stem or hook.

LISTINGS — UL/C-UL listed to US and Canadian Safety Standards. Wet location listed. For use under covered ceilings. For use in ambient temperatures from -40°F (-40°C) to 131°F (55°C see operational data). IP65 rated. NSF Splash Zone 2 and Non-Food Zone rated.

DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:
www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.
All values are design or typical values, measured under laboratory conditions at 25 °C.
Specifications subject to change without notice.

LED High Bay

JEBL

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

LED High Bay

A+ Capable options indicated by this color background.

Looking for Contractor Select readily available configurations? Click here to visit Contractor Select™ spec sheet or go to www.contractorselect.com

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative.

Example: JEBL 18000LM GL MVOLT 40K 80CRI DWHXD

Series	Lumens		Lens		Voltage		Color Temperature		Color Rendering Index		Mounting	
JEBL	12000LM	12,000 lumens	GL	Glass lens	MVOLT	(120-277V)	40K	4000 K	80CRI	80 CRI	(blank)	standard eyebolt
	18000LM	18,000 lumens	FRGL	Frosted Glass lens	HVOLT	(347-480V)	50K	5000 K			PM	Pendant mount, 3/4 adapter installed
	24000LM	24,000 lumens	PFL	Frosted Polycarbonate lens	120	120V						
	30000LM	30,000 lumens			208	208V						
					240	240V						
					277	277V						
					347	347V						
					480	480V						

Options

WGX	wire guard installed
SMB	Surface mount bracket ‡
WBF	Wiring box required for sensor and cord attachment, factory installed
SCF120	Safety cable 120"
SCF240	Safety cable 240"
HKM	Hook, male, damp location ‡
HKF	Hook, female, damp location ‡
LPM	Loop, male, damp location ‡
LPF	Loop, female, damp location ‡
Cordsets:	
HC3PC3RWT	Wet location, hook, 3' cord, plug and receptacle ‡
OCS	RELOC® OnePass® selectable cable 6' installed (dry location labeled) ‡
OCU	RELOC® OnePass® unselectable cable 6' installed (must specify tap position) (dry location labeled) ‡
CS88	Brad Harrison 3P male straight 600V molded plug, 6' type STOOW yellow PVC cord, 16/3, must specify voltage, wet location ‡
CS88L12	Brad Harrison 3P male straight 600V molded plug, 12' type STOOW yellow PVC cord, 16/3, must specify voltage, wet location ‡
CS89L12	12' white cord, 16/3, no plug, wet location ‡
CS6G16STOW5D	6' white cord, 16/5, no plug, includes low voltage dimming wires, wet location ‡
C6PW	6' white cord with NEMA twist lock plug, wet location ‡
C12PW	12' white cord with NEMA twist lock plug, wet location ‡
L/DIM	less dimming cord ‡

Controls: ‡

Non -Dimming Sensors:

SBOR10	360° motion sensor integral, low bay 8-15 ft., on/off, IP66 rated. SBOR spec sheet
SBOR10 P	360° motion sensor integral with photocell & occupancy sensor, low bay 8-15 ft., on/off, IP66 rated. SBOR spec sheet
SBOR6	360° motion sensor integral, high bay 15-30 ft., on/off, IP66 rated. SBOR spec sheet
SBOR6 P	360° motion sensor integral with photocell & occupancy sensor, high bay 15-30 ft., on/off, IP66 rated. SBOR spec sheet

Dimming Sensors:

SBOR10 D 3V	360° motion sensor integral, low bay 8-15 ft., on/off with second time-out period, goes to a dimmed state before turning off max./min. Dim setting, IP66 rated. SBOR spec sheet
SBOR6 D 3V	motion sensor integral, high bay 15-30 ft., on/off with second time-out period, goes to a dimmed state before turning off max./min. Dim setting, IP66 rated. SBOR spec sheet

nLight wireless: ‡

NLTAIR2 RSBOR6	nLight AIR Generation 2 enabled 360°high mount motion sensor
NLTAIR2 RSBOR10	nLight AIR Generation 2 enabled 360° low mount motion sensor

Finish

DWHXD	Super durable, white
DBLXD	Super durable, black

NOTE: ‡ indicates option chosen has ordering restrictions. Please reference ordering restrictions chart below. Options are sorted alphabetically.

Accessories: *Order as separate catalog number.*

JEBLPCLR1 M4	Polycarbonate clear reflector for 12L and 18L
JEBLDALR1 M4	Diffuse Aluminum reflector for 12L and 18L
JEBLPCLR2 M4	Polycarbonate clear reflector for 24L and 30L
JEBLDALR2 M4	Diffuse Aluminum reflector for 24L and 30L
JEBLMTG ADAPTER M12	3/4" reducer
JEBLSMB1 M6	Surface mount bracket for 12L and 18L
JEBLSMB2 M6	Surface mount bracket for 24L and 30L
JEBLSMB1DBLXD	Black surface mount bracket for 12L and 18L
JEBLSMB2DBLXD	Black surface mount bracket for 24L and 30L
JCBLSC120	Safety cable 120"
JCBLSC240	Safety cable 240"
JEBLWG1 M6	Wire guard for use with 12000LM or 18000LM fixtures
JEBLWG2 M6	Wire guard for use with 24000LM or 30000LM fixtures

‡ Option Value Ordering Restrictions

Option value	Restriction
C12PW	Not available with MVOLT or HVOLT. Requires WBF option. If black cord is required remove "W". EX: C12P
C6PW	Not available with MVOLT or HVOLT. If black cord is required remove "W". EX: C6P. Black cord ships standard when DBLXD is ordered.
Controls	Require WBF option.
CS6G16STOW5D	Not available with SBOR10 D 3V, SBOR6 D 3V, SBOR10 P, SBOR6 P, or any NLTAIR@ sensor. Requires WBF option.
CS88	Requires WBF option.
CS88L12	Requires WBF option.
CS89L12	Requires WBF option.
HC3PC3RWT	PM option required. Not available with MVOLT or HVOLT. Requires WBF option.
HKF	PM option required
HKM	PM option required
L/DIM	Select this option when original dimming cord is not required. If this option is selected there will be no access to dimming leads. When L/DIM is ordered without an option requiring the wiring box, it will resort to a damp location listing.
LPF	PM option required
LPM	PM option required
nLight wireless	Normal luminaires (non-emergency) can be used as a normal power sensing device for nearby nLight AIR devices and luminaires with EM emergency options.
OCS	Not available with MVOLT or HVOLT. Requires WBF option. Available also in 10', 15', and 20'. EX: OCS15
OCU_	Not available with MVOLT or HVOLT. Requires WBF option.
SMB	Bracket finish will match finish of fixture.

INDUSTRAL: One Lithonia Way, Conyers, GA 30012 Phone: 1-800-705-SERV (7378) www.lithonia.com

© 2018-2022 Acuity Brands Lighting, Inc. All rights reserved. Rev. 06/06/22

ACCESSORIES



JEBLDALR



JEBLPCLR

JEBL with DALR

Hook with 3/4" adapter

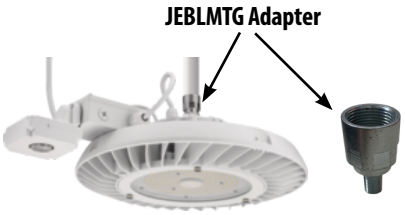

OPERATIONAL DATA

Lumen package	Voltage	Reflector	CCT	CRI	Nominal lumens			Wattage
					Lens type			
					GL	FRGL	PFL	
12000LM	MVOLT	No reflector	40K	80CRI	13630	11703	11581	95
			50K		13790	11840	11717	
		DALR	40K		12565	11047	10770	
			50K		12713	11176	10896	
		PCLR	40K		13025	11239	11205	
			50K		13178	11371	11336	
	HVOLT	No reflector	40K		13285	11407	11289	92
			50K		13381	11489	11370	
		DALR	40K		12248	10767	10497	
			50K		12337	10845	10573	
		PCLR	40K		12696	10955	10922	
			50K		12787	11034	11000	
18000LM	MVOLT	No reflector	40K		19303	16574	16402	135
			50K		19529	16765	16594	
		DALR	40K		17796	15644	15252	
			50K		18005	15828	15431	
		PCLR	40K		18446	15917	15869	
			50K		18662	16104	16055	
	HVOLT	No reflector	40K		19679	16897	16722	136
			50K		19821	17018	16842	
		DALR	40K		18143	15949	15549	
			50K		18274	16064	15661	
		PCLR	40K		18806	16227	16178	
			50K		18941	16344	16295	
24000LM	MVOLT	No reflector	40K		24181	20762	20547	174
			50K		24464	21006	20788	
		DALR	40K		22294	19598	19107	
			50K		22555	19828	19331	
		PCLR	40K		23108	19940	19879	
			50K		23379	20174	20112	
	HVOLT	No reflector	40K		26558	22803	22566	181
			50K		26749	22967	22729	
		DALR	40K		24485	21524	20985	
			50K		24661	21679	21136	
		PCLR	40K		25379	21900	21833	
			50K		25561	22057	21990	
30000LM	MVOLT	No reflector	40K		30263	25984	25715	215
			50K		30618	26289	26016	
		DALR	40K		27901	24527	23912	
			50K		28228	24815	24193	
		PCLR	40K		28920	24955	24879	
			50K		29259	25248	25171	
	HVOLT	No reflector	40K		31421	26979	26699	218
			50K		31647	27173	26891	
		DALR	40K		28969	25466	24828	
			50K		29178	25649	25006	
		PCLR	40K		30027	25910	25832	
			50K		30243	26097	26017	

© 2018-2022 Acuity Brands Lighting, Inc. All rights reserved.

DIMENSIONS

All dimensions are in inches
unless otherwise indicated.

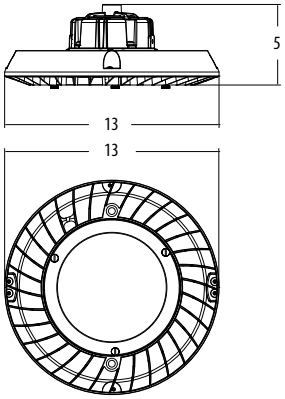



JEBL 12L/18L

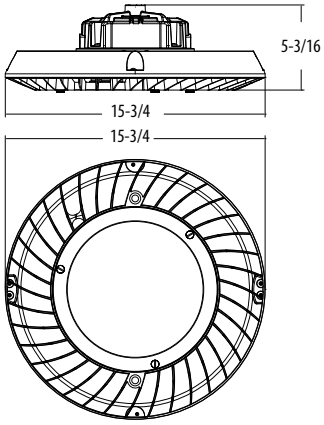



JEBL 24L/30L





JEBLDARL1

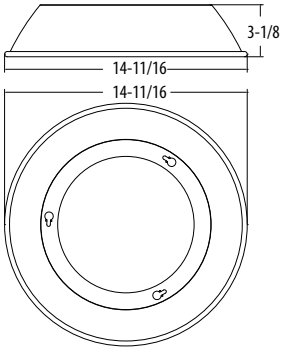



JEBLDARL2





JEBLPCLR1

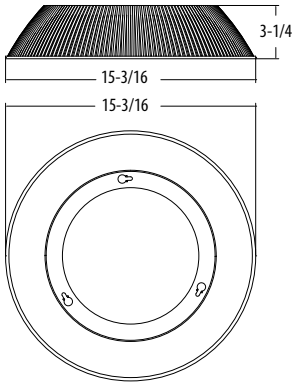



JEBLPCLR2





JEBLSMB1



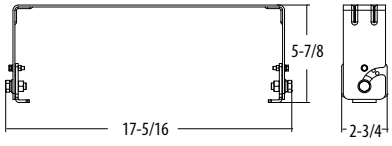

JEBLSMB2

© 2018-2022 Acuity Brands Lighting, Inc. All rights reserved.