LITHONIA LIGHTING®

| Catalog Number | |
|---|---|
| Notes | |
| Type | |

Decorative Indoor

# Lacuna
## LED Flush Mount

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

### CONSTRUCTION

Timeless design mixes a solid brushed aluminum exterior with a matte white acrylic diffuser for a great look in any setting or decor.

### OPTICS

Produces 1,400 lumens at 50,000 hours of life.

### ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 24 watts, 58 lumens per watt.

Works with most standard incandescent dimmers (see list of suggested dimmers).

### INSTALLATION

All mounting hardware included for mounting to a standard junction box.

### LISTINGS

UL Listed to US and Canadian standards and suitable for damp locations. ENERGY STAR® certified.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

**NOTE**: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.




*Specifications*

Depth: 3-3/8 (8.6)
Diameter: 14 (35.6)
Weight: 3 lbs.

All dimensions are inches (centimeters) unless otherwise indicated.

**ORDERING INFORMATION** For shortest lead times, configure product using **bolded options.**

**Example:** FMLACL 14 20830 BA

| Series | | Module/CRI | | Color temperature | | Finish | |
|---|---|---|---|---|---|---|---|
| **FMLACL 14** | LED flush mount 14" diameter | **208** | >80 | **40** | 4000K | **BA** | Brushed aluminum |
| | | | | **30** | 3000K | | |

## PHOTOMETRICS

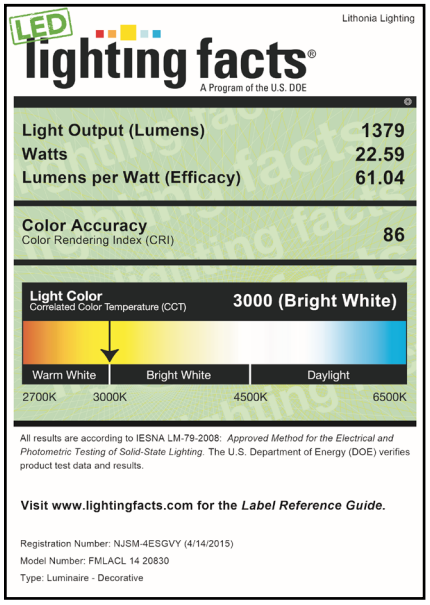


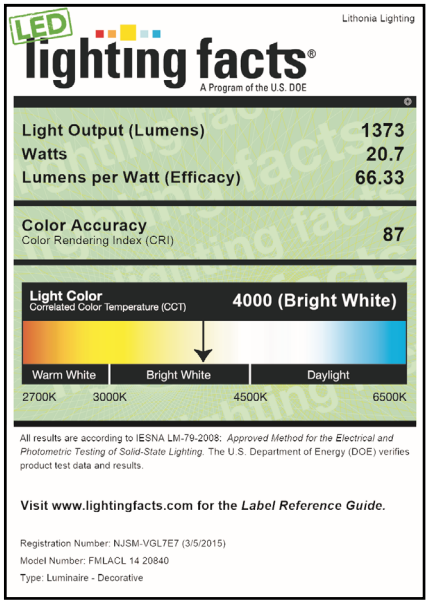


| SUGGESTED DIMMERS | |
|---|---|
| The FMLACL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility. | |
| **Manufacturer** | **Part number(s)** |
| Leviton | 6633P |
| | IPL06 |
| | 6674P |
| | IPE04 |
| | Trimatron 600W |
| Lutron | DVELV 300P |
| | Skylark 300P |
| | NTELV 300 |
| | NLV 600 |
| Synergy | ISD 600 I 120 |

 © 2014-2022 Acuity Brands Lighting, Inc. All rights reserved. 