

3M™ SLiC™ Fiber Aerial Terminal Closure 530 Internal Drop Terminations for Direct Spliced Drops

The 3M™ SLiC™ Fiber Aerial Terminal Closure 530 with Internal Drop Termination is an aerial, strand-mount, free-breathing (breathable) fiber terminal for FTTP (fiber to the premises) applications. It can be used for inline, taut sheath, and butt splicing configurations.

The SLiC 530 terminal closure is comprised of two separate chambers: a distribution cable splice chamber and a drop termination chamber. The distribution cable splice chamber houses the fiber splices and stores buffer tube or ribbon fiber slack while the drop termination chamber is used to house all drop terminations.


This craft separation feature allows the installer (I&R craftsman) to terminate and maintain the drop without entering the splice chamber. Also, the terminal box is equipped with tabs which allow the terminal box to be locked to provide greater network security.

The SLiC 530 accommodates 4, 6, 8, or 12 direct fusion or mechanical spliced drop terminations. A direct spliced drop termination requires that the distribution fiber be spliced to the drop fiber. For mechanical spliced drop terminations, the 3M™ Fibrlok™ Fiber Splice 2529 and 2540G may be used.

The SLiC 530 is designed to Telcordia's GR-771-CORE Issue 1, July 1994, Generic Requirements for Fiber Optic Splice Closures - Free-breathing closures.



3M™ SLiC™ Fiber Aerial Terminal Closure 530 Internal for Direct Spliced Drop Terminations




3M™ External Cable Assembly Module (ECAM) 12mm Drop Entry Kit



3M™ SLiC™ Fiber Splicing Workstation for Aerial Strand Mount Applications

Features	Benefits
One-piece construction	Easy installation and permits access to the cable splice without removing the terminal closure body
Separate splice and drop termination chambers	Allows easy and secure access for service connections and drop maintenance without having to enter the splice chamber
Craft-friendly drop entry system	Permits quick and easy plug and play drop installation with minimal training
Optional lightweight, easy to install splicing workstation	Provides a stable work surface that secures the fusion splicer and cleaver. This helps to simplify the installation and splicing process when splicing on the strand or lift truck.
Double-walled molded construction	Durable protection from bending and cracking in the most extreme environments
Few loose parts	Limited number of components needed to install the terminal closure, thus decreasing the installation time
Multiple splicing applications	Accommodates in-line, butt, and taut-sheath applications. Allows for up to 96 single fusion or 288 mass fusion branch splicing.
Spacious fiber management area	Slack storage basket provides separate area for routing, protecting, and “expressing” buffer tubes and ribbon fibers
No special tools required	Easy installation and re-entry
Interlocking ends	Permits the closure chamber to be extended to protect damaged sheath or accommodate larger openings for taut sheath applications

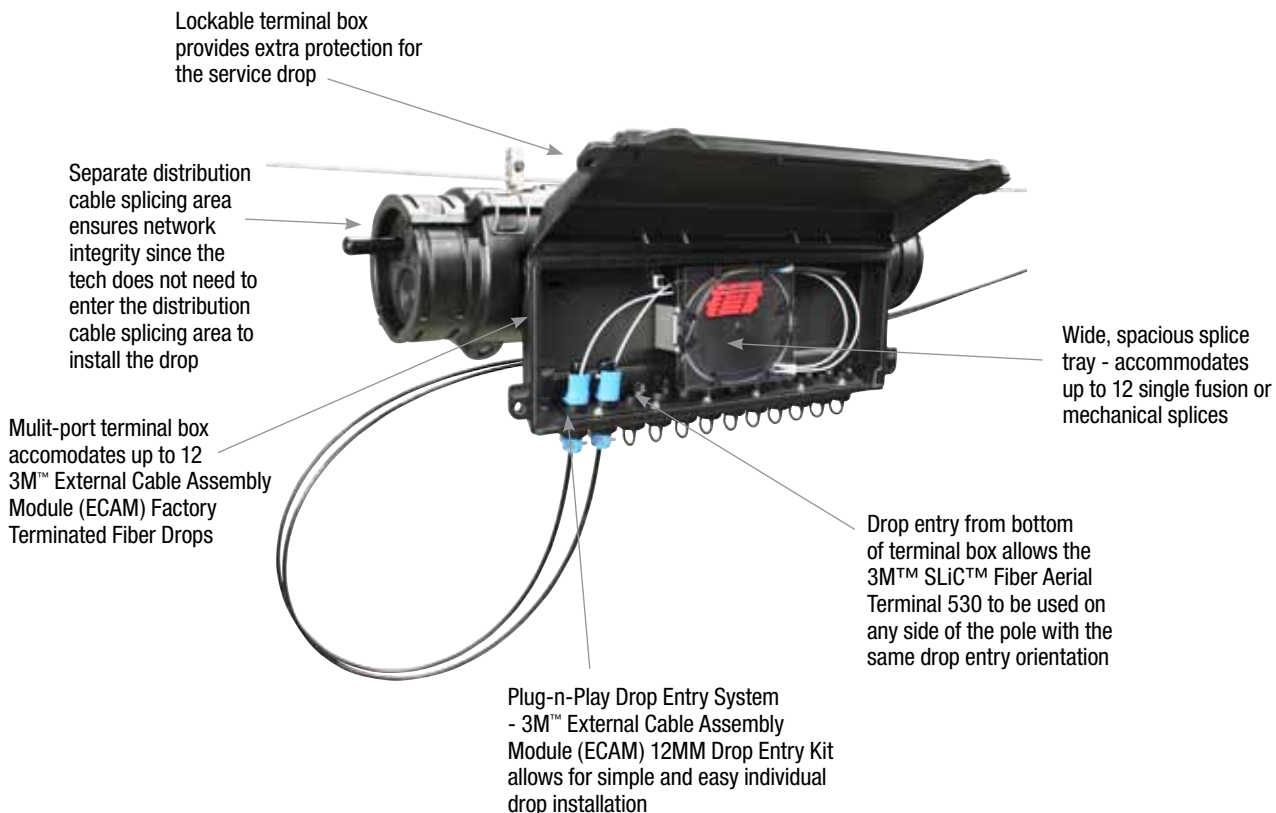

Specifications

Feature	3M™ SLiC™ Fiber Aerial Terminal Closure 530 Internal with Direct Spliced Drops
Dimensions (L x H x W) mm (in.)	762 x 264 x 218 (30 x 10.4 x 8.6)
Cable entry ports and size	4 ports—2 ports per end: 5 - 36 mm (0.2–1.4")
Taut-sheath application	Yes; 20" sheath opening
Splice tray included for drop terminations	1—3M™ Fiber Optic Splice Tray 2527
Branch splice capacity	2 trays with 96 single fusion/288 mass fusion splices
Cables accommodated	LBT single fiber Central tube single and ribbon fiber Armored & dielectric
Number of drop terminations and connector/splice type	Single fusion spliced drops 3.0mm x 60mm—12 Single mechanical spliced drops 3M™ Fibrlok™ II Universal Optical Fiber Splice 2529 3M™ Fibrlok™ 250µm Fiber Splice 2540G
Type of drop	Round drop: 4–12 mm (0.15–0.47") Flat drop: (0.32" x 0.18") Armored & dielectric
Drop installation kit	3M™ External Cable Assembly Module (ECAM)—12mm-Flat 3M™ External Cable Assembly Module—12 mm-Round-5/8mm
Drop entry	Bottom of the terminal box
Splitters	Factory-installed 1x4 or 1x8 3M™ Planar Light Circuit (PLC) Splitters
Extendible for taut-sheath and repair splices	Yes
Craft separation	Separate enclosure for splicing and separate enclosure for terminations
Extendable/offset hanging brackets	Supplied as an accessory and/or equipped with the terminal
Generic requirements for fiber optic splice closures (environmental, chemical, and mechanical)	GR-771 for free-breathing (modified for PFOC)

Ordering Information

SLFT	XXX	X	XX	XX	XXXX	XXX	X												
<table><tr><th>Size</th></tr><tr><td>530 5" x 30"</td></tr></table>		Size	530 5" x 30"																
Size																			
530 5" x 30"																			
<table><tr><th>Terminal Box Type</th></tr><tr><td>B ECAM Drop Port Entry, Bottom; 8-port</td></tr><tr><td>C ECAM Drop Port Entry, Bottom; 12-port</td></tr><tr><td>D HFOC (Hardened Fiber Optic Connector), Bottom Entry</td></tr></table>		Terminal Box Type	B ECAM Drop Port Entry, Bottom; 8-port	C ECAM Drop Port Entry, Bottom; 12-port	D HFOC (Hardened Fiber Optic Connector), Bottom Entry														
Terminal Box Type																			
B ECAM Drop Port Entry, Bottom; 8-port																			
C ECAM Drop Port Entry, Bottom; 12-port																			
D HFOC (Hardened Fiber Optic Connector), Bottom Entry																			
<table><tr><th>Trays</th></tr><tr><td>0 ...3 # of trays</td></tr><tr><th>Tray Type</th></tr><tr><td>X None</td></tr><tr><td>A 2527</td></tr><tr><td>B 2527-48-DF</td></tr></table>		Trays	0 ...3 # of trays	Tray Type	X None	A 2527	B 2527-48-DF												
Trays																			
0 ...3 # of trays																			
Tray Type																			
X None																			
A 2527																			
B 2527-48-DF																			
<table><tr><th>Connectors</th></tr><tr><td>0 ...12 # of connectors</td></tr><tr><td>for HFOC, ECAM FD, Field Terminated, & Pigtail Spliced Drops</td></tr><tr><th>Direct Spliced Applications</th></tr><tr><td>DS Direct Spliced Drops</td></tr></table>		Connectors	0 ...12 # of connectors	for HFOC, ECAM FD, Field Terminated, & Pigtail Spliced Drops	Direct Spliced Applications	DS Direct Spliced Drops													
Connectors																			
0 ...12 # of connectors																			
for HFOC, ECAM FD, Field Terminated, & Pigtail Spliced Drops																			
Direct Spliced Applications																			
DS Direct Spliced Drops																			
						<table><tr><th>Special Feature</th></tr><tr><td>T Taut Sheath</td></tr><tr><td>R RUS</td></tr><tr><td>P Pigtail Splice</td></tr></table>		Special Feature	T Taut Sheath	R RUS	P Pigtail Splice								
Special Feature																			
T Taut Sheath																			
R RUS																			
P Pigtail Splice																			
						<table><tr><th>Splitters (Qty, Type, Input/Output Fibers)</th></tr><tr><td>N None</td></tr><tr><td>A 1, 1 x 4 PLC, Input Spliced/Output Connectorized</td></tr><tr><td>B 1, 1 x 8 PLC, Input Spliced/Output Connectorized</td></tr><tr><td>C 1, 1 x 4 PLC, Input/Output Spliced (DS only)</td></tr><tr><td>D 1, 1 x 8 PLC, Input/Output Spliced (DS only)</td></tr></table>		Splitters (Qty, Type, Input/Output Fibers)	N None	A 1, 1 x 4 PLC, Input Spliced/Output Connectorized	B 1, 1 x 8 PLC, Input Spliced/Output Connectorized	C 1, 1 x 4 PLC, Input/Output Spliced (DS only)	D 1, 1 x 8 PLC, Input/Output Spliced (DS only)						
Splitters (Qty, Type, Input/Output Fibers)																			
N None																			
A 1, 1 x 4 PLC, Input Spliced/Output Connectorized																			
B 1, 1 x 8 PLC, Input Spliced/Output Connectorized																			
C 1, 1 x 4 PLC, Input/Output Spliced (DS only)																			
D 1, 1 x 8 PLC, Input/Output Spliced (DS only)																			
						<table><tr><th>Connector Type</th></tr><tr><td>XX None EP SC/APC</td></tr><tr><td>DA SC/UPC DW LC/APC</td></tr><tr><td>DV LC/UPC </td></tr><tr><th>External Adapter</th></tr><tr><td>X None</td></tr><tr><td>A External Adapter</td></tr><tr><td>B External Adapter (RUS/OUS)</td></tr><tr><th>Fiber Pigtail Style</th></tr><tr><td>X Not applicable</td></tr><tr><td>A 900 µm loose buffer tube, 1 meter</td></tr><tr><td>C 250 µm ribbon to 900um fanout, 3 meters</td></tr></table>		Connector Type	XX None EP SC/APC	DA SC/UPC DW LC/APC	DV LC/UPC	External Adapter	X None	A External Adapter	B External Adapter (RUS/OUS)	Fiber Pigtail Style	X Not applicable	A 900 µm loose buffer tube, 1 meter	C 250 µm ribbon to 900um fanout, 3 meters
Connector Type																			
XX None EP SC/APC																			
DA SC/UPC DW LC/APC																			
DV LC/UPC																			
External Adapter																			
X None																			
A External Adapter																			
B External Adapter (RUS/OUS)																			
Fiber Pigtail Style																			
X Not applicable																			
A 900 µm loose buffer tube, 1 meter																			
C 250 µm ribbon to 900um fanout, 3 meters																			

Accessories




3M™ Offset Hanger Bracket AC-HB4




3M™ Fiber Optic Splice Tray 2527



3M™ Fiber Optic Splice Tray 2532

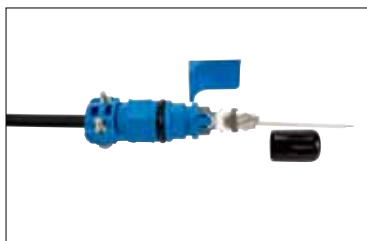

3M™ External Cable Assembly Module (ECAM) 12 mm-flat

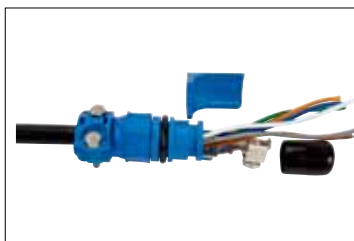

3M™ External Cable Assembly Module (ECAM) 12 mm-round

3M™ SLiC™ Fiber Aerial Terminal Closure 530 Internal for Direct Splice Drops Product Information

Product Number	Product Description	Stock Number	Bill Unit	MOQ
SLFT-530-C-1A-DS	SLiC 530 Aerial Terminal Closure 12 ECAM ports, 1 tray, direct splice drop	80611327349	each	1
SLFT-530-C-1B-DS	SLiC 530 Aerial Terminal Closure 12 ECAM ports, 2527-48-DF Tray, direct splice drop	80611333768	each	1
ECAM-12MM-FLAT-US	12mm ECAM Cable entry for 1 or 2 flat cables	80611326499	each	8
ECAM-12MM-RND-5/8MM	12mm ECAM Cable entry for 5 - 8mm round drop	80611329907	each	8
2170	Fiber optic heat shrink splice sleeve 3.0 x 60.0mm	80610281380	each	50
AC-HB4	Aerial offset hanger bracket 4.0", set	80611314701	sets	10
2527	Fiber splice organizer tray	80611175581	each	2
2521-F-A	3mm single fusion splice insert with adhesive back	80611326325	each	24
2521-FL-A	Ribbon/Fibrlok splice insert with adhesive back	80611326044	each	24
SLFC/T-2-PORT	SLiC 530/533/733 2-port 0.61" cable entry bracket	80611323447	each	2
SLFC/T-6-PORT-FLAT	SLiC fiber 6-port flat drop/cable entry kit	80611317225	each	5
SLIC-ES/5TC/E	SLiC closure 5" rubber end seal 3-port, version E	80611316540	each	5
SLFC/SLFT-SPLICING-WS	SLiC fiber splicing workstation kit	80611321391	kit	1
SLFC/SLFT-SPLICING-WSCA	SLiC Fiber splicing workstation cleaver arm	80611321896	kit	1
SLFC/SLFT-SPLICING-WS-STRAPS	Splicing workstation straps (set of 2)	80611321995	each	1
SCUPC-900-COL1-4	SC/UPC 900um pigtail kit, colors 1-4	80611320591	kit	1
SCUPC-900-COL5-8	SC/UPC 900um pigtail kit, colors 5-8	80611320609	kit	1
SCUPC-900-COL9-12	SC/UPC 900um pigtail kit, colors 9-12	80611320617	kit	1
SCAPC-900-COL1-4	SC/APC 900um pigtail kit, colors 1-4	80611320567	kit	1
SCAPC-900-COL5-8	SC/APC 900um pigtail kit, colors 5-8	80611320575	kit	1
SCAPC-900-COL9-12	SC/APC 900um pigtail kit, colors 9-12	80611320583	kit	1

3M SLiC and Fibrlok are trademarks of 3M Company.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 12 months from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**



Communications Markets Division 3M Telecommunications

6801 River Place Blvd.
Austin, TX 78726-9000
800/426 8688
Fax 800/426 0329

Please recycle. Printed in U.S.A.
© 3M 2010. All rights reserved.
80-6113-2838-8