

COMMON TOOL ATTACHMENT POINTS

TOOLS UP TO 0.5 KG



TOOLS UP TO 0.9 KG




TOOLS UP TO 2.3 KG



IMPORTANT: Follow all instructions when using Python Safety Attachment Points. Instructions are available online or in the Fall Protection For Tools Pocket Reference Guide

Attachment Points should never interfere with the safe working condition of a tool. Inspect before use.

TOOLS UP TO 15.9 KG

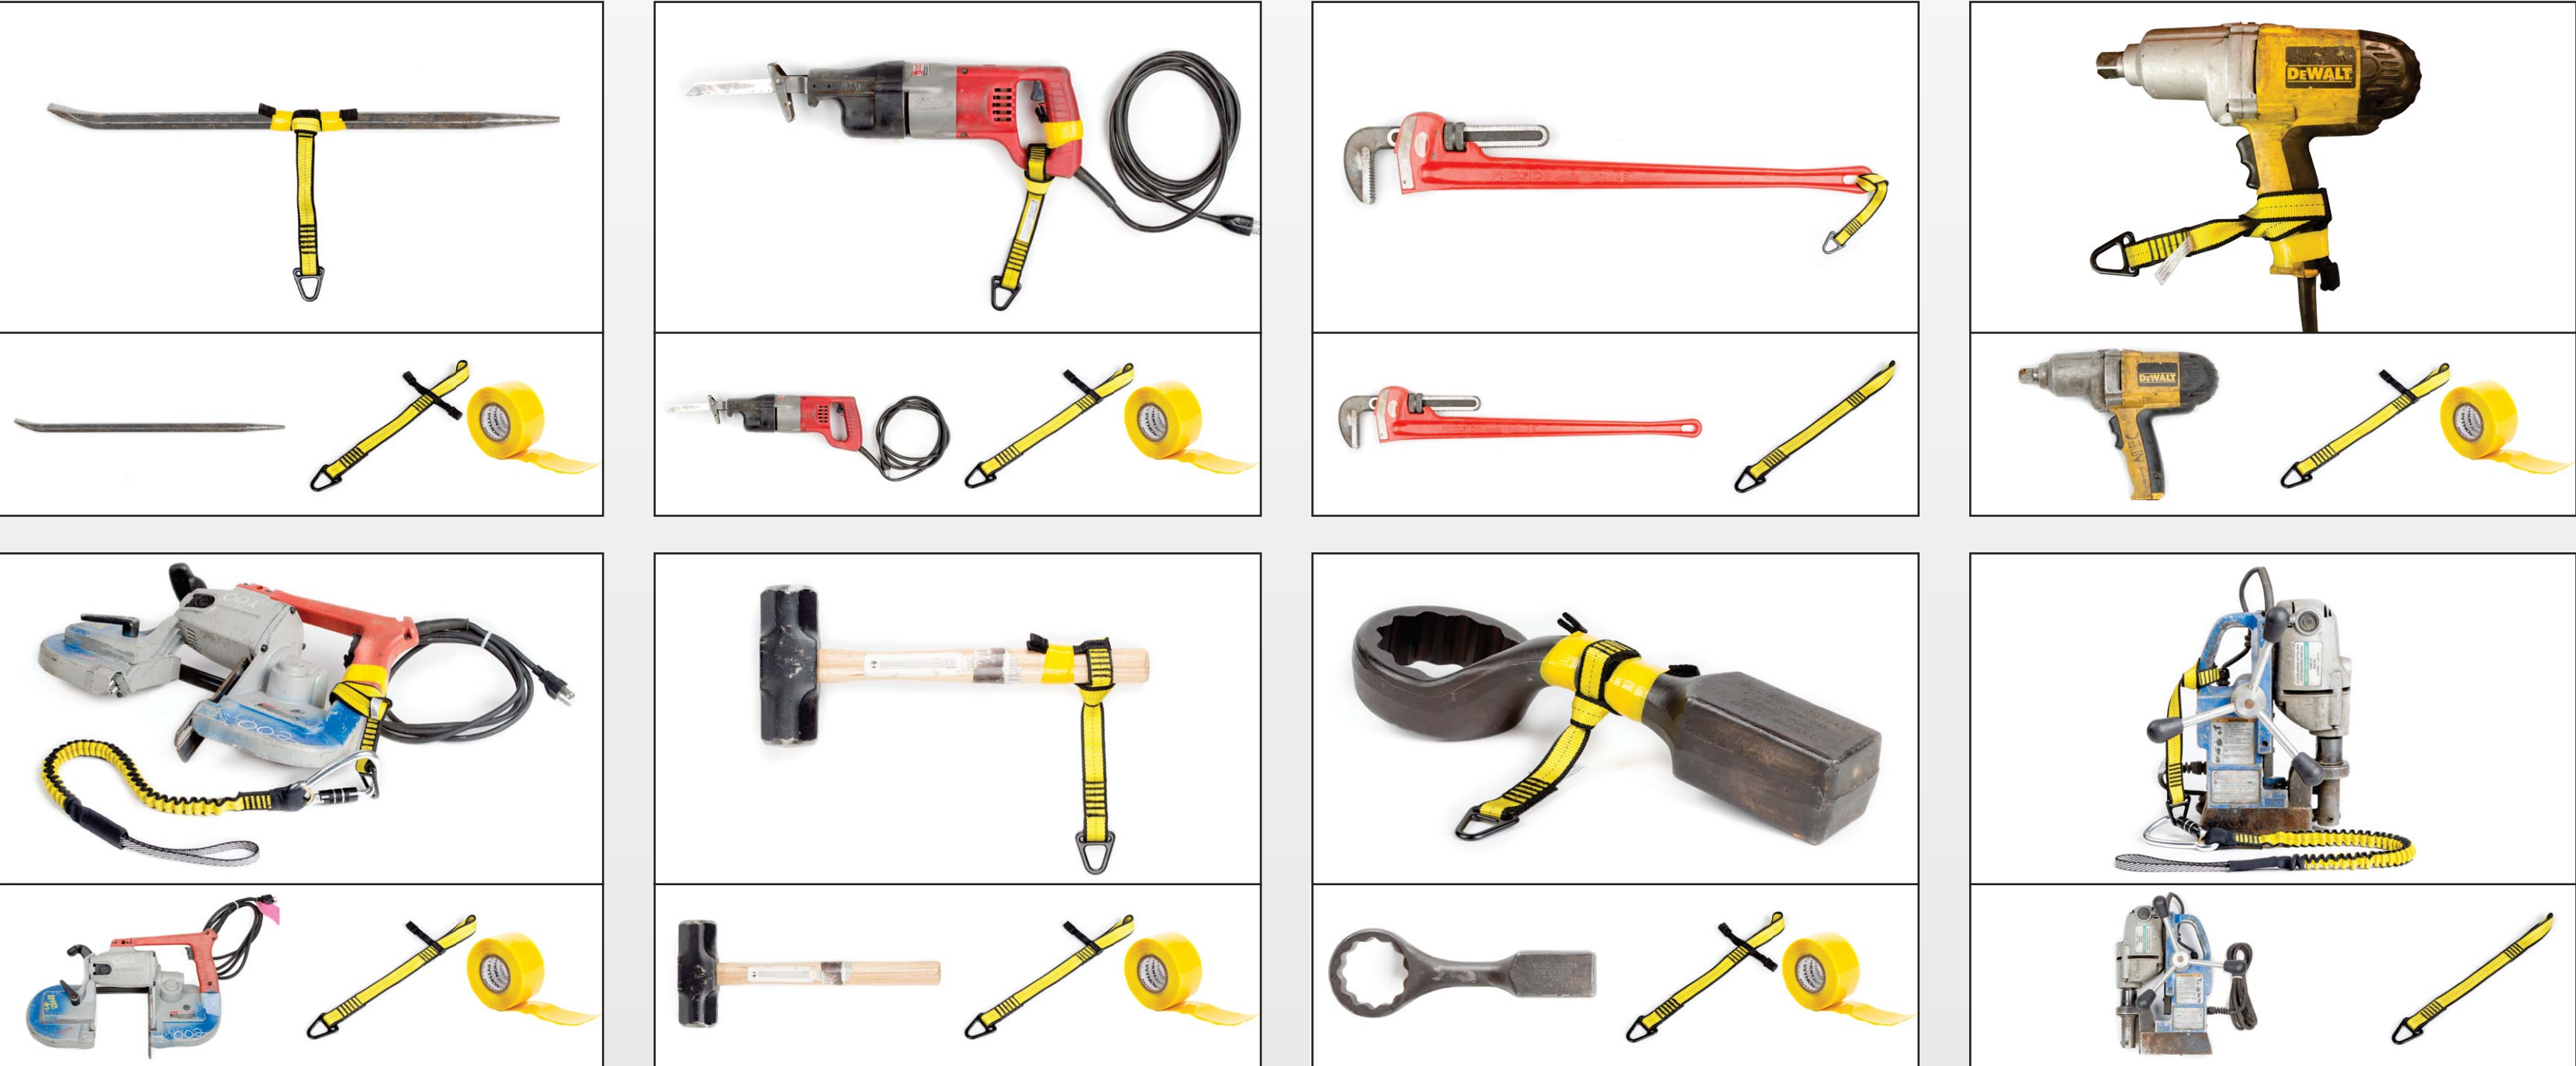

36kg MAX LOAD

Attachment Point Legend

- | | | |
|---|--|--|
|  Micro D-Ring
1500010
0.9 kg load rating only when used with 1500060 |  D-Ring 25 mm x 89 mm
1500007
Load Rating: 2.3 kg |  Tool Cinch Medium Duty Single Wing
1500013
Load Rating: 15.9 kg |
|  Quick Spin
1500027, 1500028, 1500029, 1500030
Load Rating: 0.5 kg |  Quick Wrap Tape 25.4 mm Wide
1500035, 1500041, 1500044 |  Tool Cinch Medium Duty Dual Wing
1500015
Load Rating: 15.9 kg |
|  Quick Ring
1500024, 1500025, 1500026
Load Rating: 0.9 kg |  D-Ring Cord
1500009
Load Rating: 2.3 kg |  Tool Cinch Heavy Duty
1500017
Load Rating: 36.3 kg |
|  D-Ring 13 mm x 57 mm
1500003
Load Rating: 0.9 kg |  Tool Cinch Medium Duty
1500011
Load Rating: 15.9 kg |  Hard Hat Tether
1500061
Load Rating: 0.9 kg |

Protect with Heat Shrink

Heat Shrink can be used to protect Quick Wrap Tape from dust, abrasives, and harsh work environments. Apply Heat Shrink over Attachment Points that use Quick Wrap tape to make them last longer.



Apply a Heat Shrink Link over an attachment point that uses Quick Wrap Tape. Apply heat using a heat gun until the link shrinks completely. Do not burn the Heat Shrink Link.



Let the Heat Shrink Link cool for 5 minutes before use. Remember to always inspect the connection prior to each use for damage or irregularities that might affect the connection.

IMPORTANT! Choose The Correct Tool Lanyard



Up To 2.3 kilograms
Hook2Hook Coil Tether
1500063



Up To 4.5 kilograms
Hook2Loop Bungee Tether
1500047



Up To 15.9 kilograms
Hook2Loop Bungee Tether Medium Duty
1500049



Up To 36.3 kilograms
Hook2Rail Tether Lanyard Heavy Duty
1500052

FALL PROTECTION FOR TOOLS®



capital
SAFETY



GLOBAL LEADER IN
FALL PROTECTION

HEIGHT SAFETY | CONFINED SPACE | INDUSTRIAL RESCUE

AUS: 1800 245 002 | NZ: 0800 212 505

www.capitalsafety.com.au

©2015 Capital Safety