

COMPLIANCE WITHOUT COMPROMISE




capital
SAFETY



**COMPLIANCE PEOPLE
LOVE US.**

**BOSSES BREATHE
EASIER.**

**THE GUYS KNOW WE
HAVE THEIR
BACK.**

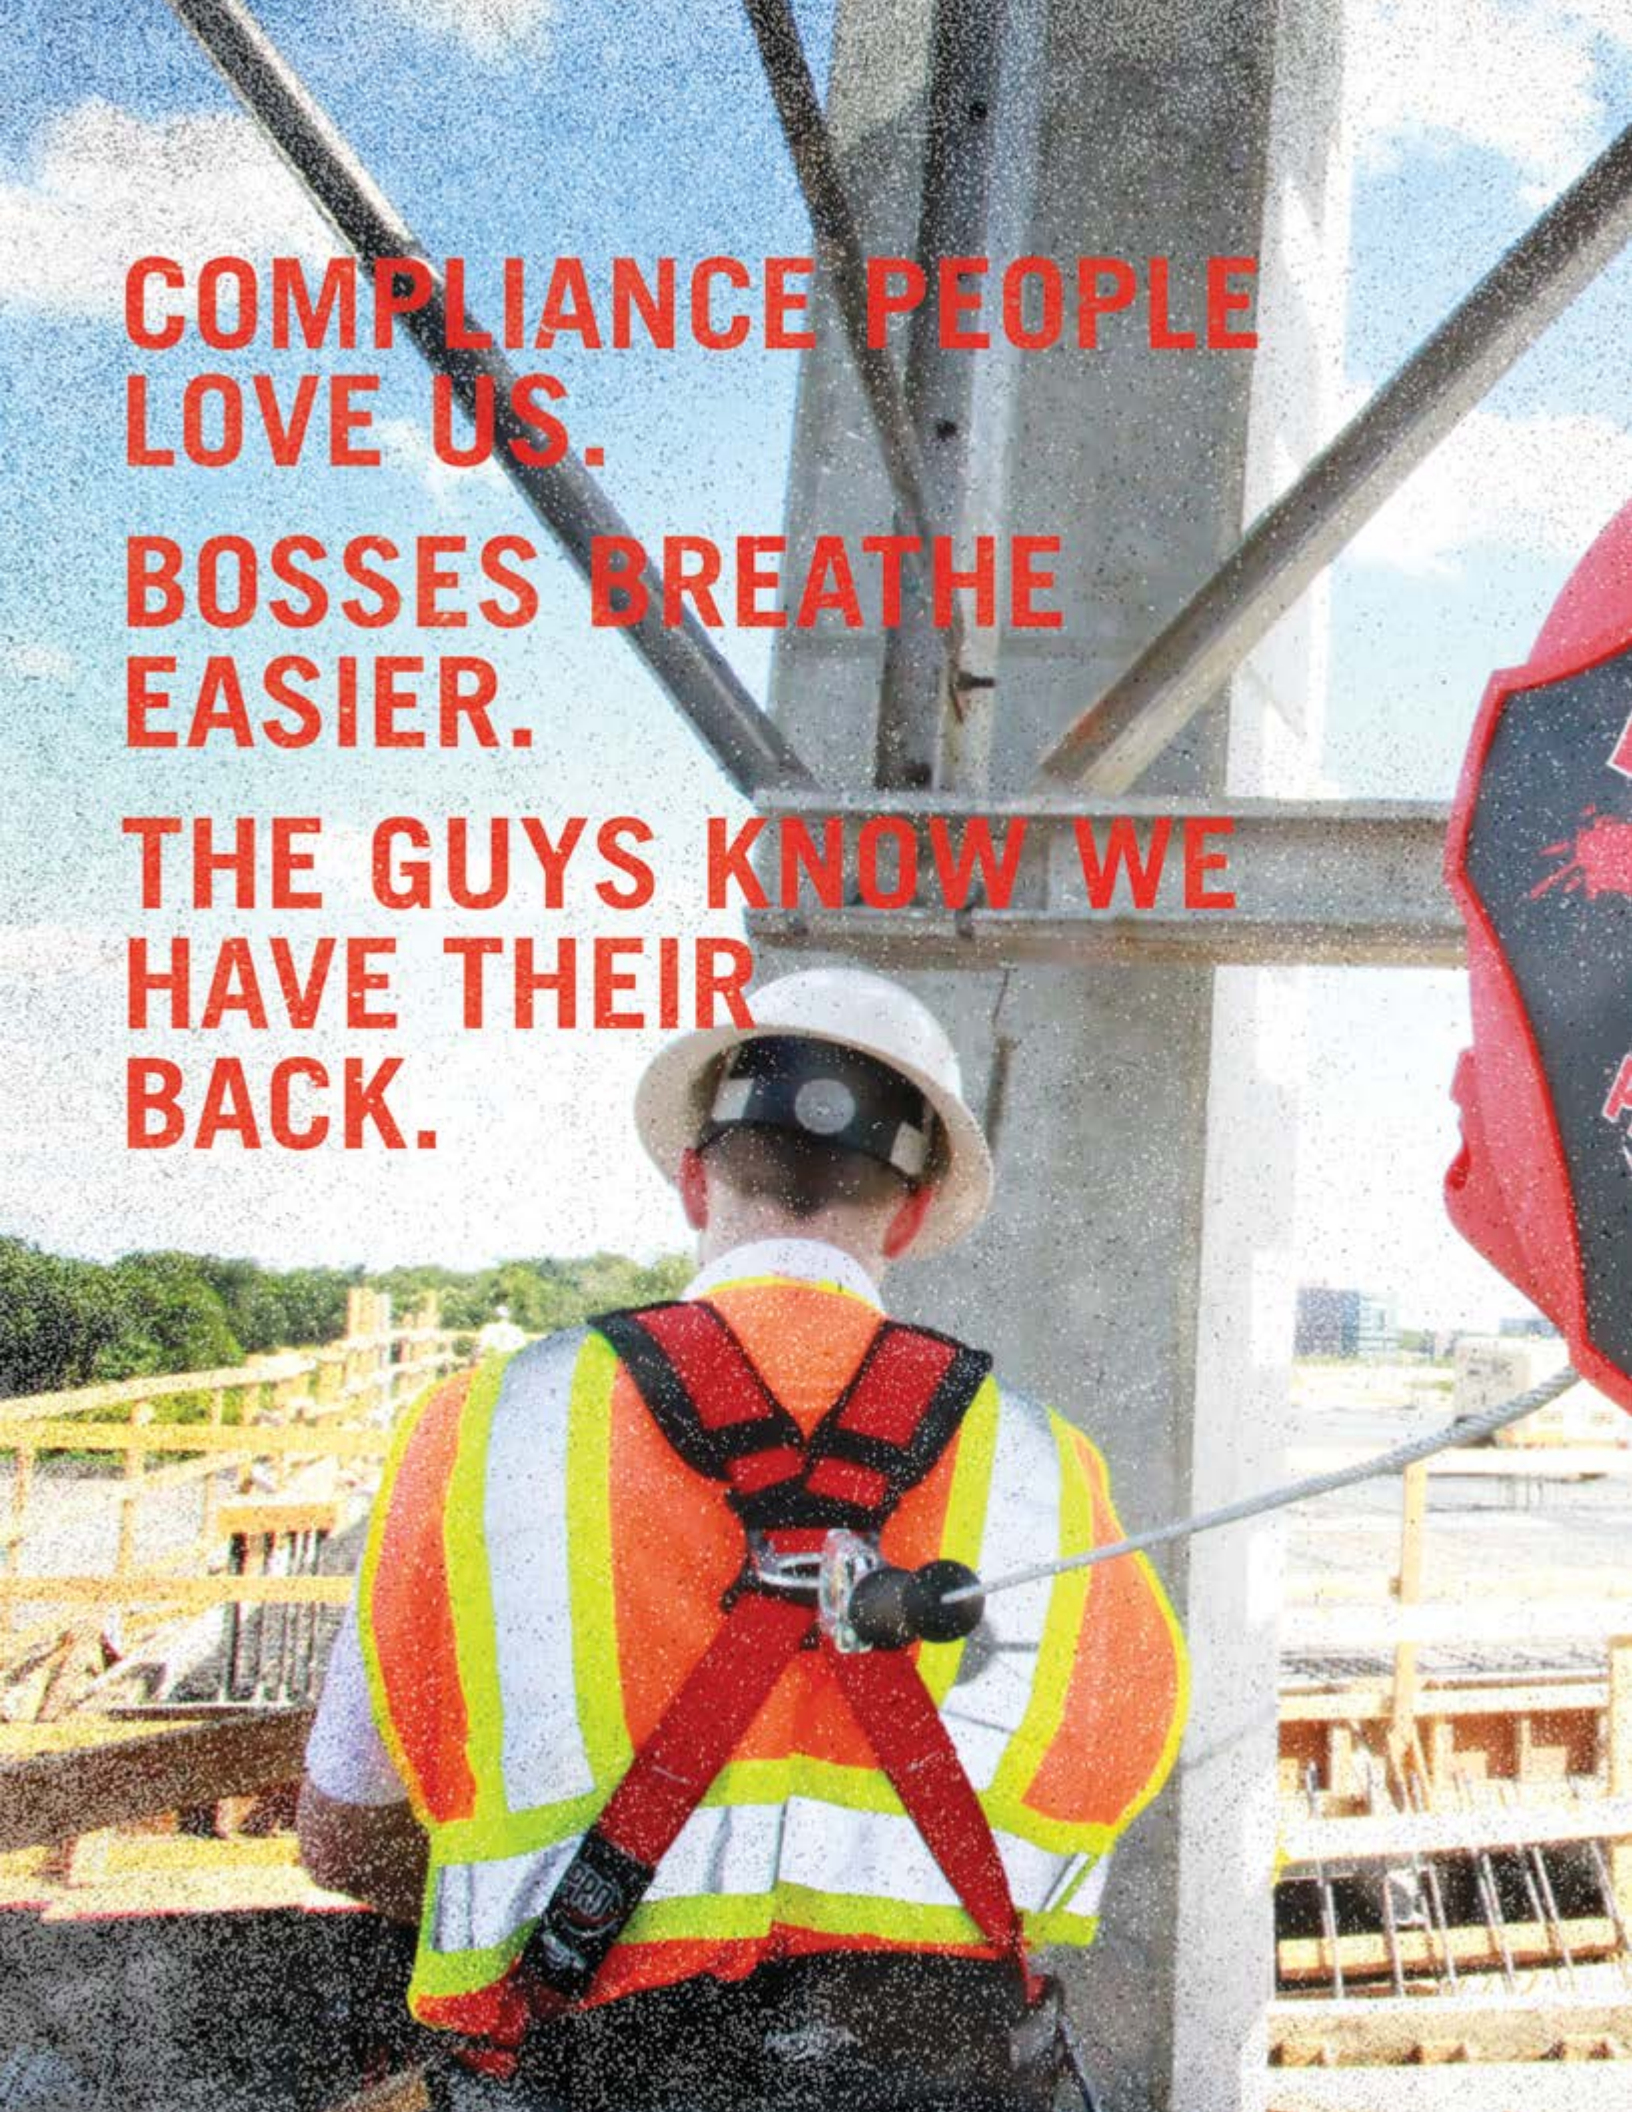



**COMPLIANCE PEOPLE AROUND
THE WORLD AGREE, WHEN IT COMES
TO FALL PROTECTION AND RESCUE,
PROTECTA® IS A GLOBAL PARTNER.**

It seems like there are fewer things you can count on every year. That's what makes Protecta stand out in fall protection and rescue. Under some of the harshest conditions around the globe, for more than 79 years, Protecta has proven its reliability job after job.

Protecta gear provides a combination of practical affordability and simple compliance. Our extensive line of safety equipment ranges from basic harnesses and lanyards to complex, industry-specific anchorage connectors with no compromise on quality. Protecta has many of the same features as higher priced equipment, such as ergonomic design, impact indicators, serial numbers, steel hardware, accessories and options for specialized needs and budgets.

Protecta gear meets or exceeds the world's most stringent standards and codes—CSA, ANSI, OSHA and CE, as well as local and provincial legislation.

TABLE OF CONTENTS

Introduction, Pgs. 4-5

Harnesses, Pgs. 6-11

Lanyards, Pgs. 12-19

Self Retracting Lifelines, Pgs. 20-23

Vertical & Horizontal Systems, Pgs. 24-27

Anchorage Connectors, Pgs. 28-31

Fall Protection Kits, Pgs. 32-35

Confined Space & Rescue, Pgs. 36-37

Protecta® is part of Capital Safety—the only company with global reach solely dedicated to fall protection and rescue—but we don't just manufacture equipment. Our leaders participate in compliance regulatory organizations. Our product specialists are on-site soliciting direct input from workers. Once you've chosen Protecta, we're there with training and long-term product support.



PROTECTA®: A SURE THING IN



LIFETIME WARRANTY

Protecta products are warranted for their entire lifetime to be free from defects in materials and workmanship, under normal use and conditions. Our warranty extends from the product's original date of purchase, in new or unused condition, from any authorized Protecta brand distributor and applies exclusively to the product's end user. For detailed warranty information, see www.capitalsafety.com.





TRAINING AND CONSULTING

Fall Protection Group now leads all Capital Safety training initiatives within Canada. Training is offered through scheduled open enrollment courses at our training facility in Calgary, Alberta or Mississauga, Ontario, as well as various other locations in Canada. We are happy to share our passion for training, please contact us by email at info@fallprogroup.com.

A WORLD OF UNCERTAINTY.

THE ABC'S OF FALL PROTECTION

The ABC's are an easy way to remember the components of fall protection. "A" stands for Anchorage, "B" is Body support and "C" is the Connection between them. Don't forget "D"—Descent and rescue equipment that must be on-site at each job.

Anchorage are a secure point of attachment. Anchorage connectors vary by industry, job, type of installation and structure. They must be able to hold fast under more than a ton of force generated in a fall.

Body Support harnesses distribute fall forces over the upper thighs, pelvis, chest and shoulders. They provide a connection point on the worker for the personal fall arrest system.

Connectors, such as shock absorbing lanyards or self retracting lifelines, connect the worker's harness to the anchorage.

Descent and Rescue devices are used to retrieve an injured worker or lower him to the ground.

HARNESSES

MODELS WITH COMFORT PADDING

Shoulders, back and legs are cushioned for increased comfort and additional security in a fall.

SPRING LOADED TORSO BUCKLES

Provide fast and easy adjustment on the job.

LIGHTWEIGHT HARDWARE

Reduces weight and fatigue. Increases comfort and productivity.

TONGUE BUCKLE LEGS

Simple, fast and easy adjustment. Ideal when more than one worker uses a harness.

Other leg strap buckles available:



Quick Connect Buckle



Pass-Thru Buckle



DORSAL D-RING

High-quality alloy steel for strength and durability. Adjustable for worker convenience.

LANYARD KEEPERS

Provides place to "park" lanyard when not in use to prevent accidental entanglements.

BUILT-IN IMPACT INDICATOR

Allows for easy inspection, added safety.

BODY BELT AND HIP PAD

Added lumbar support, positioning capabilities and tool carrying support/options.

MULTIPLE CONNECTION POINTS

Add versatility, allowing harness to be used for many different jobsite applications.

INCREASED CAPACITY

Complete protection for workers up to 420 lbs. (190 kg) – reference OSHA criteria. Capacity exceeds CSA test rating.

IMPROVED FIT

Greater sizing flexibility, comfort and overall performance.

Model Shown 1191209C

THEY COVER YOUR CREW AND YOUR REAR END AT THE SAME TIME.



Model Shown 1191260C

PRO™ SERIES The all new, fully functional Protecta® PRO™ line gives you the right harness, the right fit and the right value. With a design that incorporates an improved fit, updated colors and lightweight hardware and padding, they provide greater comfort and added safety, which means reduced worker fatigue and increased productivity. Plus, each harness now features built-in lanyard keepers and an increase in worker capacity — up to 420 lbs. (190 kg) exceeding CSA test rating. PRO™ harnesses meet CSA Z259, ANSI and OSHA standards.

PRO™ HARNESS ACCESSORIES

AK048A

EQUIPMENT BAG

Compact harness/lanyard bag,
13" x 12" (33 cm x 30 cm).



AK066A

EQUIPMENT BAG

Large bag for harness
and lanyard or 50 ft. (15 m)
lifeline, 9-1/2" x 10" x 15-1/2"
(24 cm x 25 cm x 40 cm).



PRO BODY BELT

Tongue buckle belt with hip pad
and side D-rings.

1091013 Small

1091014 Medium/Large

1091015 X-Large



1385000C

PRO D-RING EXTENSION

Dorsal D-ring extender with
D-ring at one end, snap hook at
other x 18" (45 cm).



PROTM CONSTRUCTION HARNESSES



PRO CONSTRUCTION STYLE POSITIONING HARNESS

Back D-rings, hip pad and belt with side D-rings, shoulder pads, tongue buckle legs.

1191208C Small

1191209C Medium/Large

1191210C X-Large



PRO CONSTRUCTION STYLE POSITIONING HARNESS

Back D-rings, hip pad and belt with side D-rings, shoulder pads, pass-thru leg straps.

1191226C Small

1191227C Medium/Large

1191228C X-Large



PRO CONSTRUCTION STYLE POSITIONING HARNESS WITH COMFORT PADDING

Back D-rings, hip pad and belt with side D-rings, back and leg padding, quick connect legs.

1191269C Small

1191270C Medium/Large

1191271C X-Large



PRO CONSTRUCTION STYLE POSITIONING HARNESS WITH COMFORT PADDING

Back D-rings, hip pad and belt with side D-rings, tongue buckle leg straps, moisture wicking comfort padding.

1191432C Small

1191433C Medium/Large

1191434C X-Large

PRO™ VEST-STYLE HARNESSES



PRO VEST-STYLE HARNESS

Back D-ring, tongue
buckle legs.

1191236C Small

1191237C Medium/Large

1191238C X-Large



PRO VEST-STYLE HARNESS

Back and side D-rings,
tongue buckle legs.

1191245C Small

1191246C Medium/Large

1191247C X-Large



PRO VEST-STYLE HARNESS

Back D-ring, pass-thru
buckle legs.

1191200C Small

1191201C Medium/Large

1191202C X-Large



PRO VEST-STYLE HARNESS

Back and side D-rings,
pass-thru buckle legs.

1191204C Small

1191205C Medium/Large

1191206C X-Large



PRO VEST-STYLE HARNESS WITH COMFORT PADDING

Back D-ring, shoulder,
back and leg padding,
quick connect buckle legs.

1191252C Small

1191253C Medium/Large

1191254C X-Large



PRO VEST-STYLE HARNESS WITH COMFORT PADDING

Back and side D-rings, shoulder,
back and leg padding, quick
connect buckle legs.

1191259C Small

1191260C Medium/Large

1191261C X-Large



PRO VEST-STYLE HARNESS WITH COMFORT PADDING

Back D-ring, tongue buckle leg
straps, moisture wicking comfort
padding.

1191429C Small

1191430C Medium/Large

1191431C X-Large



PRO VEST-STYLE CLIMBING HARNESS WITH COMFORT PADDING

Back and front D-rings, tongue
buckle leg straps, moisture wicking
comfort padding.

1191451C Small

1191437C Medium/Large

1191438C X-Large



PRO™ HARNESSES FOR HOT WORK



PRO VEST-STYLE HARNES FOR HOT WORK USE

Back D-ring, Kevlar® fiber webbing, pass-thru buckle legs.

1191369C Small

1191379C Medium/Large

1191380C X-Large



PRO VEST-STYLE HARNES FOR HOT WORK USE

Back and side D-rings, Kevlar® fiber webbing, pass-thru buckle legs.

1191370C Small

1191381C Medium/Large

1191382C X-Large



PRO VEST-STYLE HARNES FOR HOT WORK USE

Back D-ring, Kevlar® fiber webbing, tongue buckle legs.

1191371C Small

1191383C Medium/Large

1191384C X-Large



PRO VEST-STYLE HARNES FOR HOT WORK USE

Back and side D-rings, Kevlar® fiber webbing, tongue buckle legs.

1191372C Small

1191385C Medium/Large

1191386C X-Large

PRO™ CLIMBING HARNESSES



PRO CLIMBING HARNESS

Back and front D-rings,
tongue buckle legs.

1191272C Small

1191273C Medium/Large

1191274C X-Large



PRO CLIMBING HARNESS

Back and front D-rings,
pass-thru buckle legs.

1191233C Small

1191234C Medium/Large

1191235C X-Large

PRO RETRIEVAL HARNESSES



PRO RETRIEVAL HARNESS

Back and shoulder D-rings,
tongue buckle legs.

1191240C Small

1191241C Medium/Large

1191242C X-Large

1191243C 2X-Large



PRO RETRIEVAL HARNESS

Back and shoulder D-rings,
pass-thru buckle legs.


1191215C Small

1191216C Medium/Large

1191217C X-Large

1191218C 2 X-Large

PRO HARNESS SIZING CHART

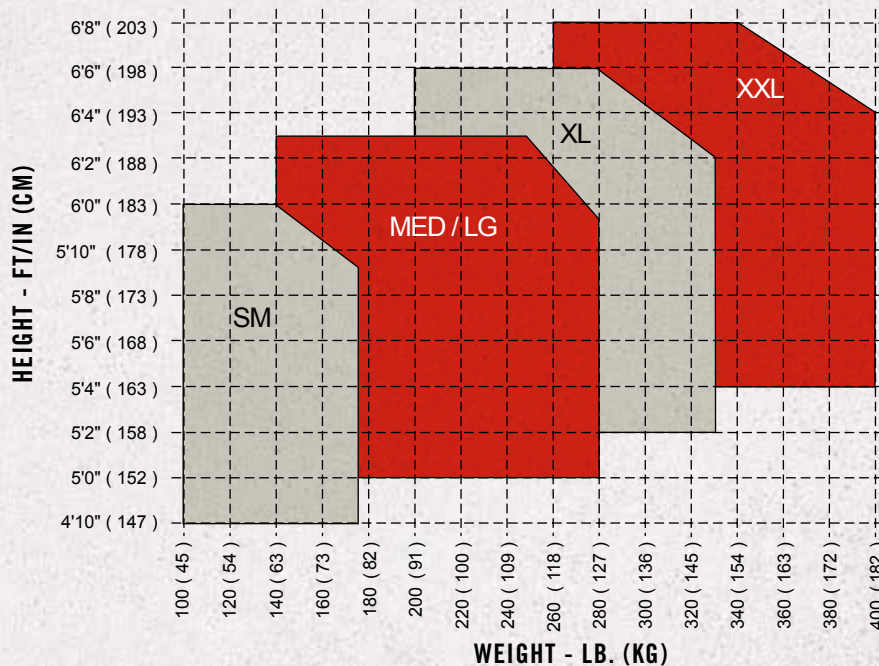

LANYARDS

HIGH STRENGTH AND CAPACITY

5,000 lb. (22 kN) breaking strength for durability and options for E4 and E6 capacities.

TOUGH WEBBING

Polyester construction is strong enough to endure rough use and the elements.

REDUCED IMPACT FORCES

Built-in energy absorber limits the average fall arresting forces to 900 lbs. (4kN) for added safety.

3,600 lb. GATED HOOKS

Every PRO™ lanyard features 3,600 lb. gated hooks, for added safety and security.

IMPACT INDICATOR

Allows for easy inspection for added safety.

DURABLE HARDWARE

Alloy steel construction with zinc plating for strength, durability and corrosion resistance.

VARIOUS STYLES AND LENGTHS

A variety of styles and lengths are available to choose from—if you don't see it, please call.

Model Shown 1341101C

HOOK OPTIONS

All Protecta® lanyards feature 3,600 lb. (16kN) gated hooks for added safety.



STANDARD HOOK
WITH 3/4" (19 mm)
GATE OPENING
3,600 lb. (16kN)
gate strength.



FLAT STEEL REBAR
HOOK WITH 2-1/4"
(57 mm) GATE OPENING
3,600 lb. (16kN)
gate strength.



TIE-BACK CARABINER
WITH A 3/4" (19 mm)
GATE OPENING
5,000 lb. (22kN)
gate strength.

FOR YOU IT'S COMPLIANCE. TO A CREW IT'S CONFIDENCE.

Protecta® PRO™ lanyards provide high quality compliance at an economical price. And trust among workers. They feature durable lanyard material construction and plated alloy steel hardware for strength and corrosion resistance. All PRO™ shock absorbing lanyards limit forces to meet CSA, ANSI and OSHA requirements.

ENERGY ABSORBER CLASSIFICATION DETAILS

CSA Class	Maximum Arresting Force	Maximum Elongation	Minimum Mass of Worker	Maximum Mass of Worker
E4	4.0 kN (900 lbs.)	1.2 m (3.9 ft.)	45 kg (100 lbs.)	115 kg (254 lbs.)
E6	6.0 kN (1300 lbs.)	1.75 m (5.7 ft.)	90 kg (200 lbs.)	175 kg (386 lbs.)

PRO E4/E6 COMBO

PRO E4/E6 Combo Lanyards are your solution for both E4 & E6 weight classes. It eliminates the need to carry two different lanyards, while giving you the confidence needed to complete the job. This lanyard leverages the features of the PRO Pack.



PRO PACK

PRO Shock Absorbing lanyards feature durable 1" (25 mm) polyester webbing, 1/2" (13 mm) nylon rope or 1/4" (6 mm) vinyl covered cable with 3,600 lb. (16kN) gated hooks and an energy absorbing design that limits the average fall arresting forces to 900 lbs. (4kN) for added safety.



PRO HOT WORKS

PRO Hot Works shock absorbing lanyards feature flame resistant Kevlar® fiber webbing and shock pack. Includes 3,600 lb. (16kN) gated hooks and an energy absorbing design that limits the average fall arresting forces to 900 lbs. (4kN) for added safety.



PRO TIE-BACK

PRO Tie-back shock absorbing lanyards feature specialized webbing and hardware that withstands the rigors of tie-back use. Includes 3,600 lb. (16kN) gated hooks and an energy absorbing design that limits the average fall arresting forces to 900 lbs. (4kN) for added safety.



PRO-STOP™

PRO-Stop lanyards feature polyester tubular web, as opposed to a traditional shock pack, 3,600 lb. (16kN) gated hooks and an energy absorbing design that limits the average fall arresting forces to 900 lbs. (4kN) for added safety.



PRO ELASTIC

PRO Elastic shock absorbing lanyards combine the pack style energy absorber with stretch capabilities. It expands to 6 ft. (1.8 m) and contracts to 4-1/2 ft. (1.4 m) in reaction to the worker's movements. The 3,600 lb. (16kN) gated hooks and an energy absorber design limit the average fall arresting forces to 1800 lbs. (8kN) for added safety.



PRO POSITIONING

All PRO Positioning lanyards feature 3,600 lb. (16kN) gated hooks and are used to maintain a working position. These devices do not incorporate shock absorbers and can only be used without a fall arrest system if the fall possibility is 2 ft. (0.6 m) or less.



PRO™ E4/E6 COMBO LANYARDS

1340133C

PRO E4/E6 COMBO LANYARD

Single-leg with snap hook and flat steel rebar hook x 6 ft. (1.8 m)

1340134C 4 ft. (1.2 m) length



1340135C

PRO 100% TIE-OFF E4/E6 COMBO LANYARD

Double-leg with snap hooks at each end x 6 ft. (1.8 m)

1340136C 4 ft. (1.2 m) length

1340137C

PRO 100% TIE-OFF E4/E6 COMBO LANYARD

Double-leg with snap hook and flat steel rebar hooks at leg ends x 6 ft. (1.8 m)

1340138C 4 ft. (1.2 m) length

PRO™ PACK SHOCK ABSORBING LANYARDS

1341001C

PRO SHOCK ABSORBING LANYARD E4

Single-leg with snap hooks at each end x 6 ft. (1.8 m)

1341004C 4 ft. (1.2 m) length

1361001C 6 ft. (1.8 m) length, E6 Class • **1361004C** 4 ft. (1.2 m) length, E6 Class



1341050C

PRO ADJUSTABLE SHOCK ABSORBING LANYARD E4

Single-leg, adjustable in length, snap hooks at each end x 6 ft. (1.8 m)

1341051C 4 ft. (1.2 m) length

1361050C 6 ft. (1.8 m) length, E6 Class • **1361051C** 4 ft. (1.2 m) length, E6 Class



1340125C

PRO SHOCK ABSORBING LANYARD E4

Single-leg with snap hook and flat steel rebar hook x 6 ft. (1.8 m)

1341006C 4 ft. (1.2 m) length

1360125C 6 ft. (1.8 m) length, E6 Class • **1361006C** 4 ft. (1.2 m) length, E6 Class



1342001C

PRO 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg with snap hooks at each end x 6 ft. (1.8 m)

1342002C 4 ft. (1.2 m) length

1362001C 6 ft. (1.8 m) length, E6 Class • **1362002C** 4 ft. (1.2 m) length, E6 Class



1342250C

PRO ADJUSTABLE 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg, adjustable length, snap hooks at each end x 6 ft. (1.8 m)

1362205C 6 ft. (1.8 m) length, E6 Class



1340180C

PRO 100% TIE-OFF SHOCK ABSORBING LANYARD E4


Double-leg with snap hook and flat steel rebar hooks at leg ends x 6 ft. (1.8 m)

1340182C 4 ft. (1.2 m) length

1360180C 6 ft. (1.8 m) length, E6 Class • **1360182C** 4 ft. (1.2 m) length, E6 Class



PRO™ PACK SHOCK ABSORBING LANYARDS (CONTINUED)

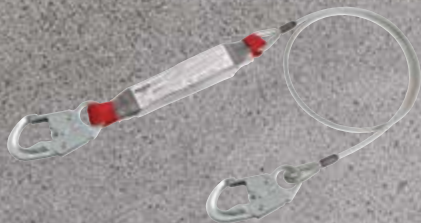

1340401C
PRO CABLE SHOCK ABSORBING LANYARD E4

Single-leg with self locking snap hooks x 6 ft. (1.8 m)


1340402C 4 ft. (1.2 m) length • **1360401C** 6 ft. (1.8 m) length, E6 Class



1340451C
PRO CABLE 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg with self locking snap hooks x 6 ft. (1.8 m)

1360451C 6 ft. (1.8 m) length, E6 Class

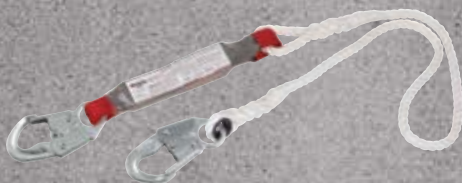

1340701C
PRO ROPE SHOCK ABSORBING LANYARD E4

Single-leg with snap hooks at each end x 6 ft. (1.8 m)



1340751C
PRO 100% TIE-OFF ROPE SHOCK ABSORBING LANYARD E4

Double-leg with snap hooks at each end x 6 ft. (1.8 m)

PRO™ LANYARDS FOR HOT WORK USE



For
Hot Work
Use



1340128C
PRO SHOCK ABSORBING LANYARD FOR HOT WORK USE E4

Single-leg with Kevlar® fiber webbing and shock pack, snap hook at one end, steel rebar hook at other end. x 6 ft. (1.8 m)



For
Hot Work
Use



1340185C
PRO 100% TIE-OFF SHOCK ABSORBING LANYARD FOR HOT WORK USE E4

Double-leg with Kevlar® fiber webbing and shock pack, flat steel rebar hooks at each end x 6 ft. (1.8 m)



For
Hot Work
Use



1340129C
PRO SHOCK ABSORBING LANYARD FOR HOT WORK USE E4

Single-leg with Kevlar® fiber webbing and shock pack, snap hooks at each end x 6 ft. (1.8 m)



For
Hot Work
Use



1340187C
PRO 100% TIE-OFF SHOCK ABSORBING LANYARD FOR HOT WORK USE E4

Double-leg with Kevlar® fiber webbing and shock pack, snap hooks at each end x 6 ft. (1.8 m)

PRO™ TIE-BACK SHOCK ABSORBING LANYARDS



1340200C

PRO TIE-BACK SHOCK ABSORBING LANYARD E4

Single-leg with floating D-ring for tie-back and snap hooks x 6 ft. (1.8 m)



1342200C

PRO TIE-BACK 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg with floating D-rings for tie-back and snap hooks x 6 ft. (1.8 m)



1340040C

PRO TIE-BACK SHOCK ABSORBING LANYARD E4

Single-leg with 5,000 lb. (22 kN) carabiner for tie-back and snap hook x 6 ft. (1.8 m)



1340060C

PRO TIE-BACK 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg with 5,000 lb. (22 kN) carabiners at leg ends for tie-back and snap hook x 6 ft. (1.8 m)

PRO-STOP™ SHOCK ABSORBING LANYARDS



1340220C

PRO-STOP SHOCK ABSORBING LANYARD E4

Single-leg with self locking snap hooks at each end x 6 ft. (1.8 m)

1340221C 4 ft. (1.2 m) length



1340250C

PRO-STOP 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg with self locking snap hook and flat steel rebar hooks at leg ends x 6 ft. (1.8 m)

1340226C 4 ft. (1.2 m) length



1340240C

PRO-STOP 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg with self locking snap hooks at each end x 6 ft. (1.8 m)

1340225C 4 ft. (1.2 m) length



1340230C

PRO-STOP SHOCK ABSORBING LANYARD E4

Single-leg with self locking snap hook and flat steel rebar hook x 6 ft. (1.8 m)

1340223C 4 ft. (1.2 m) length

Every PRO™ lanyard features 3,600 lb. (16kN) gated hooks for added safety and security on the jobsite. The hooks also incorporate high strength, corrosion resistant materials for added durability and longevity.

PRO™ ELASTIC SHOCK ABSORBING LANYARDS



1341101C
PRO ELASTIC SHOCK ABSORBING LANYARD E4

Single-leg with snap hooks at each end x 6 ft. (1.8 m)

1341102C 4 ft. (1.2 m) length • **1361101C** 6 ft. (1.8 m) length, E6 Class



1342101C
PRO ELASTIC 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg with snap hooks at each end x 6 ft. (1.8 m)

1362101C 6 ft. (1.8 m) length, E6 Class

1342125C
PRO ELASTIC 100% TIE-OFF SHOCK ABSORBING LANYARD E4

Double-leg with snap hook and flat steel rebar hooks at leg ends x 6 ft. (1.8 m)

1342102C 4 ft. (1.2 m) length • **1362125C** 6 ft. (1.8 m) length, E6 Class



ACCESSORIES



1340260C
PRO SHOCK ABSORBER

Shock absorber (ONLY) with D-ring at one end, snap hook at other x 18-1/2" (47 cm)

Add in-line to a non-shock absorbing lanyard for fall arrest applications

1360260C E6 classified shock absorber



1385000C
PRO D-RING EXTENSION

Dorsal D-ring extender with D-ring at one end, snap hook at other x 18" (45 cm)



PRO™ POSITIONING LANYARDS



1385101C
PRO WEB POSITIONING LANYARD

Single-leg with snap hooks at each end x 6 ft. (1.8 m)



1385301C
PRO ADJUSTABLE WEB POSITIONING LANYARD

Single-leg, adjustable length with snap hooks at each end x 6 ft. (1.8 m)



1385501C
PRO ROPE POSITIONING LANYARD

Single-leg with snap hooks at each end x 6 ft. (1.8 m)



1351001C
PRO WEB REBAR ASSEMBLY

Swiveling web rebar assembly with snap hooks and flat steel rebar hook at center x 24" (61 cm)



1351050C
PRO WEB REBAR ASSEMBLY


Web rebar assembly with snap hooks and flat steel rebar hook at enter x 22" (56 cm)

SELF RETRACTING LIFELINES



STILL USING A LANYARD? UPGRADE TO THE REBEL™ 6 FT. SRL.

Example of Fall Clearance Requirements of the Rebel 6 ft. SRL vs. Similar Lanyard Length.

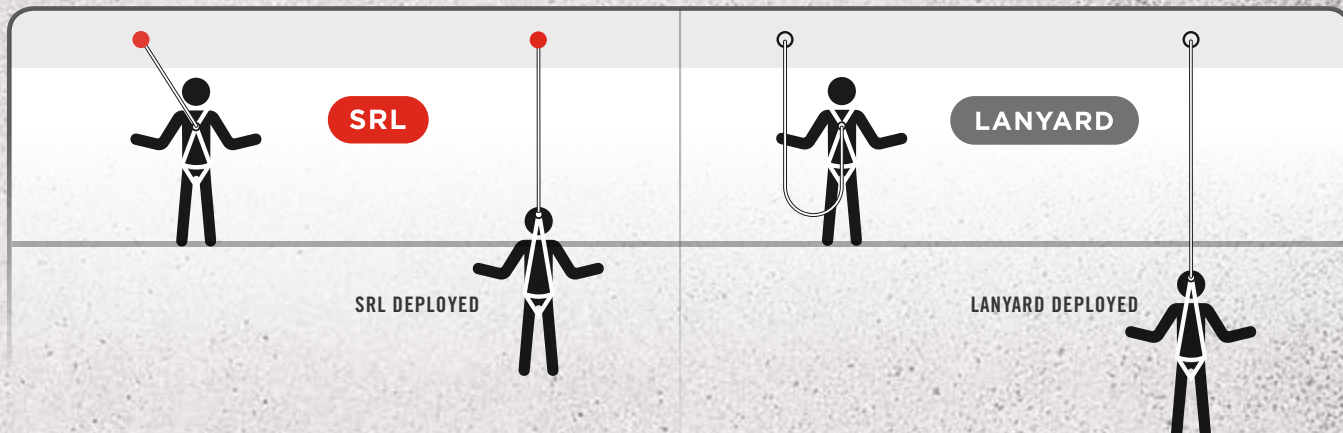

*Always refer to instructions for fall clearance

**310 lb. (141 kg)
CAPACITY**
Meets a wide range of
user weights.

**TRIPLE ACTION
CARABINER**
For easy connection
to anchorage point
or harness.

IMPACT RESISTANT
Thermoplastic housing –
lightweight, compact
and durable.

HEAT-SHRUNK
Clear PVC coating
over EVA foam label
on shock pack for
improved durability.

HIGH STRENGTH
Thin webbing for added
durability and longevity.

Model Shown 3100409

COMPLIANT
Fully CSA, OSHA
and ANSI compliant.

SPECIFICATIONS

Single



100%
Tie-off



3100409

Steel Snap Hook with Carabiner

3100415

Steel Snap Hook with Carabiner

3100410

Steel Swiveling Snap Hook with Carabiner

3100416

Steel Swiveling Snap Hook with Carabiner

3100411

Steel Rebar Hook with Carabiner

3100417

Steel Rebar Hook with Carabiner

ECONOMICAL. DEPENDABLE. SAFE.

With a Rebel™ Self Retracting Lifeline (SRL), you get an economical fall protection solution that won't compromise the safety or performance of your crew. Rebel continues to set performance standards beyond compliance, while providing a substantial value compared to competitive models.

IMPROVED SHOCK PACK DESIGN (6' - 20' UNITS)

RUGGED, LIGHTWEIGHT HOUSING

RECESSED LABELS TO INCREASE PRODUCT LIFE

IMPACT INDICATOR

SWIVELING ANCHORAGE

3,600 LB. GATE CAPACITY - ALL HOOKS & CARABINERS

420 LB. MODELS AVAILABLE (33' UNITS AND ABOVE)

3590022

REBEL 15 Ft. (4.5 m) SRL

15 ft. (4.5 m) of 3/16" (5 mm) galvanized steel wire rope with steel swiveling snap hook, swiveling anchorage and carabiner.



3100428

REBEL 10 Ft. (3 m) SRL

10 ft. (3 m) of 1" (2.5 cm) polyester web with steel snap hook, swiveling anchorage and carabiner.



3100429

REBEL 10 Ft. (3 m) SRL

10 ft. (3 m) of 1" (2.5 cm) polyester web with steel swiveling snap hook, swiveling anchorage and carabiner.



3100430

REBEL 10 Ft. (3 m) SRL

10 ft. (3 m) of 1" (2.5 cm) polyester web with steel rebar hook, swiveling anchorage and carabiner.












3100435

REBEL 20 Ft. (6.1 m) SRL

20 ft. (6.1 m) of 1" (2.5 cm) polyester web with steel swiveling snap hook, swiveling anchorage and carabiner.

DOZENS OF WAYS TO STAY COMPLIANT WITHOUT COMPROMISE.

Web/Cable Length												6' (1.8 m)	10' (3.0 m)	15' (4.5 m)	20' (6 m)	33' (10 m)	50' (15 m)	66' (20 m)	85' (26 m)	100' (30 m)	
Lifeline Material	Thermoplastic Housing	Aluminum Housing	Stackable	Impact Indicator	Swiveling Anchorage	Self Locking Snap Hook	Rebar Hook	Swiveling Hook	Leading Edge	100% Tie-Off	310 lb. (140 kg) Weight Capacity	420 lb. (190 kg) Weight Capacity									
Galv Cable	•				•	•		•			•			3590017	3590022						
	•				•	•					•				3590021						
	•		•	•	•	•		•				•				3590518	3590502	3590552	3590592	3590632	3590672
		•	•	•	•	•		•				•				3590524	3590512	3590562	3590602	3590642	3590682
	•		•	•	•	•		•	•		•					3590541					
	•				•	•	•				•				3590023						
SS Cable	•		•	•	•	•		•				•				3590519	3590503	3590553	3590593	3590633	3590673
		•	•	•	•	•		•				•				3590529	3590513	3590563	3590603	3590643	3590683
Web	•				•	•					•		3100409	3100428		3100434					
	•				•	•		•			•		3100410	3100429		3100435					
	•				•	•	•				•		3100411	3100430		3100436					
	•				•	•				•	•		3100415								
	•				•	•		•		•	•		3100416								
	•				•	•	•			•	•		3100417								



See Pages 36-37 Confined Space & Rescue Section for Rebel™ 3-Way SRL's with Built-In Emergency Retrieval



HINT: NEVER CHOOSE AN INFERIOR LIFELINE FOR A BIG GUY WITH A HAMMER.



Model 1200101

Protecta® offers reliable vertical and horizontal lifeline systems that not only ensure a worker's safety, but complement his ability to work. PRO™, Cobra™ and Cabloc™ are established performers in many industries and meet applicable standards.



HORIZONTAL LIFELINE SYSTEM

1200101

PRO-LINE™ SYNTHETIC HORIZONTAL LIFELINE SYSTEM

The PRO-Line synthetic horizontal lifeline systems are lightweight, easy to install and extremely portable. Just disassemble and take to the next job.

- Complete kit includes two tie-off adaptors for simple anchorage to structure
- Built-in shock absorber reduces anchorage loadings to preserve the structure
- Fall arrest rated for two users provides jobsite flexibility
- 60 ft. (18 m) web lifeline is compact, portable and versatile

1200105 PRO-Line Synthetic Horizontal Lifeline System x 60 ft. (18 m) with carrying bag (no tie-off adaptors)



LADDER SAFETY SLEEVE

AC351C

CABLOC™ LADDER SAFETY SLEEVE

The Cabloc device is for use on fixed ladder safety systems. It offers complete hands-free operation, and arrests a fall within 2 ft. (0.6 m). It travels on a 3/8" (9.5mm) 7x19 solid core cable affixed to a ladder or pole, utilizing an upper and lower bracket.

AC350C Cabloc Ladder Safety Sleeve for use on 5/16" (8 mm) 7x19 solid core cable



ROPE GRABS – AUTO AND MANUAL

AC202C

COBRA™ ROPE GRAB (Auto/Manual)

- Mobile design automatically follows user for hands-free operation
- Manual option allows user to fix unit in place for positioning or restraint
- Detachable design can be attached or removed anywhere along lifeline
- For use on 5/8" (16 mm) polyester/polypropylene rope lifeline
- CSA class ADP



5000003

ROPE GRAB (Auto)

- Mobile design automatically follows user for hands-free operation
- Detachable design can be attached or removed anywhere along lifeline
- For use on 5/8" (16 mm) polyester/polypropylene rope lifeline
- Lightweight and compact design



1340005

PRO ROPE ADJUSTER/LANYARD (Manual)

- Manual design allows user to fix unit in place for positioning or restraint
- Attached 2 ft. (0.6 m) shock absorbing lanyard
- For use on 5/8" (16 mm) polyester/polypropylene rope lifeline



LIFELINES

AC215A

LIFELINE - NYLON

50 ft. (15 m) nylon rope lifeline with attached snap hook.

- | | |
|----------------|---|
| AC210A1 | 25 ft. (7.6m), 5/8" (16 mm) nylon, carabiner at one end, taped at other |
| AC210A2 | 25 ft. (7.6m), 5/8" (16 mm) nylon, snap hooks at both ends |
| AC215A1 | 50 ft. (15m), 5/8" (16 mm) nylon, carabiner at one end, taped at other |
| AC215A2 | 50 ft. (15m), 5/8" (16 mm) nylon, snap hooks at both ends |
| AC225A1 | 75 ft. (22m), 5/8" (16 mm) nylon, carabiner at one end, taped at other |
| AC230A1 | 100 ft. (30m), 5/8" (16 mm) nylon, carabiner at one end, taped at other |

1299997

LIFELINE - POLYESTER/POLYPROPYLENE

50 ft. (15m) polyester/polypropylene blended rope lifeline with attached snap hook.

- | | |
|----------------|--|
| 1299996 | 25 ft. (7.6 m), 5/8" (16 mm) blended polyester/polypropylene, snap hook at one end, taped at other |
| 1299991 | 30 ft. (9 m), 5/8" (16 mm) blended polyester/polypropylene, snap hook at one end, taped at other |
| 1299992 | 75 ft. (22 m), 5/8" (16 mm) blended polyester/polypropylene, snap hook at one end, taped at other |
| 1299998 | 100 ft. (30 m), 5/8" (16 mm) blended polyester/polypropylene, snap hook at one end, taped at other |



ANCHORAGE CONNECTORS



ANCHORS MADE FOR CONCRETE, WOOD, STEEL AND PEACE-OF-MIND.

Anchorage connectors are dependent on specific job requirements—the type of attachment, environment and connecting system. That's why we offer the most complete line, all rigorously tested to meet applicable CSA, OSHA and ANSI standards and ensure strength. Our anchorages are a secure point of attachment capable of supporting a load of 5,000 lbs. (22kN) per worker. An anchorage connector attaches your personal fall arrest system to the main anchorage or support structure.

GENERAL (ALL-PURPOSE) ANCHORS

Portable anchors used in a variety of applications. Many are "choker" style designed to provide a safe and easy way to anchor a fall protection device to an overhead location beyond normal reach.



STEEL ANCHORS

Anchors for steel are often used during commercial construction and attached to steel columns and beams. Models can be permanently attached or temporarily clamped, offering a fixed or mobile anchorage connector.



CONCRETE ANCHORS

Concrete anchors are secured to concrete decks and columns. They provide the worker with safety and mobility when performing concrete construction work.



ROOF ANCHORS

Roof anchors are available in a variety of designs to meet the specific requirements of your roof type. They are designed to keep the worker safe, without causing damage to the structure.



GENERAL (ALL-PURPOSE) ANCHORAGE CONNECTORS

Our tie-off adaptors are our most versatile anchorage connector combining ease of use, light weight and 5,000 lb. (22kN) high strength.



AJ450C-6 WEB TIE-OFF ADAPTOR

Pass-thru design makes attaching to anchorage quick and easy. 1-3/4" polyester strength member with 3" wide polyester wear pad x 6 ft. (1.8 m).

AJ450C-3 Web tie-off adaptor x 3 ft. (0.9 m)

AJ47410C-6 Web tie-off adaptor x 6 ft. (1.8 m) with web loop and D-ring pass-thru

AJ47410C-3 Web tie-off adaptor x 3 ft. (0.9 m) with web loop and D-ring pass-thru

AJ408CG-6 CABLE TIE-OFF ADAPTOR

Lightweight and extremely durable 1/4" (6.4 mm) coated galvanized cable stands up to harsh environments. 6 ft. (1.8 m) length with snap hook at one end, O-ring at the other.

AJ47406-6 Cable tie-off adaptor with two O-rings

2190102C CABLE TIE-OFF ADAPTOR

1/4" galvanized 7x19, with carabiner at one end and two D-rings at other x 6 ft.

2190100C Cable tie-off adaptor with carabiner at one end and two D-rings at the other x 3 ft.

2190101C Cable tie-off adaptor with carabiner at one end and two D-rings at the other x 4 ft.



Carabiners are an extremely versatile choice to keep your system securely connected. Workers appreciate the reduced weight and easy operation they offer. 5,000 lb. (22kN) minimum breaking strength for added safety.



2000112 CARABINER

Steel carabiner with 3,600 lb. (16kN) self closing/locking gate, 11/16" (17.5 mm) opening.

2000117 Carabiner, roll pin, 11/16" (1.75 cm) opening

2000114 Carabiner 2-3/16" (5.56 cm) opening

STEEL ANCHORAGE CONNECTORS

Extremely versatile anchors for steel are lightweight and compact, providing an easy to install and safe 5,000 lb. (22 kN) tie-off point for your personal fall protection system.



AJ704A BEAMDOG™ SLIDING BEAM ANCHOR

For use on top or below an I-beam with flanges 4" to 14-3/4" (10 cm - 37.4 cm) wide and up to 1-1/2" (3.8 cm) thick. Nylon rollers provide smooth, effortless operation along the beam.

AJ703A RAILDOG™ SLIDING RAIL ANCHOR

Provides mobile anchor point on 2-3/4" to 3-1/4" (7 cm - 8.25 cm) wide rails. Incorporates stainless steel construction and special 5,000 lb. (22kN) gate rated carabiner.



AN3732A-12 EYEBOLT ANCHOR - UNTHREADED

Unthreaded ring only (no bolt), forged steel construction with zinc plating, 1/2" (1.27 cm) hole.

AN3732A-58 Eyebolt anchor with 5/8" (1.58 cm) hole

AN3732A-34 Eyebolt anchor with 3/4" (1.9 cm) hole

AN112C EYEBOLT ANCHOR - THREADED

Forged steel construction with zinc plating, 1/2" x 1-3/8" mounting bolt, 2-3/4" ID horizontal anchor area, 1-3/8" ID vertical anchor area.



AJ301A HAND GRIP

2" (5 cm) capacity. One hand operation with plastic grips for comfort.

AJ302A Hand Grip with 3" (7.6 cm) capacity

AJ303A Hand Grip with 4" (10 cm) capacity



CONCRETE ANCHORAGE CONNECTORS

Our concrete anchors are lightweight and compact, providing an easy to install and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.



2190053 REUSABLE CONCRETE WEDGE ANCHOR

Portable, durable and safe concrete anchor for vertical wall or overhead ceiling applications. Easy to use for added safety and flexibility.

2190055 CONCRETE D-RING ANCHOR

Simple, versatile and safe concrete anchor for temporary or permanent applications. Extremely rugged design for extended life and jobsite flexibility.

2190060 Concrete D-ring anchor with 6 bolts



2190057 CONCRETE ANCHOR STRAP

Pack of 25 disposable anchor straps with D-ring x 3-1/2 ft. (1 m) is designed to provide a temporary anchorage on concrete forms. Loop slips over rebar, then concrete is poured over. When no longer needed, simply cut strap and discard.

2190058 Concrete Anchor Strap with D-Ring x 4 ft. (1.2 m) - Pack of 25

2190063 Concrete Anchor Strap without D-Ring x 3-1/2 ft. (1 m) - Pack of 25



AJ720A CONCRETE ANCHOR PLATE

Mounts horizontally or vertically to concrete or steel and includes forged D-ring for tie-off point.

AN220A CONTINUOUS CONCRETE INSERT ANCHOR

Provides mobile anchor in standard strut material. Stainless steel plates with steel carabiner. Accommodates 1-5/8" (4.1 cm) wide strut material.



ROOF ANCHORS

We offer a complete array of anchorage devices for sloped wood and flat commercial steel roofs to help you customize the perfect fall protection solution.

AJ730A PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with 20 ea. 16D nails. Simple hinge style design is extremely easy to transport, install, dismantle and store.

2103680 KNOCK DOWN DISPOSABLE ROOF ANCHOR KIT

Simply nail into sheathing and roof member. When job is complete, knock down or shingle over. Kit contains 12 anchors and nails.

2103678C PERMANENT RIDGE ROOF ANCHOR

Installs with nails at the roof ridge. Shingle over leaving only the D-ring exposed. Provides fall protection during initial construction as well as for future homeowner.



AJ730A



2103680



2103678C

2190001C STANDING SEAM SWIVELING ROOF ANCHOR

Portable and reusable anchor fits seam spacing of 12" to 24" (30 cm-61 cm). Non-penetrating clamp design won't damage the roof. Universal self retracting lifeline (SRL) cradle fits most SRLs and swivels 360° for maximum mobility and protection. (Shown with Rebel™ SRL—must order separately).




2190013 METAL/WOOD SWIVELING ROOF ANCHOR

Portable and reusable anchor provides 360° of mobility and protection on sloped or flat wood and metal decking. Universal bracket accommodates most self retracting lifelines. (Shown with Rebel™ SRL—must order separately.)



FALL PROTECTION KITS

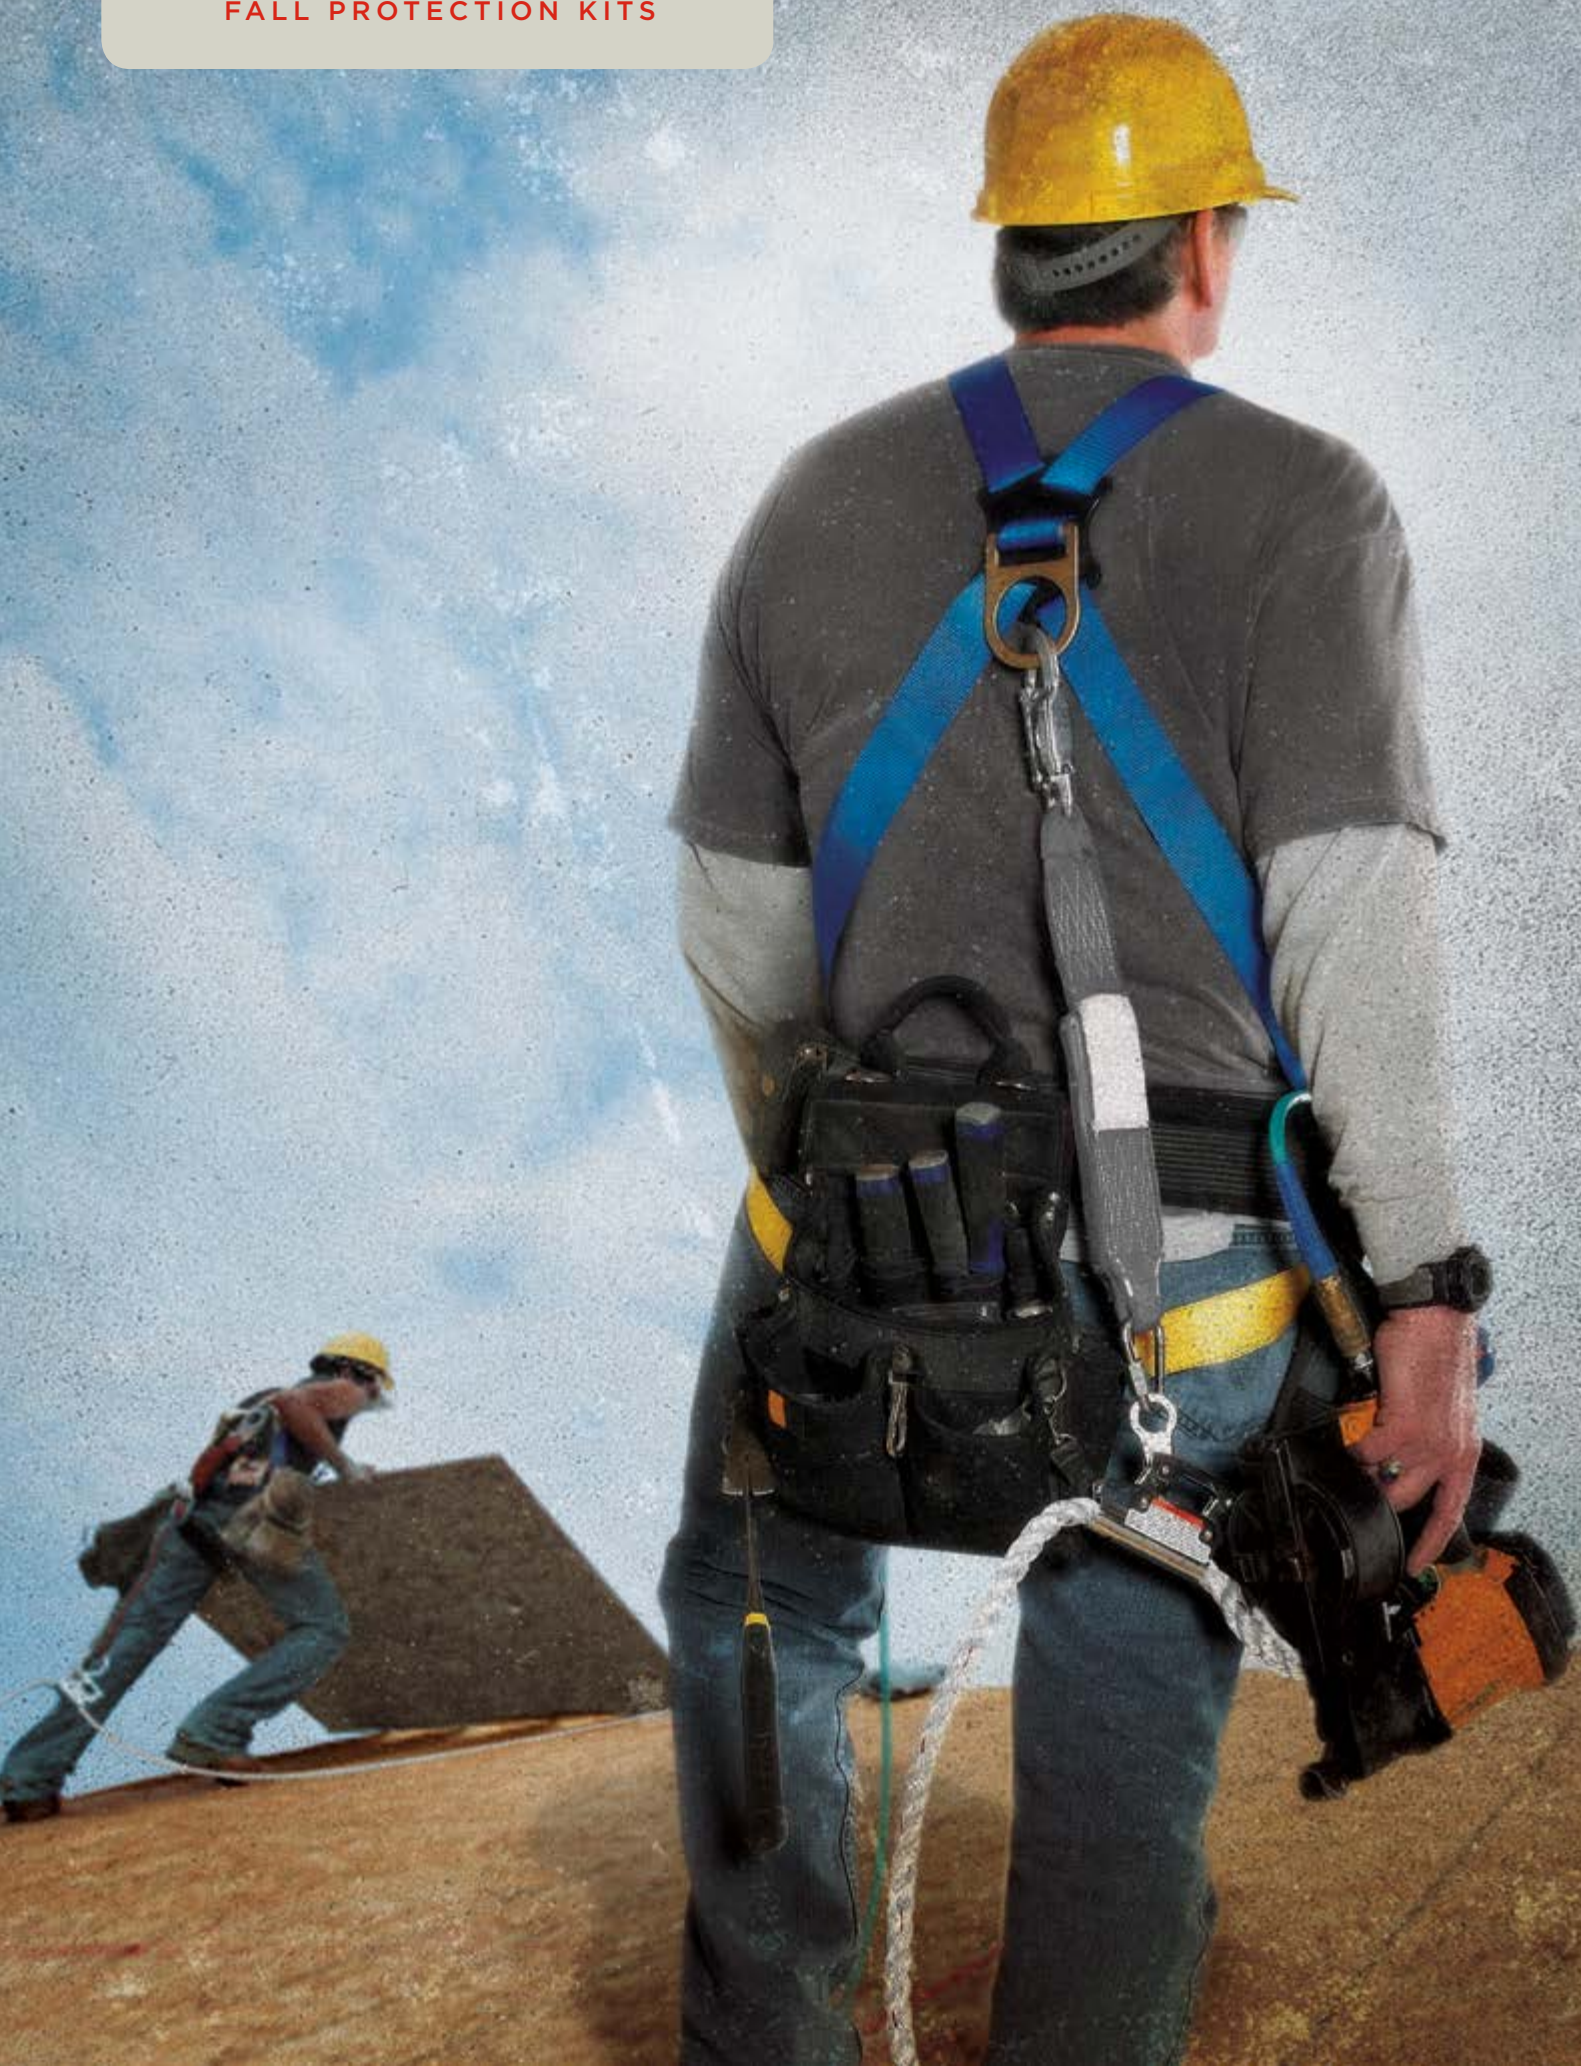

IT'S THIS SIMPLE: IT'S ALL IN THE CAN.

COMPLIANCE IN A CAN™

A complete fall protection system in one handy container!

Often imitated, never matched. Protecta® pioneered the creation of a complete fall protection system available in a convenient container. The success of the original “can” spawned the creation of several variations with different anchorage devices. Each kit offers a complete set-up for convenient CSA and OSHA compliance and safety on the job.



WHAT'S ALL IN THE CAN

See chart on next page for available combinations



AB17530C
Pass-thru
buckle legs



1191201C
Pass-thru
buckle legs

5-POINT HARNESS FOR VERSATILITY

5-point harnesses meet a wide variety of jobsite requirements.



AJ730A

ROOF ANCHOR

Lightweight and compact reusable roof anchor provides anchorage and tie-off point.



AC203C-SA2



1204001C

PRO™ ROPE ADJUSTER WITH SHOCK ABSORBING LANYARD AND ROPE LIFELINE

Compact, lightweight manual adjuster with 2 ft. (0.6 m) shock absorbing lanyard (AC203C-SA2) stays locked in place on the 50 ft. or 25 ft. (15 m or 7.6 m) 5/8" polyester/polypropylene lifeline (1204001 or 1203118).

PRO™ SHOCK ABSORBING LANYARDS

6 ft. and 4 ft. (1.8 m and 1.2 m) shock absorbing lanyards limit the average fall arresting forces to 900 lbs. (4 kN) for added safety.



1341001C 6 ft. (1.8 m)
1341004C 4 ft. (1.2 m)

1341001C 6 ft. (1.8 m)
1341004C 4 ft. (1.2 m)

COMPLIANCE IN A CAN™ ROOFERS KIT

KIT COMPONENTS

CIAC SKU	Harnesses		Connector AC203C-SA2	Anchor AJ730A	Lifelines	
	1191201C	AB17530C			1204001C	1203118
2199825	●		●	●	●	
2199827	●		●	●		●
2199826*		●	●	●	●	

*In a cardboard box, not a bucket.



COMPLIANCE IN A CAN™ LIGHT

KIT COMPONENTS

CIAC SKU	Harnesses		Connectors			
	1191201C	AB17530C	1341001C	1341004C	1340125C	1341006C
2199820	●		●			
2199824*		●	●			
2199821	●			●		
2199822	●				●	
2199823	●					●

*In a cardboard box, not a bucket.



LEG LOCKS

Built into head to ensure legs stay locked in place.

BUILT-IN ANCHOR POINTS

Four eyebolts offer secondary anchor points for a fall arrest system.

PULLEY

Routes winch/SRL lifeline over opening providing smooth operation.

MECHANICAL DEVICES

Can support winches or SRLs for complete flexibility.

ADJUSTABLE LOCKING LEGS

Fast and easy detent pin style adjustment allows for precise height setting.

TELESCOPING LEGS

Provide fast and easy adjustment.

FOOT PADS

Skid resistant treadplate soles on feet.

SAFETY CHAIN

Provides added support and strength for demanding confined space applications.

ALUMINUM CONSTRUCTION

Extremely lightweight yet durable construction for ease of use and longevity.



WHEN EVERY SECOND COUNTS, THERE IS NO SECOND BEST.

Lightweight, portable Protecta® aluminum tripods are ideal for confined space manhole entry and retrieval. They're easily transported from one location to another and can be set-up by one worker. Attach one or two mechanical devices and you're ready to go. Built to meet CSA, OSHA and ANSI standards.

CONFINED SPACE COMPONENTS

AK105A CONFINED SPACE TRIPOD

- 8 ft. (2.4 m) height
- 5,000 lb. (22 kN) 1-man rated
- Fast and simple installation
- Anodized epoxy coated aluminum



AK020A1 PULLEY WITH CARABINER

- Routes winch/SRL lifeline
- Anodized aluminum construction
- Pivoting sheave pulley guide
- Includes carabiner



AK020A pulley without carabiner

3591008 REBEL™ 3-WAY SELF RETRACTING LIFELINE

- 50 ft. (15 m) galvanized cable
- 310 lb. (140 kg) man rated capacity
- Fast and simple installation
- Fall arrest device with built-in emergency retrieval winch
- Models available with mounting brackets (or separately)



	50'	50' With Bracket
SS	3591009	3591011
Galv	3591008	3591010

3590498 Rebel 3-Way SRL Brackets, 3590497 SRL side bracket and 8008005 tripod side bracket

AK205CG CONFINED SPACE WINCH

- 50 ft. (15 m) galvanized cable
- 310 lb. (140 kg) man rated capacity
- Fast and simple installation
- 4:1 ratio at 20 fpm



AK205CT Winch with 50 ft. (15 m) fiber rope lifeline

	30'	50'	60'	75'	110'
SS	AK203CS	AK205CS	AK206CS	AK207CS	AK210CS
Galv	AK203CG	AK205CG	AK206CG	AK207CG	AK210CG

CONFINED SPACE SYSTEMS

- 8308009 AK105A tripod, 3591008 Rebel™ SRL 50 ft. (15 m) 3-Way with galvanized cable, 3590498 bracket set, AK020A1 pulley and carabiner, AK067A carrying bag
- 8308010 AK105A tripod, 3591009 Rebel™ SRL 50 ft. (15 m) 3-Way with stainless steel cable, 3590498 bracket set, AK020A1 pulley and carabiner, AK067A carrying bag
- 8308051 AK105A tripod, AK205CG winch, 3590552 Rebel™ 50 ft. (15 m) galvanized SRL, 1191201C harness
- 8308052 AK105A tripod, AK205CG winch, 3590552 Rebel™ 50 ft. (15 m) galvanized SRL (no harness)
- 8308053 AK105A tripod, AK205CG winch, 3590552 Rebel™ 50 ft. (15 m) galvanized SRL, AK067A tripod bag, 1191201C harness

PART NUMBER & PAGE INDEX

1091013.....	7	1191431C	9	1342200C	16	3100436.....	23	AJ450C-3.....	30
1091014.....	7	1191432C	8	1342250C	14	3590017.....	23	AJ450C-6.....	30
1091015.....	7	1191433C	8	1351001C	19	3590021.....	23	AJ47406-6.....	30
1191200C	9	1191434C	8	1351050C	19	3590022.....	22, 23	AJ47410C-3.....	30
1191201C ..9, 34, 35		1191437C	9	1360125C	14	3590023.....	23	AJ47410C-6.....	30
1191201C (cont) ..	37	1191438C	9	1360180C	14	3590497.....	37	AJ703A	30
1191202C	9	1191451C	9	1360182C	14	3590498.....	37	AJ704A	30
1191204C	9	1200101.....	25, 26	1360401C	15	3590502.....	23	AJ720A	31
1191205C	9	1200105.....	26	1360451C	15	3590503.....	23	AJ730A	31, 34, 35
1191206C	9	1203118.....	34, 35	1361001C	14	3590512.....	23	AK020A.....	37
1191208C	8	1204001C	34, 35	1361004C	14	3590513.....	23	AK048A.....	7
1191209C	6, 8	1299991.....	27	1361006C	14	3590518.....	23	AK066A.....	7
1191210C	8	1299992.....	27	1361050C	14	3590519.....	23	AK105A.....	37
1191215C	11	1299996.....	27	1361051C	14	3590524.....	23	AK203CG.....	37
1191216C	11	1299997.....	27	1362001C	14	3590529.....	23	AK203CS	37
1191217C	11	1299998.....	27	1362002C	14	3590541.....	23	AK205CG.....	37
1191218C	11	1340005.....	27	1362101C	17	3590552.....	23	AK205CS	37
1191226C	8	1340040C	16	1362102C	17	3590553.....	23	AK206CG	37
1191227C	8	1340060C	16	1362125C	17	3590562.....	23	AK206CS	37
1191228C	8	1340125C 14, 34, 35		1362250C	14	3590563.....	23	AK207CG	37
1191233C	11	1340128C	15	1385000C 7, 17		3590592.....	23	AK207CS	37
1191234C	11	1340129C	15	1385101C	19	3590593.....	23	AK210CG	37
1191235C	11	1340133C	14	1385301C	19	3590602.....	23	AK210CS	37
1191236C	9	1340134C	14	1385501C	19	3590603.....	23	AK020A1	37
1191237C	9	1340135C	14	2000112.....	30	3590632.....	23	AN112C	30
1191238C	9	1340136C	14	2000114.....	30	3590633.....	23	AN220A	31
1191240C	11	1340137C	14	2000117.....	30	3590642.....	23	AN3732A-12.....	30
1191241C	11	1340138C	14	2103678C	31	3590643.....	23	AN3732A-34.....	30
1191242C	11	1340180C	14	2103680.....	31	3590672.....	23	AN3732A-58.....	30
1191243C	11	1340182C	14	2190001C	31	3590673.....	23		
1191245C	9	1340185C	15	2190013.....	31	3590682.....	23		
1191246C	9	1340187C	15	2190053.....	31	3590683.....	23		
1191247C	9	1340200C	16	2190055.....	31	3591008.....	37		
1191252C	9	1340220C	16	2190057.....	31	3591009.....	37		
1191253C	9	1340221C	16	2190058.....	31	3591010.....	37		
1191254C	9	1340223C	16	2190060.....	31	3591011.....	37		
1191259C	9	1340225C	16	2190063.....	31	5000003.....	27		
1191260C 7, 9		1340226C	16	2190100C	30	8008005.....	37		
1191261C	9	1340230C	16	2190101C	30	8308009.....	37		
1191269C	8	1340240C	16	2190102C	30	8308010.....	37		
1191270C	8	1340250C	16	2199820.....	35	8308051.....	37		
1191271C	8	1340260C	17	2199821.....	35	8308052.....	37		
1191272C	11	1340401C	15	2199822.....	35	8308053.....	37		
1191273C	11	1340402C	15	2199823.....	35	AB17530C	34, 35		
1191274C	11	1340451C	15	2199824.....	35	AC202C	27		
1191369C	10	1340701C	15	2199825.....	35	AC203C-SA2..	34, 35		
1191370C	10	1340751C	15	2199826.....	35	AC210A1	27		
1191371C	10	1341001C 14, 34, 35		2199827.....	35	AC210A2	27		
1191372C	10	1341004C 14, 34, 35		3100409.....	21, 23	AC215A	27		
1191379C	10	1341006C 14, 34, 35		3100410.....	21, 23	AC215A1	27		
1191380C	10	1341050C	14	3100411.....	21, 23	AC215A2	27		
1191381C	10	1341051C	14	3100415.....	21, 23	AC225A1	27		
1191382C	10	1341101C 12, 17		3100416.....	21, 23	AC230A1	27		
1191383C	10	1341102C	17	3100417.....	21, 23	AC350C	26		
1191384C	10	1342001C	14	3100428.....	21, 23	AC351C	26		
1191385C	10	1342002C	14	3100429.....	21, 23	AJ301A	30		
1191386C	10	1342101C	17	3100430.....	21, 23	AJ302A	30		
1191429C	9	1342102C	17	3100434.....	23	AJ303A	30		
1191430C	9	1342125C	17	3100435.....	22, 23	AJ408CG-6	30		



INNOVATION THAT BRINGS WORKERS AT HEIGHT HOME SAFELY.

Capital Safety™ is a global company solely dedicated to fall protection and rescue. Our focus is clear.
It continually drives us to design and manufacture safe gear that workers want to wear.

Innovation means understanding the industries we serve. We listen to the workers in the field, employ the
most engineers, customize solutions, register more new patents and introduce more products.

Capital Safety has the best quality and largest breadth of products in the industry.

But we're more than a product company.

We take an innovative approach in bringing our products to the field. We have created international partnerships
and a vast network of certified installers and service centers. We offer on-site and in-house training.
And we're ISO 9001-2008 certified for customer service, as well as manufacturing and engineering.

Capital Safety is one of the world's leading manufacturers in fall protection and
rescue equipment, with decades of experience and a legacy of innovation.

Look for complete solutions in our extensive line of DBI-SALA® and Protecta® products.



Capital Safety - Canada: 800 387 7484
www.capitalsafety.com info@capitalsafety.com