


Cable Ties and Accessories

3M™ Cable Ties are designed to secure wire bundles and harness components quickly, without slipping. Featuring a self-locking head and a locking mechanism, they are designed to handle temperatures up to 185°F (85°C). Available in several strengths and lengths, including screw mount. Most are plenum rated and USA made.

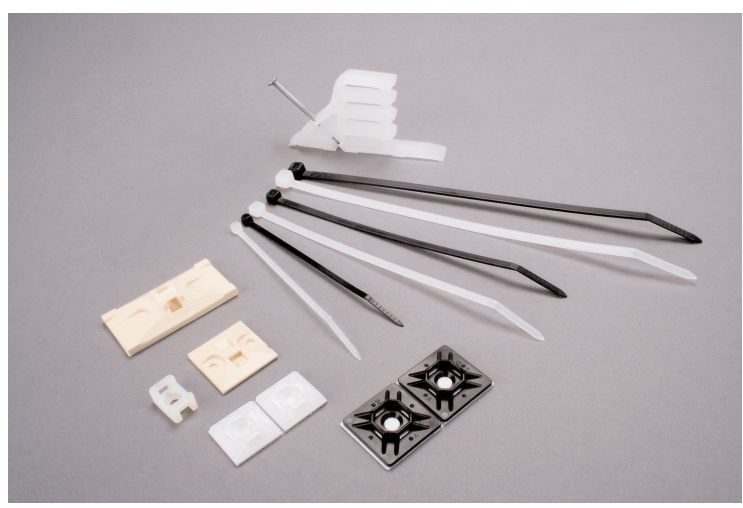

Cable Ties Part Number Naming Convention

The product name has been changed to better identify the characteristics of each tie.

CT D C T X - P

Example:
Catalog Number: CT4BK18-C

| CT | D | C | T | X | - | P |
|--|--|---|---|---|---|--|
| CT = Cable Ties CTB = Mounting Bases | D = Dimensions (inches) Ties = Length Bases = Length X Width | C = Color BK = Black NT = Natural RD = Red BG = Beige | T* = Tensile (pounds) 18 = Miniature 40 = Intermediate 50 = Standard 120 = Light Heavy Duty 175 = Heavy Duty | X = Special Features _ = Standard Tie (Blank) S = Screw Mount A = Adhesive Mount | | P = Package Size (Roman Numeral) M = 1,000 D = 500 C = 100 L = 50 |

*Cable Tie Base Part Numbers do not include Tensile.

Section

Page


| | |
|---|----------------|
| 3M™ Cable Ties | 109-115 |
| 3M™ Miniature Cable Ties (18 lb, 8 kg) | 109 |
| 3M™ Intermediate Cable Ties (40 lb, 18 kg) | 110 |
| 3M™ Standard Cable Ties (50 lb, 23 kg)..... | 111 |
| 3M™ Light Heavy Duty Cable Ties (120 lb, 54 kg)..... | 112 |
| 3M™ Heavy Duty Cable Ties (175 lb, 79 kg) | 113 |
| 3M™ Screw Mount Ties (Standard #10 Stud) | 114 |
| 3M™ Cable Ties - Cable Tie Assortment Packs | 115 |
| 3M™ Cable Bases and Stackers | 115-116 |
| 3M™ Cable Stackers..... | 115 |
| 3M™ Cable Tie Mounting Bases | 116 |
| 3M™ Hook and Loop Fasteners | 117-118 |
| 3M™ Hook and Loop Fasteners..... | 117 |
| 3M™ Scotchmate™ Reclosable Fasteners..... | 118 |
| 3M™ Dual Lock™ Fasteners | 119-120 |
| 3M™ Dual Lock™ Fasteners | 119 |
| 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | 120 |


3M™ Cable Ties


3M™ Miniature Cable Ties (18 lb, 8 kg)

3M™ Miniature Cable Ties are small lightweight cable ties for use in holding applications up to 18 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 18 lb (8 kg)
 Max. Temperature Use 185°F (85°C)
 RoHS 2011/65/EU Yes

Agency Approvals 

Country of Origin 

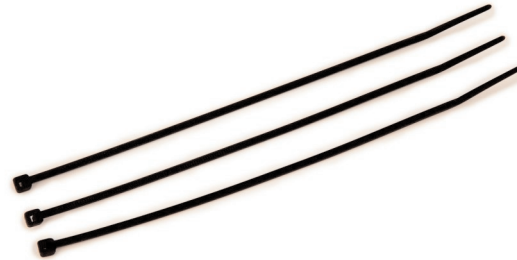


| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Min. Bundle Dia. | Max. Bundle Dia. | Items per Bag | Items per Case |
|-----------|--------------|---------|---------------|-------------------|-------------------|-------------------|--------------------|--------------------|---------------|----------------|
| CT4BK18-C | 051128-59273 | Black | Yes | 4.10" (104 mm) | 0.10" (3,0 mm) | 0.04" (1,0 mm) | 0.062" (1,6 mm) | 0.75" (19,1 mm) | 100 | 1000 |
| CT4BK18-M | 051128-59274 | Black | Yes | 4.10" (104 mm) | 0.10" (3,0 mm) | 0.04" (1,0 mm) | 0.062" (1,6 mm) | 0.75" (19,1 mm) | 1000 | 10,000 |
| CT4NT18-C | 051128-59275 | Natural | No | 4.10" (104 mm) | 0.10" (3,0 mm) | 0.04" (1,0 mm) | 0.062" (1,6 mm) | 0.75" (19,1 mm) | 100 | 1000 |
| CT4NT18-M | 051128-59276 | Natural | No | 4.10" (104 mm) | 0.10" (3,0 mm) | 0.04" (1,0 mm) | 0.062" (1,6 mm) | 0.75" (19,1 mm) | 1000 | 10,000 |
| CT6BK18-C | 051128-59277 | Black | Yes | 6.10" (155 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.25" (31,8 mm) | 100 | 1000 |
| CT6NT18-C | 051128-59278 | Natural | No | 6.10" (155 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.25" (31,8 mm) | 100 | 1000 |
| CT6NT18-M | 051128-59279 | Natural | No | 6.10" (155 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.25" (31,8 mm) | 1000 | 10,000 |
| CT8BK18-C | 051128-59280 | Black | Yes | 8.10" (206 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 100 | 1000 |
| CT8BK18-M | 051128-59281 | Black | Yes | 8.10" (206 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 1000 | 10,000 |
| CT8NT18-C | 051128-59282 | Natural | No | 8.10" (206 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 100 | 1000 |
| CT8NT18-M | 051128-59283 | Natural | No | 8.10" (206 mm) | 0.10" (3,0 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 1000 | 10,000 |

3M™ Cable Ties


3M™ Intermediate Cable Ties (40 lb, 18 kg)

3M™ Intermediate Cable Ties are a great solution for holding applications up to 40 lb. They provide an economical alternative to standard cable ties when higher tensile strength is not required. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 40 lb (18 kg)
 Max. Temperature Use 185°F (85°C)
 RoHS 2011/65/EU Yes

Agency Approvals 

Country of Origin 

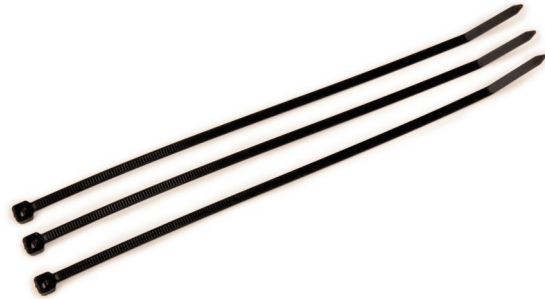


| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Min. Bundle Dia. | Max. Bundle Dia. | Items per Bag | Items per Case |
|-----------|--------------|---------|---------------|-------------------|-------------------|-------------------|--------------------|--------------------|---------------|----------------|
| CT6BK40-C | 051128-59284 | Black | Yes | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.25" (31,8 mm) | 100 | 1000 |
| CT6BK40-M | 051128-59285 | Black | Yes | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.25" (31,8 mm) | 1000 | 10,000 |
| CT6NT40-C | 051128-59286 | Natural | No | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.25" (31,8 mm) | 100 | 1000 |
| CT6NT40-M | 051128-59287 | Natural | No | 5.80" (147 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.25" (31,8 mm) | 1000 | 10,000 |
| CT8BK40-C | 051128-59288 | Black | Yes | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 100 | 1000 |
| CT8BK40-M | 051128-59289 | Black | Yes | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 1000 | 10,000 |
| CT8NT40-C | 051128-59290 | Natural | No | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 100 | 1000 |
| CT8NT40-M | 051128-59291 | Natural | No | 8.90" (226 mm) | 0.14" (3,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 1000 | 10,000 |


3M™ Cable Ties

3M™ Standard Cable Ties (50 lb, 23 kg)

3M™ Standard Cable Ties are the most common sized ties and provide a standard level of performance for general-use holding applications up to 50 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 50 lb (23 kg)
 Max. Temperature Use 185°F (85°C)
 RoHS 2011/65/EU Yes

Agency Approvals 

Country of Origin 



| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Min. Bundle Dia. | Max. Bundle Dia. | Items per Bag | Items per Case |
|------------|--------------|---------|---------------|-----------------|----------------|----------------|------------------|------------------|---------------|----------------|
| CT8BK50-C | 051128-59293 | Black | Yes | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.87" (47,5 mm) | 100 | 1000 |
| CT8BK50-M | 051128-59294 | Black | Yes | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.87" (47,5 mm) | 1000 | 10,000 |
| CT8NT50-C | 051128-59297 | Natural | No | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.87" (47,5 mm) | 100 | 1000 |
| CT8NT50-M | 051128-59299 | Natural | No | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 1.87" (47,5 mm) | 1000 | 10,000 |
| CT8RD50-C | 051128-59559 | Red | No | 7.60" (193 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 2.00" (50,8 mm) | 100 | 1000 |
| CT11BK50-C | 051128-59300 | Black | Yes | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 3.00" (76,2 mm) | 100 | 1000 |
| CT11BK50-D | 051128-59301 | Black | Yes | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 3.00" (76,2 mm) | 500 | 5000 |
| CT11NT50-C | 051128-59302 | Natural | No | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 3.00" (76,2 mm) | 100 | 1000 |
| CT11NT50-D | 051128-59303 | Natural | No | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 3.00" (76,2 mm) | 500 | 5000 |
| CT11RD50-C | 051128-59560 | Red | No | 11.10" (282 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 3.00" (76,2 mm) | 100 | 1000 |
| CT15BK50-C | 051128-59304 | Black | Yes | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 4.00" (101,6 mm) | 100 | 500 |
| CT15BK50-D | 051128-59305 | Black | Yes | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 4.00" (101,6 mm) | 500 | 2500 |
| CT15NT50-C | 051128-59307 | Natural | No | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 4.00" (101,6 mm) | 100 | 500 |
| CT15NT50-D | 051128-59309 | Natural | No | 14.60" (371 mm) | 0.18" (4,6 mm) | 0.05" (1,3 mm) | 0.062" (1,6 mm) | 4.00" (101,6 mm) | 500 | 2500 |

3M™ Cable Ties

3M™ Light Heavy Duty Cable Ties (120 lb, 54 kg)

3M™ Light Heavy Duty Cable Ties are commonly used in more demanding commercial and industrial jobs when extra strength is required to hold up to 120 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

Tensile Strength 120 lb (54 kg)
Max. Temperature Use 185°F (85°C)
RoHS 2011/65/EU Yes

Agency Approvals



Country of Origin




| Order No. | UPC | Color | UV Resistance | Length | Width | Thickness | Min. Bundle Dia. | Max. Bundle Dia. | Items per | Items per Case |
|-------------|--------------|---------|---------------|--------------------|-------------------|-------------------|-------------------|---------------------|-----------|----------------|
| CT8BK120-L | 051128-59310 | Black | Yes | 9.00" (229 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 0.19" (4,8 mm) | 2.00" (50,8 mm) | 50 | 500 |
| CT8NT120-L | 051128-59311 | Natural | No | 9.00" (229 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 0.19" (4,8 mm) | 2.00" (50,8 mm) | 50 | 500 |
| CT15BK120-C | 051128-59312 | Black | Yes | 15.00" (381 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 0.19" (4,8 mm) | 4.00" (101,6 mm) | 100 | 500 |
| CT15BK120-D | 051128-59313 | Black | Yes | 15.00" (381 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 0.19" (4,8 mm) | 4.00" (101,6 mm) | 500 | 2500 |
| CT15NT120-C | 051128-59315 | Natural | No | 15.00" (381 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 0.19" (4,8 mm) | 4.00" (101,6 mm) | 100 | 500 |
| CT15NT120-D | 051128-59317 | Natural | No | 15.00" (381 mm) | 0.30" (7,6 mm) | 0.07" (1,8 mm) | 0.19" (4,8 mm) | 4.00" (101,6 mm) | 500 | 2500 |

3M™ Cable Ties

3M™ Heavy Duty Cable Ties (175 lb, 79 kg)

3M™ Heavy Duty Cable Ties provide an added level of strength plus a larger bundle diameter for heavy duty jobs up to 175 lb. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.

The 36" and 48" ties are also suitable for use with UL non-metallic air ducts and air connectors.

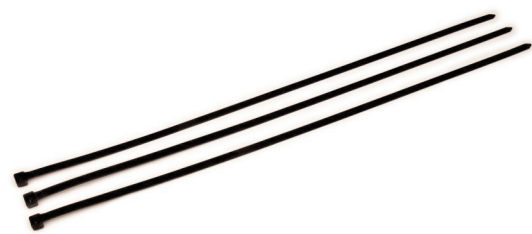

Tensile Strength 175 lb (79 kg)
Max. Temperature Use 185°F (85°C)
RoHS 2011/65/EU Yes
Agency Approvals



| | CT24BK175-L | CT24NT175-L | CT36BK175-L |
|-------------------|-----------------|------------------|------------------|
| UPC | 051128-59318 | 051128-59319 | 051128-59320 |
| Color | Black | Natural | Black |
| UV Resistance | Yes | No | Yes |
| Length | 24.00" (610 mm) | 24.00" (610 mm) | 36.00" (914 mm) |
| Width | 0.34" (8,6 mm) | 0.34" (8,6 mm) | 0.34" (8,6 mm) |
| Thickness | 0.09" (2,3 mm) | 0.09" (2,3 mm) | 0.09" (2,3 mm) |
| Min. Bundle Dia. | 0.19" (4,8 mm) | 0.19" (4,8 mm) | 0.19" (4,8 mm) |
| Max. Bundle Dia. | 7.20" (183 mm) | 7.20" (183 mm) | 11.00" (279 mm) |
| Items per Bag | 50 | 50 | 50 |
| Items per Case | 500 | 500 | 500 |
| Country of Origin | | | |
| | CT36NT175-L | CT48BK175-L | CT48NT175-L |
| UPC | 051128-59321 | 051128-59322 | 051128-59323 |
| Color | Natural | Black | Natural |
| UV Resistance | No | Yes | No |
| Length | 36.00" (914 mm) | 47.90" (1217 mm) | 47.90" (1217 mm) |
| Width | 0.34" (8,6 mm) | 0.36" (9,1 mm) | 0.36" (9,1 mm) |
| Thickness | 0.09" (2,3 mm) | 0.07" (1,8 mm) | 0.07" (1,8 mm) |
| Min. Bundle Dia. | 0.19" (4,8 mm) | 1.5" (38 mm) | 1.5" (38 mm) |
| Max. Bundle Dia. | 11.00" (279 mm) | 14.60" (372 mm) | 14.60" (372 mm) |
| Items per Bag | 50 | 50 | 50 |
| Items per Case | 500 | 500 | 500 |
| Country of Origin | | - | - |

3M™ Cable Ties

3M™ Screw Mount Ties (Standard #10 Stud)

3M™ Screw Mount Cable Ties allow precise and controlled positioning of standard and heavy duty cables up to 120 lb. The easy-to-use ties can be quickly mounted to walls and structures with screws, bolts or rivets for added security. Ties come in UV-resistant black for outdoor and indoor use as well as natural (white) nylon for an economical solution indoors.



Stud Size 10

Max. Temperature Use 185°F (85°C)

RoHS 2011/65/EU Yes

Agency Approvals



Country of Origin



| | CT8BK50S-C | CT8BK50S-M | CT8NT50S-C | CT8NT50S-M |
|------------------|---------------------|---------------------|---------------------|---------------------|
| UPC | 051128-59292 | 051128-59295 | 051128-59296 | 051128-59298 |
| Color | Black | Black | Natural | Natural |
| UV Resistance | Yes | Yes | No | No |
| Length | 8.60" (218 mm) | 8.60" (218 mm) | 8.60" (218 mm) | 8.60" (218 mm) |
| Width | 0.18" (4,6 mm) | 0.18" (4,6 mm) | 0.18" (4,6 mm) | 0.18" (4,6 mm) |
| Thickness | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.06" (1,5 mm) |
| Tensile Strength | 50 lb (23 kg) | 50 lb (23 kg) | 50 lb (23 kg) | 50 lb (23 kg) |
| Min. Bundle Dia. | 0.062" (1,6 mm) | 0.062" (1,6 mm) | 0.062" (1,6 mm) | 0.062" (1,6 mm) |
| Max. Bundle Dia. | 2.00" (50,8 mm) | 2.00" (50,8 mm) | 2.00" (50,8 mm) | 2.00" (50,8 mm) |
| Items/ Bag | 100 | 1000 | 100 | 1000 |
| Items/ Case | 1000 | 10,000 | 1000 | 10,000 |
| | CT15NT50S-L | CT15NT50S-D | CT15NT120S-L | CT15NT120S-D |
| UPC | 051128-59306 | 051128-59308 | 051128-59314 | 051128-59316 |
| Color | Natural | Natural | Natural | Natural |
| UV Resistance | No | No | No | No |
| Length | 15.10" (384 mm) | 15.10" (384 mm) | 15.70" (399 mm) | 15.70" (399 mm) |
| Width | 0.18" (4,6 mm) | 0.18" (4,6 mm) | 0.30" (7,6 mm) | 0.30" (7,6 mm) |
| Thickness | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.07" (1,8 mm) | 0.07" (1,8 mm) |
| Tensile Strength | 50 lb (23 kg) | 50 lb (23 kg) | 120 lb (54 kg) | 120 lb (54 kg) |
| Min. Bundle Dia. | 0.062" (1,6 mm) | 0.062" (1,6 mm) | 0.19" (4,8 mm) | 0.19" (4,8 mm) |
| Max. Bundle Dia. | 4.00" (102,6 mm) | 4.00" (102,0 mm) | 4.00" (102,0 mm) | 4.00" (102,0 mm) |
| Items/ Bag | 50 | 500 | 50 | 500 |
| Items/ Case | 500 | 2500 | 500 | 2500 |

3M™ Cable Ties

3M™ Cable Ties - Cable Tie Assortment Packs

3M™ Cable Tie Assortment Pack contains 100 of our most commonly used ties. Includes three sizes, four lengths and both colors.

RoHS 2011/65/EU Yes

Agency Approvals 

Country of Origin 



| Order No. | UPC | Product Name | Description | Items per Pack | Items per Case |
|-----------|--------------|-------------------------------------|---|----------------|----------------|
| CT06220 | 051128-59324 | 3M™ Cable Tie Assortment Pack 06220 | 3M™ Cable Ties, Assortment Pack, 3 Sizes, 4 Lengths, 2 Natural & Black Colors, 100 in Pack. | 100 | 1000 |

3M™ Cable Bases and Stackers


3M™ Cable Stackers

3M™ Cable Stackers organize cable runs and aid in identification, putting an end to tangled wires and the potential heating that could occur when cables are held together tightly under a single fastener. Easy installation simplifies compliance with the spacing requirements of the National Electrical Code, article 300-4-(d) and the Canadian Electric Code Part I, Section 12-516. Made from reclaimed plastic.



Cable Tie Type Stacker

Color White

RoHS 2011/65/EU Yes

Country of Origin 




| | SI-1 | SIFS-1 |
|----------------|---|--|
| |  |  |
| UPC | 054007-49554 | 054007-49918 |
| Product Name | 3M™ Cable Stacker SI-1 | 3M™ Furring Strip Cable Stacker SIFS-1 |
| Description | The 3M™ Cable Stacker SI-1 centers multiple cables on a 2 X 4 framing member. | The 3M™ Furring Strip Cable Stacker SIFS-1 routes, fastens, and supports CATV, telephone, security and instrumentation cables. |
| Items per Bag | 25 | 25 |
| Items per Case | 250 | 250 |

3M™ Cable Bases and Stackers

3M™ Cable Tie Mounting Bases

3M™ Cable Tie Bases make mounting wire and cable a quick, easy and secure process. 2-way and 4-way configurations as well as adhesive-backed and screw mount options offer flexible mounting alternatives to meet a variety of applications.

RoHS 2011/65/EU Yes

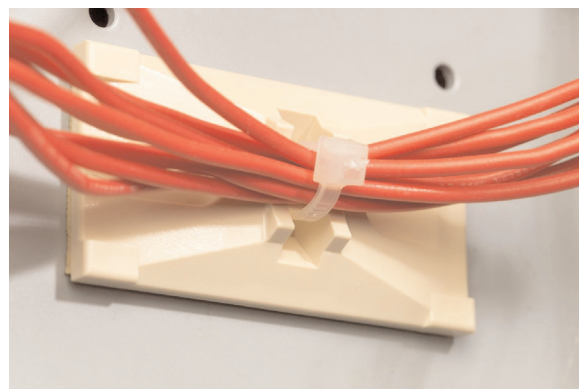

| | CTB2X1BGA-C | CTB1X1BGA-C | CTB75X75NTA-C | CTB75X75BKA-C |
|-------------------|----------------------|------------------------------------|----------------------|----------------------|
| | | | | |
| UPC | 054007-06290 | 054007-06292 | 054007-06294 | 054007-06295 |
| Material | ABS | ABS | Nylon | Nylon |
| Mount Type | Foam Backed Adhesive | Foam Backed Adhesive (Screw Mount) | Foam Backed Adhesive | Foam Backed Adhesive |
| Color | Beige | Beige | Natural | Black (UV Resistant) |
| Length | 2.0" (51 mm) | 1.0" (25 mm) | 0.74" (19 mm) | 0.74" (19 mm) |
| Width | 1.0" (25 mm) | 1.2" (25 mm) | 0.74" (19 mm) | 0.74" (19 mm) |
| Height | 0.35" (8,9 mm) | 0.15" (3,8 mm) | 0.22" (5,6 mm) | 0.22" (5,6 mm) |
| Slot Width | 0.21" (5,3 mm) | 0.21" (5,3 mm) | 0.21" (5,3 mm) | 0.21" (5,3 mm) |
| Slot Height | 0.18" (4,5 mm) | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.06" (1,5 mm) |
| Items per Bag | 100 | 100 | 100 | 100 |
| Items per Case | 500 | 500 | 500 | 500 |
| Country of Origin | | | | |
| | CTB1X1NTA-C | CTB1X1BKA-C | CTB60X41NTS-C | CTB87X62NTS-C |
| | | | | |
| UPC | 054007-06296 | 054007-06297 | 054007-95667 | 054007-95668 |
| Material | Nylon | Nylon | Nylon | Nylon |
| Mount Type | Foam Backed Adhesive | Foam Backed Adhesive | Screw Mount | Screw Mount |
| Color | Natural | Black (UV Resistant) | Natural | Natural |
| Length | 0.99" (25 mm) | 0.99" (25 mm) | 0.60" (15 mm) | 0.87" (22 mm) |
| Width | 0.99" (25 mm) | 0.99" (25 mm) | 0.41" (10 mm) | 0.62" (16 mm) |
| Height | 0.22" (5,6 mm) | 0.22" (5,6 mm) | 0.28" (7,0 mm) | 0.38" (10 mm) |
| Slot Width | 0.21" (5,3 mm) | 0.21" (5,3 mm) | 0.21" (5,3 mm) | 0.35" (8,9 mm) |
| Slot Height | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.06" (1,5 mm) | 0.10" (2,5 mm) |
| Items per Bag | 100 | 100 | 100 | 100 |
| Items per Case | 500 | 500 | 500 | 500 |
| Country of Origin | | | - | - |

3M™ Hook and Loop Fasteners

3M™ Hook and Loop Fasteners

When your product requires thousands of easy openings and secure closings, eliminate the work and weight of metal closures and choose 3M™ Hook and Loop Fasteners. The product forms a secure bond when the stiff hooks of one side mesh with pliable loops on the other.



RoHS 2011/65/EU Yes

| Order No. | UPC | Product Name | Description | Rolls per Case |
|---------------------------|--------------|--|----------------------------|----------------|
| SJ-3526N-Hook-Black-1-1/2 | 021200-86383 | 3M™ Fastener Hook SJ3526 | Hook (Black) 1 1/2"x50 yd | 2 |
| SJ3526N-White-2"x50yd | 021200-86247 | 3M™ Fastener Hook SJ3526 | Hook (White) 2"x50yd | 2 |
| SJ3527N-1"x50yd-White | 021200-86253 | 3M™ Fastener Loop SJ3527 | Loop (White) 1"x50 yd Bulk | 3 |
| SJ3527N-2"x50yd-Black | 021200-86255 | 3M™ Fastener Loop SJ3527 | Loop (Black) 2"x50 yd Bulk | 2 |
| SJ3527N-2"x50yd-White | 021200-86256 | 3M™ Fastener Loop SJ3527 | Loop (White) 2"x50 yd Bulk | 2 |
| SJ3526N-Beige-1"x50yd | 021200-86242 | 3M™ Fastener Hook SJ3526 | Hook (Beige) 1"x50yd | 3 |
| SJ3526N-Beige-2"x50yd | 021200-86246 | 3M™ Fastener Hook SJ3526 | Hook (Beige) 2"x50yd | 2 |
| SJ3526N-Beige-5/8"x50yd | 021200-86239 | 3M™ Fastener Hook SJ3526 | Hook (Beige) 5/8"x50yd | 4 |
| SJ3401-1"x50yd-Black | 021200-62538 | 3M™ Fastener Loop SJ3401 | Loop (Black) 1"x50 yd | 12 |
| SJ3401-1"x50yd-White | 021200-62539 | 3M™ Fastener Loop SJ3401 | Loop (White) 1"x50 yd | 12 |
| SJ3401-2"x50yd | 021200-62544 | 3M™ Fastener Loop SJ3401 | Loop (Black) 2"x50 yd | 6 |
| SJ3402-1"x50yd-Black | 021200-62553 | 3M™ Fastener Hook SJ3402 | Hook (Black) 1"x50 yd | 12 |
| SJ3402-1"x50yd-White | 021200-62554 | 3M™ Fastener Hook SJ3402 | Hook (White) 1"x50 yd | 12 |
| SJ3402-2"x50yd | 021200-62559 | 3M™ Fastener Hook SJ3402 | Hook (Black) 2"x50 yd | 6 |
| SJ3402-3/4"x50yd-Black | 021200-62550 | 3M™ Fastener Hook SJ3402 | Hook (Black) 3/4"x50 yd | 16 |
| SJ-3522 | 021200-86236 | 3M™ Fastener Plasticizer Resistant Hook SJ3522 | Hook (Black) 1"x50 yd | 3 |
| SJ-3523 | 021200-86238 | 3M™ Fastener Plasticizer Resistant Loop SJ3523 | Loop (Black) 1"x50 yd | 3 |
| SJ3526N-2"x50yd | 021200-86245 | 3M™ Fastener Hook SJ3526 | Hook (Black) 2"x50 yd | 2 |
| SJ3526N-Black-5/8"x50yd | 021200-86240 | 3M™ Fastener Hook SJ3526 | Hook (Black) 5/8"x50yd | 4 |
| SJ-3526N-Hook-Black-1" | 021200-86243 | 3M™ Fastener Hook SJ3526 | Hook (Black) 1"x50 yd | 3 |
| SJ-3526N-Hook-White-5/8" | 021200-86241 | 3M™ Fastener Hook SJ3526 | Hook (White) 5/8"x50 yd | 4 |
| SJ3527N-Beige-1"x50yd | 021200-86251 | 3M™ Fastener Loop SJ3527 | Loop (Beige) 1"x50yd | 3 |
| SJ3527N-Beige-2"x50yd | 021200-86254 | 3M™ Fastener Loop SJ3527 | Loop (Beige) 2"x50yd | 2 |
| SJ3527N-Beige-5/8"x50yd | 021200-86248 | 3M™ Fastener Loop SJ3527 | Loop (Beige) 5/8"x50yd | 4 |
| SJ3527N-Black-1.5"x50yd | 021200-86167 | 3M™ Fastener Loop SJ3527 | Loop (Black) 1.5"x50yd | 2 |
| SJ-3527N-Loop-Black-1" | 021200-86252 | 3M™ Fastener Loop SJ3527 | Loop (Black) 1"x50 yd | 3 |
| SJ3527N-White-5/8"x50yd | 021200-86250 | 3M™ Fastener Loop SJ3527 | Loop (White) 5/8"x50yd | 4 |
| SJ-3532N-Hook-Black-1" | 021200-86259 | 3M™ Fastener Hook SJ3532 | Hook (Black) 1"x50 yd | 3 |
| SJ-3533N-Loop-Black-1" | 021200-86266 | 3M™ Fastener Loop SJ3533 | Loop (Black) 1"x50 yd | 3 |
| SJ-3571-1"x50yd-Black | 021200-86285 | 3M™ Fastener Loop SJ3571 | Loop (Black) 1"x50 yd | 3 |
| SJ3571-1"x50yd-White | 021200-87277 | 3M™ Fastener Loop SJ3571 | Loop (White) 1"x50 yd | 3 |
| SJ3571-5/8"x50yd-Black | 021200-86289 | 3M™ Fastener Loop SJ3571 | Loop (Black) 5/8"x50 yd | 4 |
| SJ3571-White-2"x50yd | 021200-86467 | 3M™ Fastener Loop SJ3571 | Loop (White) 2"x50yd | 2 |
| SJ-3572-1"x50yd-Black | 021200-86286 | 3M™ Fastener Hook SJ3572 | Hook (Black) 1"x50 yd | 3 |
| SJ3572-2"x50yd-Black | 021200-86377 | 3M™ Fastener Hook SJ3572 | Hook (Black) 2"x50 yd | 2 |
| SJ3572-5/8"x50yd-Black | 021200-86290 | 3M™ Fastener Hook SJ3572 | Hook (Black) 5/8"x50 yd | 4 |

3M™ Hook and Loop Fasteners

3M™ Scotchmate™ Reclosable Fasteners

When your project requires the flexibility of many easy openings and secure closings, but you don't want the weight of metal closures try 3M™ Hook and Loop Fasteners in mini-pack sizes. Available in various adhesive options and product sizes in a quantity appropriate for small projects and testing.

RoHS 2011/65/EU Yes



| Order No. | UPC | Product Name | Description | Rolls per Case |
|---------------------|--------------|---|---|----------------|
| MP3401/MP3402-Black | 051131-06465 | 3M™ Scotchmate™ Reclosable Fastener MP3401 | Reclosable Fastener (Black) 1"x5 yd | 5 |
| MP3401/MP3402-White | 051131-06464 | 3M™ Scotchmate™ Reclosable Fastener MP3402 | Reclosable Fastener (White) 1"x5 yd | 5 |
| MP-3526/27N-Black | 051131-06481 | 3M™ Scotchmate™ Reclosable Fastener MP3526/MP3527 | Hook and Loop Fastener (Black) 1"x5 yd Mini Pack (Roll) | 5 |
| MP-3526/27N-White | 051131-06488 | 3M™ Scotchmate™ Reclosable Fastener MP3526/MP3527 | Hook and Loop Fastener (White) 1"x5 yd Mini Pack (Roll) | 5 |

3M™ Dual Lock™ Fasteners

3M™ Dual Lock™ Fasteners

Strong. Hidden. Removable. 3M™ Dual Lock™ Reclosable Fasteners are a fastening solution that can replace screws, bolts and rivets. The fasteners contain hundreds of mushroom-shaped stems that audibly "SNAP" together to form a secure attachment with strong adhesive backings that adhere to your substrate.

RoHS 2011/65/EU Yes




| Order No. | UPC | Product Name | Description | Rolls per Case |
|-----------------------|--------------|--|---|----------------|
| MP-3541/42-Black | 051131-06483 | 3M™ Dual Lock™ Reclosable Fastener MP3541/MP3542 400/170 | Reclosable Fastener (Black) 400 stems per square inch, 1"x5 yd | 5 |
| MP-3551/52-Black | 051131-06484 | 3M™ Dual Lock™ Reclosable Fastener MP3551/MP3552 400/170 | Reclosable Fastener (Black) 400 stems per square inch., 1"x5 yd | 5 |
| MP-3560-Clear | 051131-06463 | 3M™ Dual Lock™ Reclosable Fastener MP3560 250 | Reclosable Fastener (Clear) 250 stems per square inch, 1"x5 yd | 5 |
| SJ-3463 | 021200-24993 | 3M™ Dual Lock™ Reclosable Fastener SJ3463 400 | Reclosable Fastener (Black) rigid backed circle with hole, 400 stems per square inch, 1 3/16" diameter with 0.16 in hole. | 1000 |
| SJ3540-1"x50yd-Black | 021200-65812 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3540 | Reclosable Fastener (Black) 250 stems per square inch, 1"x50 yd | 2 |
| SJ-3541-1"x50yd-Black | 021200-86277 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3541 | Reclosable Fastener (Black) 400 stems per square inch, 1"x50 yd | 2 |
| SJ-3542-1"x50yd-Black | 021200-86309 | 3M™ Dual Lock™ Reclosable Fastener SJ3542 170 | Reclosable Fastener (Black) 170 stems per square inch, 1"x50 yd | 2 |
| SJ-3560-1"x50yd-Clear | 021200-86282 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3560 | Reclosable Fastener (Clear) 250 stems per square inch, 1"x50 yd | 2 |
| SJ-3748 | 021200-63628 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3748 Black | Pop-in, Christmas tree style reclosable fastener with a 16.2 mm stud, 400 stems per square inch, 1 inch x 1 inch. | 5000 |
| SJ-3755 | 021200-24129 | 3M™ Dual Lock™ Reclosable Fastener 250 SJ3755 Black | Black, polypropylene reclosable fastener with rigid backing, rigid backed circle with one hole, 250 stems per square inch, 1 1/8 inch (28.5 mm) outside diameter. | 1000 |
| SJ-3762 | 021200-24131 | 3M™ Dual Lock™ Reclosable Fastener 400 SJ3762 Black | Black, polypropylene reclosable fastener with rigid backing, rigid backed circle with one hole, 400 stems per square inch, 1 1/8 inch (28.5 mm) outside diameter. | 1000 |
| SJ-3767 | 021200-24128 | 3M™ Dual Lock™ Reclosable Fastener SJ3767 Black | Black, polyolefin plastic reclosable square fastener with two counter-sunk holes, 400 stem per square inch, 1 1/2 inch (38 mm). | 1000 |

3M™ Dual Lock™ Fasteners

3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570

Low to medium temperature performance. Bonds well to metals (aluminum, stainless steel), glass, many plastics (polypropylene, polyethylene, polycarbonate, ABS) powder coated paints and medium to low surface energy materials. Designed for indoor use. Products include SJ4570 and SJ4575.

RoHS 2011/65/EU Yes

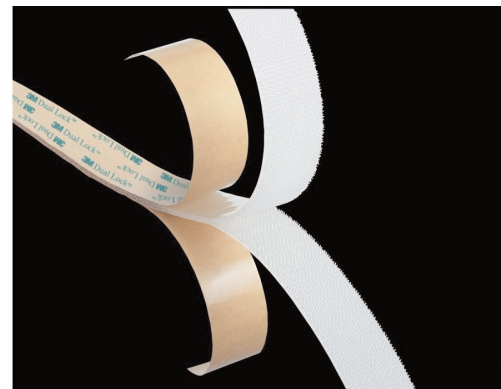

| Order No. | UPC | Product Name | Description | Rolls per Case |
|------------------------|--------------|---|---|----------------|
| SJ4570-1"x50yd-Clear | 021200-44883 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 1 in x 50 yd 0.105 in (2,7 mm). | 2 |
| SJ4570-2"x50yd-Clear | 021200-46070 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 2 in x 50 yd 0.105 in (2,7 mm). | 1 |
| SJ4570-3/4"x50yd-Clear | 021200-46239 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 3/4 in x 50 yd 0.105 in (2,7 mm). | 2 |
| SJ4570-4"x50yd-Clear | 021200-46071 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 4 in x 50 yd 0.105 in (2,7 mm). | 1 |
| SJ4570-4"x75yd-Clear | 021200-46196 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 4 in x 75 yd 0.105 in (2,7 mm). | 1 |
| SJ4570-5/8"x50yd-Clear | 021200-45075 | 3M™ Dual Lock™ Low Profile Reclosable Fastener SJ4570 | Low Profile Clear, 5/8 in x 50 yd 0.105 in (2,7 mm). | 3 |