Note: Spray Valve features are available in this G-12 *Pre-Rinse Unit* section on pages A54-A55

	SPRAY VALVE MODEL	DESCRIPTION	GPM (at 60 PSI)	CLEANABILITY (ASTM F2324)	KEY DIFFERENTIATOR	APPLICATION
	B-0107	Spray Valve	1.15 GPM/ (4.35 Lpm)	7.5 Ozf (212 Gramf)	The industry standard spray valve with legendary performance and reliability	Designed for heavy use in commercial kitchens. Superior quality and great for most general applications, and backed by decades of trusted satisfaction
	B-0107-035	35° Angle Spray Valve				
	B-0107-090	90° Angle Spray Valve				
	B-0107-M	B-0107 Master carton (12)				
	B-0107-QD	Quick-disconnect model				
	B-0107-C	Ultimate Low Flow Spray Valve	0.65 GPM/ (2.5 Lpm)	4.4 Ozf (125 Gramf)	B-0107-C models have the lowest flow rate of any commercial brand; is endorsed by the Green Restaurant Association	Rinsing trays and plates without baked-on residue. Choose this spray valve when water and energy conservation are the foremost need, but you want the B-0107 reputation
	B-0107-C35	Ultimate Low Flow 35° Angle Spray Valve				
	B-0107-C90	Ultimate Low Flow 90° Angle Spray Valve				
	B-0107-CM	Master carton of -C model (12)				
	B-0107-J	Low Flow Spray Valve	1.07 GPM (4.1 Lpm)	7.2 Ozf (204 Gramf)	Powerful cleaning capabiliy; combines time, water and energy savings with a reduction in cleaning times	Clean baked-on or sticky residue while still conserving water. This spray valve saves time, energy and water while cleaning stubborn residue effectively
	B-0107-J90	Low Flow 90° Angle Spray Valve				
	B-0108	JeTSpray Ergonomic Spray Valve	1.07 GPM/ (4.1 LPM)	7.2 Ozf (204 Gramf)	Unique ergonomic design and easy lock-down mechanism for reduced user fatigue and eliminated heat transfer. Now with 1.07 GPM energy- and water-saving flow rate	Designed for heavy use in commercial kitchens where employees use for for extended periods. Superior quality and great for most general applications, and comfortable and easy to use
	B-0108-C	JeTSpray Low Flow Ergonomic Spray Valve	0.65 GPM (2.5 Lpm)	4.6 Ozf (130 Gramf)	Lowest flow rate of the B-0108 spray valves and most ergonomic of any commercial brand	Rinsing trays and plates without baked-on residue. Choose this spray valve when you need an ergonomic and ultra-low flow rate and where employees use one for for extended periods

Spray Valve Assemblies using the B-0107 (1.15 GPM) Spray Valve, the B-0107-C Ultimate Low Flow Spray Valve (0.65 GPM) and the B-0108 JeTSpray Valve (1.07 GPM)

B-0107 Pre-Rinse Spray Valve

- 1.15 GPM (4.35 Lpm) at 60 PSI
- Spray force 7.5 Ozf (212 Gramf)
- Connects directly to T&S flexible stainless steel hose with grip handle
- Designed for heavy use in commercial kitchens
- Self-closing cartridge shuts off when handle is released
- Includes hose washer and hold-down ring (000907-45)
- 3/4"-14 UN male thread inlet

B-0107-M Master Box of (12)

B-0107 Spray Face (1.15 GPM)

DID YOU KNOW?
70 years ago, the T&S Brass **B-0107** was the first spray valve introduced to the foodservice plumbing market

B-0107 Spray Valve Exploded View

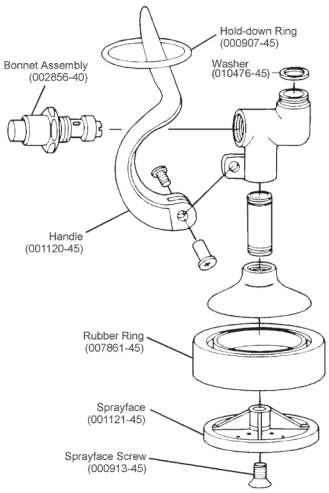

B-0107-035 Pre-Rinse Spray Valve

- 1.15 GPM (4.35 Lpm) at 60 PSI
- Spray force 7.5 Ozf (212 Gramf)
- 35° angle spray valve head
- Connects directly to T&S flexible stainless steel hose with grip handle
- Designed for heavy use in commercial kitchens
- Self-closing cartridge shuts off when handle is released
- Includes hose washer and hold-down ring (000907-45)
- 3/4-14 UN male thread inlet

B-0107-090 Pre-Rinse Spray Valve

- 1.15 GPM (4.35 Lpm) at 60 PSI
- Spray force 7.5 Ozf (212 Gramf)
- 90° angle spray valve head
- Connects directly to T&S flexible stainless steel hose with grip handle
- Designed for heavy use in commercial kitchens
- Self-closing cartridge shuts off when handle is released
- Includes hose washer and hold-down ring
- 3/4-14 UN male thread inlet

B-0107-QD Pre-Rinse Spray Valve

- 1.15 GPM (4.35 Lpm) at 60 PSI
- Spray force 7.5 Ozf (212 Gramf)
- Pre-rinse spray valve with quick-disconnect
- Connects directly to T&S hose reels
- Includes hose washer and hold-down ring
- Includes handle (002881-40) and stainless steel quick-disconnect (AW-5B)
- 3/8" NPT female inlet
- Requires (017960-25) adapter to connect to T&S hoses with 7/8-20 UN female ends (sold separately)

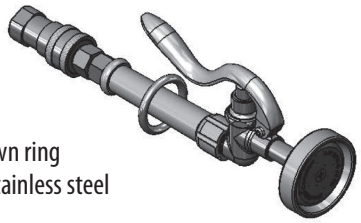

B-0107-C Ultimate Low Flow Spray Valve

- 0.65 GPM (2.5 Lpm) at 60 PSI
- Spray force 4.4 Ozf (125 Gramf)
- High performance fan jet with knife action spray
- Can be used with any T&S pre-rinse assembly instead of B-0107 spray valve
- Significantly saves water and energy
- 3/4-14 UN male thread inlet
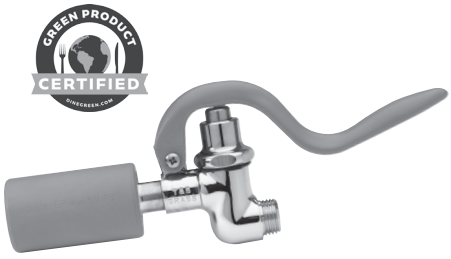
B-0107-CM Low flow spray valve Master Box (12)