5015AB

DZR Lead Free Brass PEX Ball Valve

Feature

400# WOG
DZR lead free brass body
F1960 full port
Barb (F1960) x Barb (F1960)
PEX ends (ASTM F1960)
Chrome plated ball
Virgin PTFE seats
Blow-out proof stem
Double NBR O-ring packing
CSA B125.14
AB1953, NSF/ANSI 61 & 372 certified

Avaialbe in the following options:
- with drain (5015ABD)
- with mounting foot (5015ABF)
- with drain & mounting foot (5015ABDF)
- with wing handle (5015ABW)

NSF/ANSI 61 & 372

DZR Dezincification Resistant

Certified LEAD FREE

Pressure/ Temperature rating	
300 psi from 15 °F to 160 °F	150 psi max. at 200 °F

Material

	Part	Material	Specification
1	Body	DZR Lead Free Brass	ASTM B927 C27453
2	End piece	DZR Lead Free Brass	ASTM B927 C27453
3	Ball	DZR Lead Free Brass / Cr plated	ASTM B927 C27453
4	Seat	PTFE	PTFE
5	Stem	DZR Lead Free Brass	ASTM B927 C27453
6	O-ring	NBR	NSF approved
7	Handle	Steel / Dacromet® plated	ASTM A36
8	Handle nut	Steel / Zn plated	ASTM A36

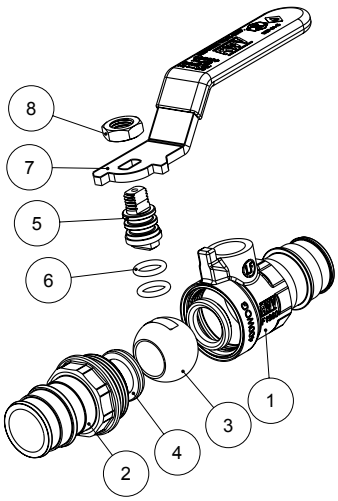

Dimension, Cv, Weight

Size	A [in]	H [in]	L [in]	P [in]	Wt. [lb]
½"	2.48	1.38	3.19	0.39	0.28
⅝"	3.07	1.38	3.19	0.39	0.43
¾"	2.48	1.77	3.58	0.50	0.44
1"	3.86	1.77	3.58	0.73	0.68
1¼"	4.63	2.03	4.96	0.94	1.16
1½"	5.63	2.24	4.96	1.22	1.62
2"	6.67	2.70	5.55	1.46	2.78
2½"	8.96	3.07	5.55	1.95	5.08
3"	10.81	3.90	7.91	2.44	8.92

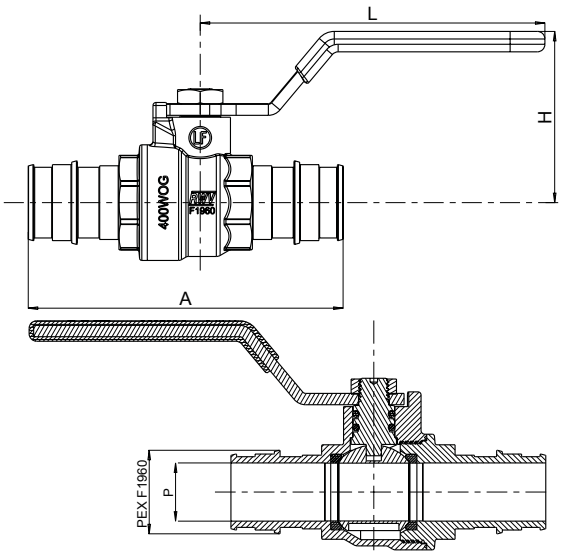

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Drawings, photos and data are provided for information only and subject to change without notice. No part of this document may be reproduced, copied, modified or adapted, without the prior written consent of the copyright owner, unless otherwise indicated.
The Drinking Water Act has defined lead free as having the average wetted surface ratio of the fixture to contain less than .25% of lead per volume.

© 2020 Red-White Valve Corp. All Rights Reserved