SCI
An ASC Engineered Solution

QuickBite™

No special tools required. No gluing, crimping or soldering required.

LEAD FREE

QuickBite™ valves and fittings are the simplest connectors to use.

1 - Clean the tube
2 - Press on the QuickBite™ fitting or valve
3 - DONE! No leak seal

QuickBite™ Quick Facts:

- Fittings certified to 200 PSI and 180° F
- Works with PEX, CPVC and copper tubing
- PEX stiffener pre-installed - Easy to remove for PVC or Copper installations
- Lead-free brass
- Full flow
- Fittings & valves are removable and reusable
- Easy-to-follow instructions are available at www.smithcooper.com/QR1 or by scanning the QR code on the back of every bag

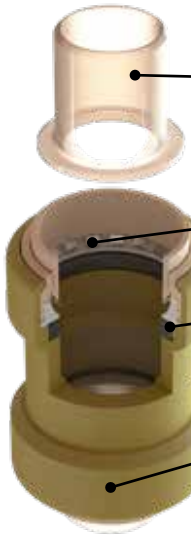

Fig. QBBV - Valve

Size in	Part Number	Packing		Weight lb
		Inner	Master	
1/2	QBBV004	10	20	0.408
3/4	QBBV006	10	20	0.598
1	QBBV010	5	10	1.152

LEAD FREE



Fig. 36CP1L – Coupling

Size in	Part Number	A in	Packing Inner	Packing Master	Weight lb
1/8	36CP1001L	0.80	70	1120	0.1
1/4	36CP1002L	0.97	40	640	0.1
3/8	36CP1003L	1.05	50	600	0.1
1/2	36CP1004L	1.29	40	320	0.1
3/4	36CP1006L	1.43	50	200	0.2
1	36CP1010L	1.68	25	100	0.4
1-1/4	36CP1012L	1.86	20	80	0.6
1-1/2	36CP1014L	1.92	12	48	0.8
2	36CP1020L	2.20	12	24	1.3
2-1/2	36CP1024L	2.88	8	16	2.6
3	36CP1030L	3.18	8	16	3.7
4	36CP1040L	3.69	-	6	5.8



Fig. 36RC1L – Reducing Coupling

Size in	Part Number	A in	Packing Inner	Packing Master	Weight lb
1/4 x 1/8	36RC1002001L	0.88	50	600	0.08
3/8 x 1/8	36RC1003001L	0.92	35	420	0.1
3/8 x 1/4	36RC1003002L	1.01	40	480	0.1
1/2 x 1/8	36RC1004001L	1.13	50	400	0.1
1/2 x 1/4	36RC1004002L	1.13	50	400	0.1
1/2 x 3/8	36RC1004003L	1.17	40	320	0.1
3/4 x 1/8	36RC1006001L	1.24	35	280	0.1
3/4 x 1/4	36RC1006002L	1.24	30	240	0.2
3/4 x 3/8	36RC1006003L	1.24	50	200	0.2
3/4 x 1/2	36RC1006004L	1.36	60	240	0.2
1 x 1/4	36RC1010002L	1.49	45	180	0.3
1 x 3/8	36RC1010003L	1.49	30	120	0.4
1 x 1/2	36RC1010004L	1.49	30	120	0.3
1 x 3/4	36RC1010006L	1.56	25	100	0.4
1-1/4 x 1/2	36RC1012004L	1.65	25	100	0.6
1-1/4 x 3/4	36RC1012006L	1.65	25	100	0.6
1-1/4 x 1	36RC1012010L	1.77	15	60	0.5
1-1/2 x 1/2	36RC1014004L	1.8	15	60	0.7
1-1/2 x 3/4	36RC1014006L	1.8	15	60	0.8
1-1/2 x 1	36RC1014010L	1.8	15	60	0.6
1-1/2 x 1-1/4	36RC1014012L	1.89	12	48	0.9
2 x 1/2	36RC1020004L	2.03	12	48	1.2
2 x 3/4	36RC1020006L	2.03	12	48	1.2
2 x 1	36RC1020010L	2.03	12	48	0.9
2 x 1-1/4	36RC1020012L	2.03	14	28	1.3
2 x 1-1/2	36RC1020014L	2.06	12	24	1.0
2-1/2 x 1-1/2	36RC1024014L	3.25	-	25	2.2
2-1/2 x 2	36RC1024020L	3.25	-	25	2.4
3 x 1	36RC1030010L	3.69	-	20	2.5
3 x 1-1/4	36RC1030012L	3.69	-	20	2.1
3 x 1-1/2	36RC1030014L	3.69	-	20	2.3
3 x 2	36RC1030020L	3.69	-	20	3.6
3 x 2-1/2	36RC1030024L	3.69	-	12	3.9
4 x 2	36RC1040020L	4.38	-	10	6.0
4 x 2-1/2	36RC1040024L	4.38	-	10	5.9
4 x 3	36RC1040030L	4.38	-	6	6.5