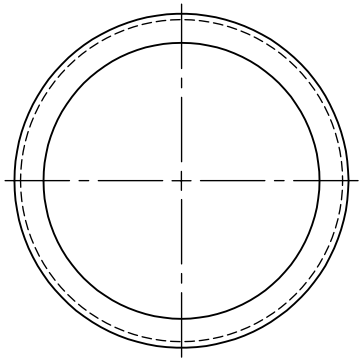

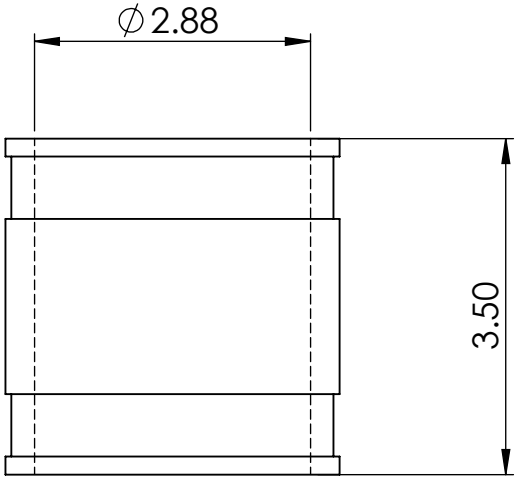

- Equipped with (2) 300SS Clamps
  Installation Torque 60 in-lb

Connect

2 1/2" PL, ST, Copper or 2" Duriron
to
2 1/2" PL, ST, Copper or 2" Duriron

The Information Contained in this Drawing is the Sole Property of Fernco. Any Reproduction in Part or in Whole without Written Permission is Prohibited.

Gasket Material - Black Flexible PVC, 60 Shore A
Clamps - 300 SS, Installation Torque 60 in-lb
Complies with - ASTM D5926, C1173
Min/Max Temp - (-)30 to 140°F
Drain, waste and Vent Only - No Pressure

Fernco Inc

Tolerance:
Angular ± 3°
.X = ± 0.09
.XX = ± 0.06

Dimensions are in Inches

Do Not Scale

SHEET 1 OF 1

Drawn by: AJD	Part Number: 1056-250
DATE: 10/22/2014	Description: 2 1/2" x 2 1/2" Coupling