LASCO® Fittings, Inc.

SUBMITTAL SHEET

ULTRAFIX COMPACT REPAIR COUPLING

Slip x Spigot

JOB NAME	
JOB LOCATION	
ENGINEER	
CONTRACTOR	
TAG	
PO NUMBER	
REPRESENTATIVE	
WHOLESALE DISTRIBUTOR	

- *Compact Design for tight places*
- *Dual EPDM O-RINGs*
- *Seals throughout pistons full travel*
- *Can be used as Repair Coupling or an Expansion Joint*
- *NSF Certified*
- *Working Pressure: ½" - 2½" - 235 psi @ 73°F • 3" - 6" - 150 psi @ 73°F*

SPECIFICATIONS:

Maximum Working Pressure: ½" - 2½" - 235 psi @ 73°F
3" - 6" - 150 psi @ 73°F

ASTM D1784 - Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds

LISTINGS – NSF/ANSI Standard 61, Annex G: Drinking Water System Components Weighted average lead content of less than or equal to 0.25% and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953) NSF/ANSI Standard 14: Plastics Piping system components and Related Materials. Includes ANSI Standard 61, Annex G.

MATERIALS:

PVC Type 1 Cell Classification 12454-B

HOW TO ORDER:

PART #	SIZE (in)	Ctn Qty
CUF-005	½	36
CUF-007	¾	24
CUF-010	1	18
CUF-012	1¼	12
CUF-015	1½	12
CUF-020	2	8
CUF-025	2½	4
CUF-030	3	3
CUF-040	4	2
CUF-060	6	1

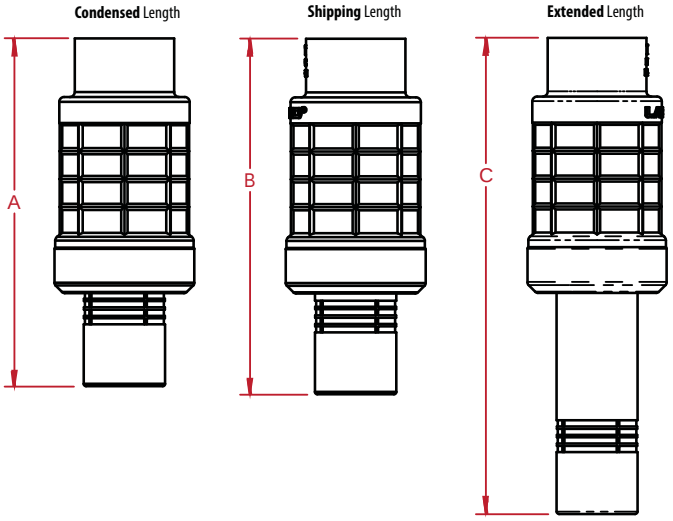

Size (inch)	Condensed Length (A)	Shipping Length (B)	Extended Length (C)
½	4.92	5.04	6.87
¾	5.38	5.51	7.64
1	5.62	5.75	7.69
1¼	6.58	6.83	9.08
1½	6.73	6.98	9.52
2	8.30	8.55	12.03
2½	12.75	N/A	17.00
3	13.50	N/A	18.00
4	15.00	N/A	19.75
6	18.50	N/A	26.25

414 Morgan Street • Brownsville, TN 38012
(731) 772-3180 | www.lascofittings.com

This specification is provided for reference only. LASCO Fittings, Inc reserves the right to change nay portion of this specification without notice and without incurring obligation to make such changes to LASCO products previously or subsequently sold. Please visit our website www.lascofittings.com for the most current information.

AALBERTS INDUSTRIES