4515 East 139th Street
Grandview, MO 64030
(800) 362-9055
Fax (800) 362-1463
www.PRIER.com

C-144/244 Series Freezeless Wall Hydrant

Application

With Anti-Siphon Vacuum Breaker

- **Residential**
- **Freezeless**
- **Anti-Siphon**
- **Backflow Check Valve**

C-244 Loose Key Design

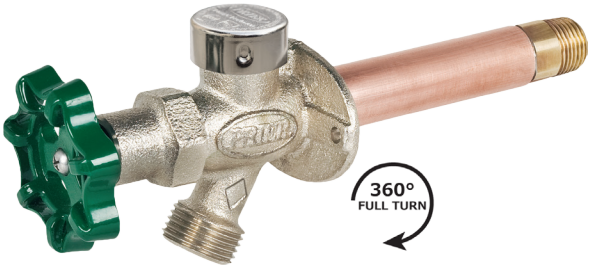

PRIER C-144 provides a year round source of water to areas of structures that are subject to freezing temperatures. The hydrant valve is connected to the supply piping in the heated portion of the structure, eliminating the possibility of freezing. Ordering the C-244 gives you the same style hydrant but with a vandal proof extended lockshield and operating key.

The PRIER C-144 has all the characteristics of the historically proven C-134 with the added protection of an anti-siphon vacuum breaker and backflow check valve. It is available from stock in lengths from close coupled to 24", longer sizes are available on request.

Features

- ASSE 1019 and C-UPC approved
- Anti-siphon vacuum breaker with backflow check valve
- Aluminum vacuum breaker cap with increased durability
- Integral cast flange with built-in drainage pitch
- Enclosed screw holes easily secure mounting screws
- Solid brass body, valve stem cap, seat and stem ends
- Satin nickel plated body maintains attractive finish
- Stainless steel seat washer screw and handle screw
- Powder coated cast aluminum handle
- Durable ACME threads secure stem at seat end
- Lock shield cap for stronger valve design
- AFG teflon with graphite packing for easy maintenance
- Standard "OO" size seat washer
- Spout aligning mark
- Slim seat inlet for easier installation

Ordering

C-1 44 D 10

Operator
1- Handle Operated
2- Vandal Proof Lockshield

Inlet
D- ½" MPT x ½" SWT
F- ¾" MPT x ¾" SWT
S- ½" SWT x ¾" Push-On
T- ¾" MIP x ½" FIP
W- ½" Wirsbo PEX®
C- ½" CPVC Glue-In
X- ½" Crimp PEX
FX- ¾" Crimp PEX
FW- ¾" Wirsbo PEX®

Length
CC- Close Coupled
04- 4" Insertion
06- 6" Insertion
08- 8" Insertion
10- 10" Insertion
12- 12" Insertion
14- 14" Insertion
16- 16" Insertion
18- 18" Insertion
20- 20" Insertion
22- 22" Insertion
24- 24" Insertion
XX- Special Size

Inlet Styles



D Style
½" MIP x ½" SWT



S Style
½" SWT x ¾" Push-On



X Style
½" Crimp PEX



W Style
½" Wirsbo® PEX



C Style
½" CPVC Glue-In



T Style
¾" MIP x ½" FIP



F Style
¾" MIP x ¾" SWT

FX Style
¾" Crimp PEX



FW Style
¾" Wirsbo® PEX