American Standard
Style That Works Better

CADET ELONGATED PRESSURE-ASSISTED TOILET 1.6 gpf / 6.0 Lpf

VITREOUS CHINA

CADET ELONGATED PRESSURE-ASSISTED TOILET 1.6 gpf/ 6.0 Lpf

❑ **2462.016**
- Vitreous china
- Low-consumption (1.6 gpf/6.0 Lpf)
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Elongated bowl
- Pressure-assisted siphon jet flush action
- Fully-glazed 2-1/8" trapway
- 10 x 12" water surface area
- Metal chrome trip lever
- Close-coupled flushometer tank*
- Speed Connect® tank/bowl coupling system
- 2 bolt caps
- 100% factory flush tested
- 12" Rough-in

❑ **3481.016** Bowl with two bolt caps
❑ **3481.001** Same as above, Universal Bowl
❑ **4142.016** Tank complete with coupling components

Nominal Dimensions:
768 x 521 x 743mm
(30-1/4" x 20-1/2" x 29-1/4")

Fixture only, seat and supply by others

Recommended working pressure range
25 psi - 80 psi

Alternate Configurations Available:
❑ **4142.600** Tank and tank cover only with tank cover locking device
❑ **4142.800** Tank and tank cover only with right hand trip lever
❑ **4142.900** Tank complete with right hand trip lever and tank cover locking device

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous China Fixtures

To Be Specified:
❑ Color: ❑ White ❑ Bone ❑ Linen ❑ Black
❑ Seat: American Standard #5324.019 “Rise and Shine” (with easy to clean lift-off hinge system) solid plastic closed front seat with cover.
❑ American Standard #5321.110 EverClean® seat with Slow Close snap-off hinges.
❑ Alternate Seat:
❑ Supply with Stop:

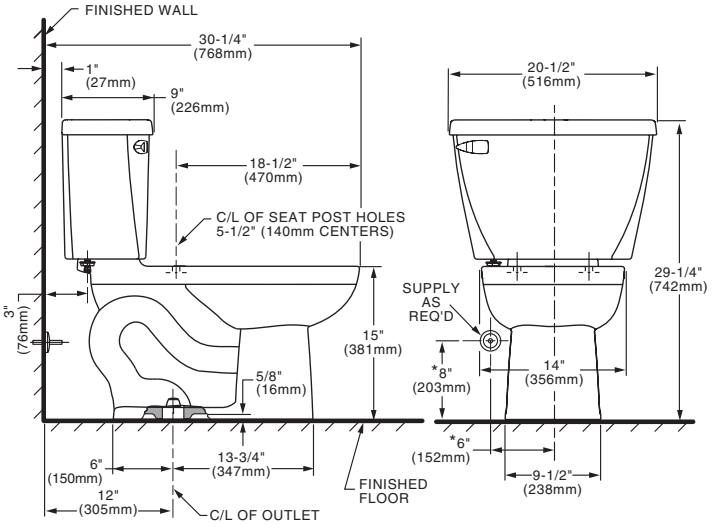

NOTES:
THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2-2008 / CSH B45.1-08. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2010 AS America Inc.