YORKVILLE™ FloWise® RIGHT HEIGHT® ELONGATED PRESSURE-ASSISTED TOILET 1.1 gpf / 4.2 Lpf

BARRIER FREE **VITREOUS CHINA**

YORKVILLE™ FloWise® RIGHT HEIGHT® ELONGATED PRESSURE-ASSISTED TOILET 1.1 gpf / 4.2 Lpf

❑ **2878.100**
- Vitreous china
- **Floor-mounted, back-outlet toilet**
- High Efficiency, Ultra Low-consumption (1.1 gpf/4.2 Lpf)
- EverClean® surface inhibits the growth of stain and odor-causing bacteria, mold, and mildew on the surface
- Meets EPA WaterSense® criteria
- Elongated 16-1/2" high bowl rim for accessible applications
- Pressure-assisted siphon jet flush action
- Fully-glazed 2-1/8" trapway
- 10 x 12" water surface area
- Close-coupled Flushometer tank*
- Metal chrome trip lever
- Speed Connect® tank/bowl coupling system
- Sanitary dam on bowl
- 4 bolt caps
- 100% factory flush tested

❑ **3703.100** Elongated 16-1/2" high bowl with 4 bolt caps
❑ **3703.001** Same as above, Universal Bowl
❑ **4142.100** Flushometer tank complete with coupling components

Nominal Dimensions:
752 x 516 x 780mm (29-3/4" x 20-1/2" x 30-3/4")

Fixture only, seat and supply by others
Recommended working pressure range
25 psi - 80 psi

Alternate Configurations Available:
❑ **4142.601** Tank and tank cover only with tank cover locking device
❑ **4142.801** Tank and tank cover only with right hand trip lever
❑ **4142.901** Tank complete with right hand trip lever and tank cover locking device

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HET's

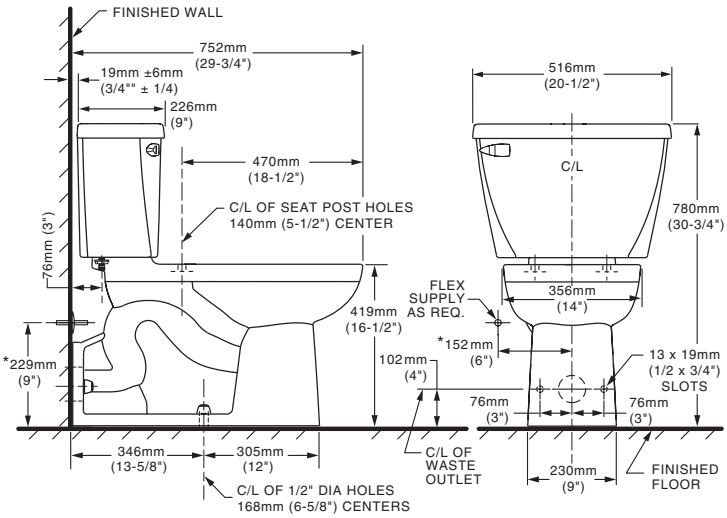

NOTES:
WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-FELT (WAX RING NOT RECOMMENDED).
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
DISTANCE FROM FLOOR TO CLOSET FLANGE CENTERLINE (ROUGH-IN) MUST BE 4" (102 MM) WITH FLANGE SURFACE FLUSH TO 1/16" (1.5MM) MAX. BEYOND FINISHED WALL.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED. FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2-2008 / CSH B45.1-08. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

To Be Specified:
❑ Color: ❑ White ❑ Bone ❑ Linen
❑ Seat: American Standard #5901.100.020
❑ Supply with Stop:

Certified by IAPMO R&T

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES - CHECK LOCAL CODES.

© 2017 AS America Inc.

PART OF LIXIL