



PRIMARY SIDE

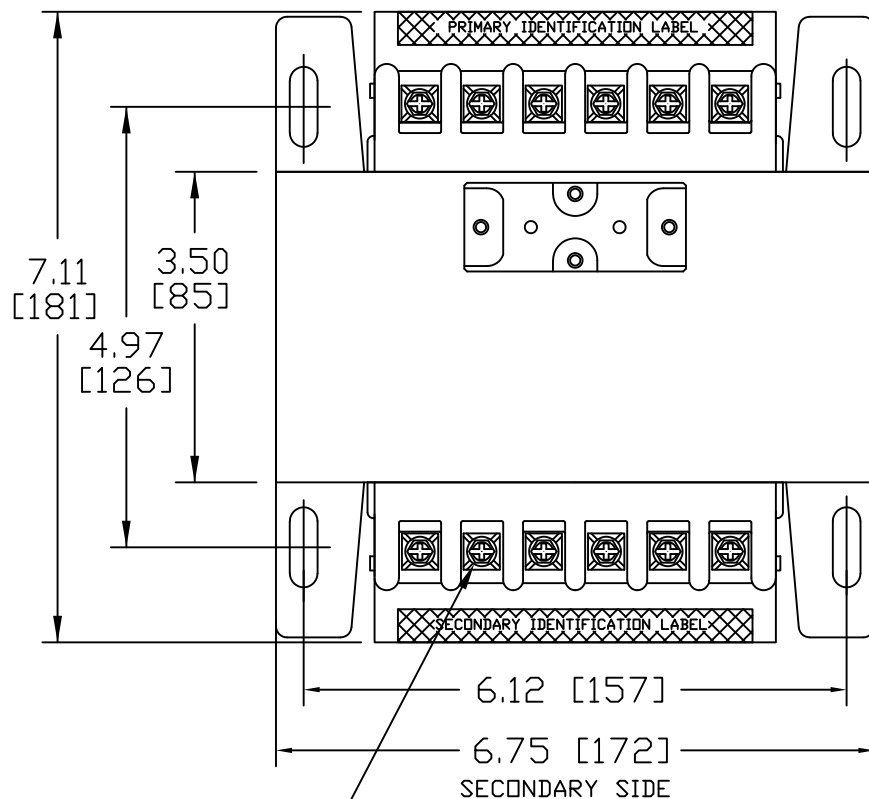


10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

IND. BOX LABEL

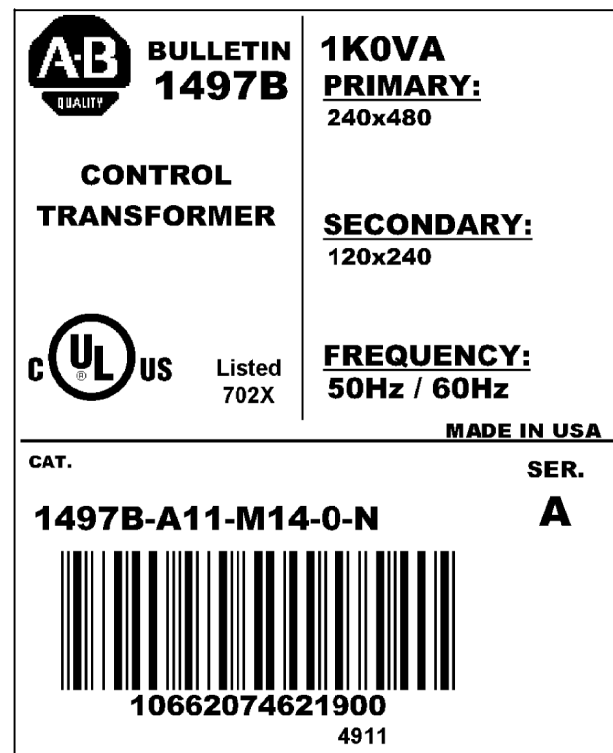

Transformer Specifications

PRIMARY VOLTAGE(S)	240x480
SECONDARY VOLTAGE(S)	120x240
RATED V.A.	1000
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	38.2 LBS

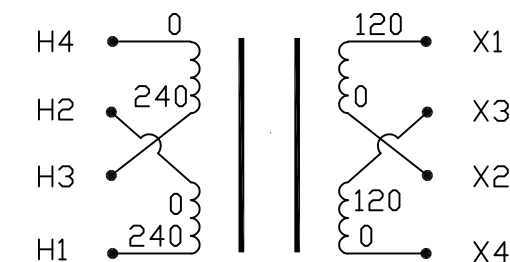PRIMARY SIDE
N/A •SECONDARY SIDE
• N/A

N/A •

• N/A



CONNECTION DIAGRAM

NOTE:

1. ALL MEASUREMENTS IN INCHES (MM)
2. TORQUE ALL LEAD TO TERMINAL CONNECTIONS AT 30 IN.LBS.

SECONDARY SIDE


PRIMARY SIDE

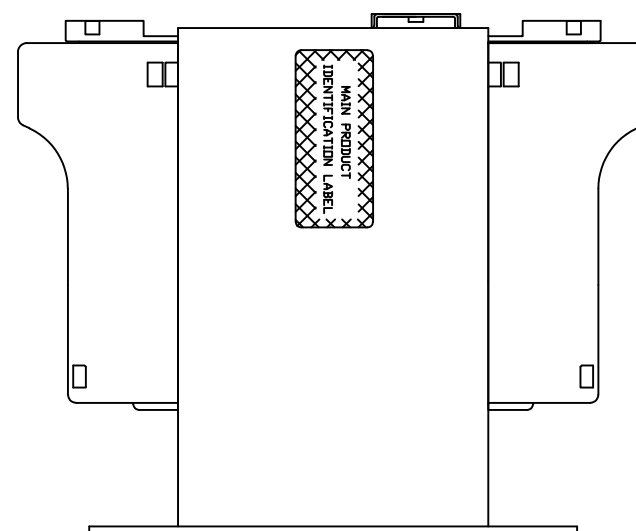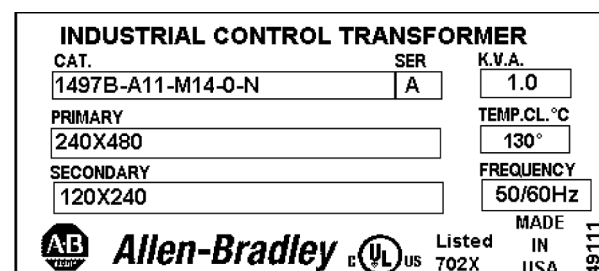MAIN PRODUCT
IDENTIFICATION LABEL


LABEL 40022-417

USE MIN 105°C INSULATED WIRE
(1) OR (2) No. 18-12 AWG STR. Cu WIRE ONLY
TORQUE TERMINALS TO 30 LB-IN

PRIMARY IDENTIFICATION LABEL

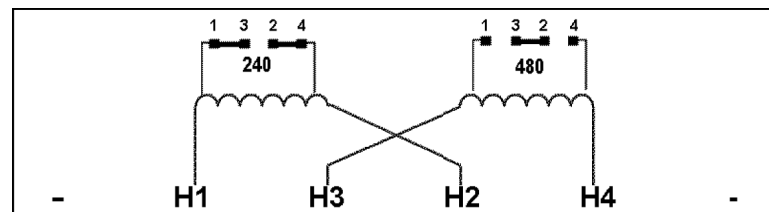

SECONDARY IDENTIFICATION LABEL

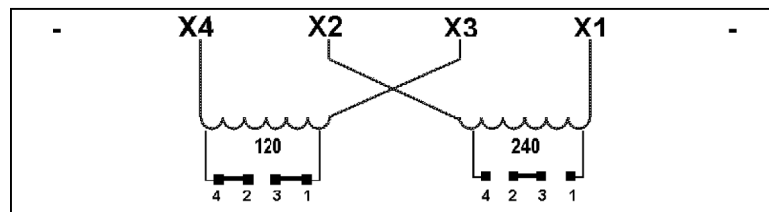

PACKAGED ACCESSORIES

1	2 PAIR OF JUMPERS
-	-
-	-
-	-
-	-

DATE	10/1/09	DRAWN	J.G.V.	CHECKED	APPROVED
RELEASE DATE		CUSTOMER PART NO.	ROCKWELL	#1497B-A11-M14-0-N	
SIZE	C	SCALE	NONE		

	REMOVE TEST SPECS. (NOW ON COIL DWG)	PJA	12/5/11
B	REDRAWN	AN003984	J.V 10/1/09
ECL	REVISIONS	BY	DATE

LABEL 40022-417