

SPECIFICATION SHEET

SIZE: 8.5 x 11.0
PRINTED 1 SIDES BLACK

NOTE: USE ONLY APPROVED ARTWORK!

C S						SUPPLEMENTARY DRAWING	
						MATERIAL	
UPDATED DRAWING FORMAT; REMOVED REFERENCES TO MODELS 742SNHT AND 742WHNT		SCJ	05/17/07	ECN	007856	SPEC SHEET F/742 NUTONE SERIES FANS	
BRAND LOGO CHANGE		JEF	07/13/05	ECN	006664	TITLE	
RELEASED		SCJ	01/14/04	ECN	005770	PART NUMBER	
DESCRIPTION		BY	DATE	CHANGE NO.	REV.	99043343C	
MUST BE ROHS COMPLIANT		CLASSIFIED CHARACTERISTIC SYMBOLS				DO NOT SCALE DRAWING	
 CRITICAL - LIKELY TO RESULT IN HAZARDOUS OR UNSAFE CONDITION (SAFETY RELATED).		 MAJOR - LIKELY TO CAUSE SERIOUS DAMAGE TO THE PRODUCT. SIGNIFICANTLY REDUCE THE FUNCTION, OR CAUSE UNACCEPTABLE APPEARANCE.				UNLESS OTHERWISE SPECIFIED: LINEAR DIMENSIONS ARE IN INCHES TOLERANCE = ±0.015" ANGULAR DIMENSIONS ARE IN DEGREES TOLERANCE = ±1.0°	

DESCRIPTION

LIGHT FIXTURE:

- Corrosion resistant, oil-rubbed bronze finish
- Frosted melon glass shade
- Close mount design
- Uses two 60 Watt maximum, type A, medium base bulbs. Bulbs not included.
- Vent openings in fixture base for exhaust fan
- Light fixture assembly is plug-in and removable

BLOWER:

- Plug-in permanently lubricated motor
- Polymeric blower wheel

HOUSING:

- Rugged, 26-gage galvanized steel construction
- Sturdy key-holed mounting brackets for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter

NOTE: For installation in ceilings up to 12/12 pitch.

U.L. Listed for use in insulated ceilings (Type I.C.)

Use supply wiring rated for at least 90° C




SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	1.6	70	2.0	4" Round



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers.

Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

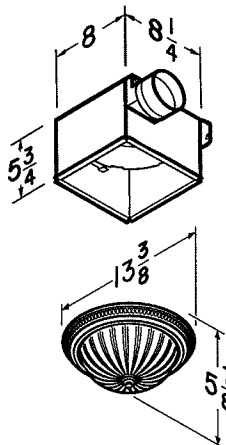


INSTALLATION

Complete installation instructions are included with each Decorative Light / Fan.

Decorative Light / Fan

MODEL 742RBNT

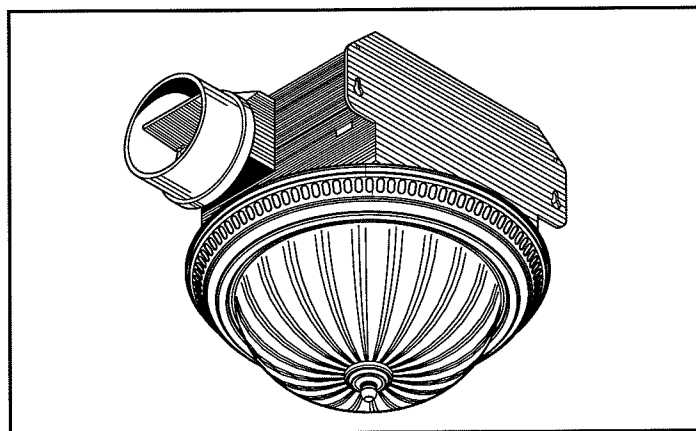

ARCHITECT'S SPECIFICATION

- Decorative Light / Fan shall be NuTone Model 742RBNT as manufactured by NuTone according to specifications listed:
- Unit shall have galvanized steel housing with dual integral mounting brackets. It shall be ducted to a roof or wall cap.
- Blower assembly shall be removable and have a permanently lubricated motor.
- Light fixture assembly shall be plug-in, removable and include a frosted melon glass shade and a corrosion-resistant base with oil-rubbed bronze finish.
- Lamps shall be two 60 Watt maximum, type A, medium base, incandescent.
- Air delivery to be no less than 70 cfm and sound level no greater than 2.0 sones. Air and sound ratings shall be certified by HVI.
- Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.)

NuTone, Inc., 4820 Red Bank Road, Cincinnati, OH 45227 (1-888-543-8687)

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date