


NOTES: UNLESS OTHERWISE SPECIFIED:

1. DIMENSIONS ARE IN INCHES [MILLIMETERS].

2. CONDUCTOR SIZE: 10 AWG TO 8 AWG.

M-9090

1

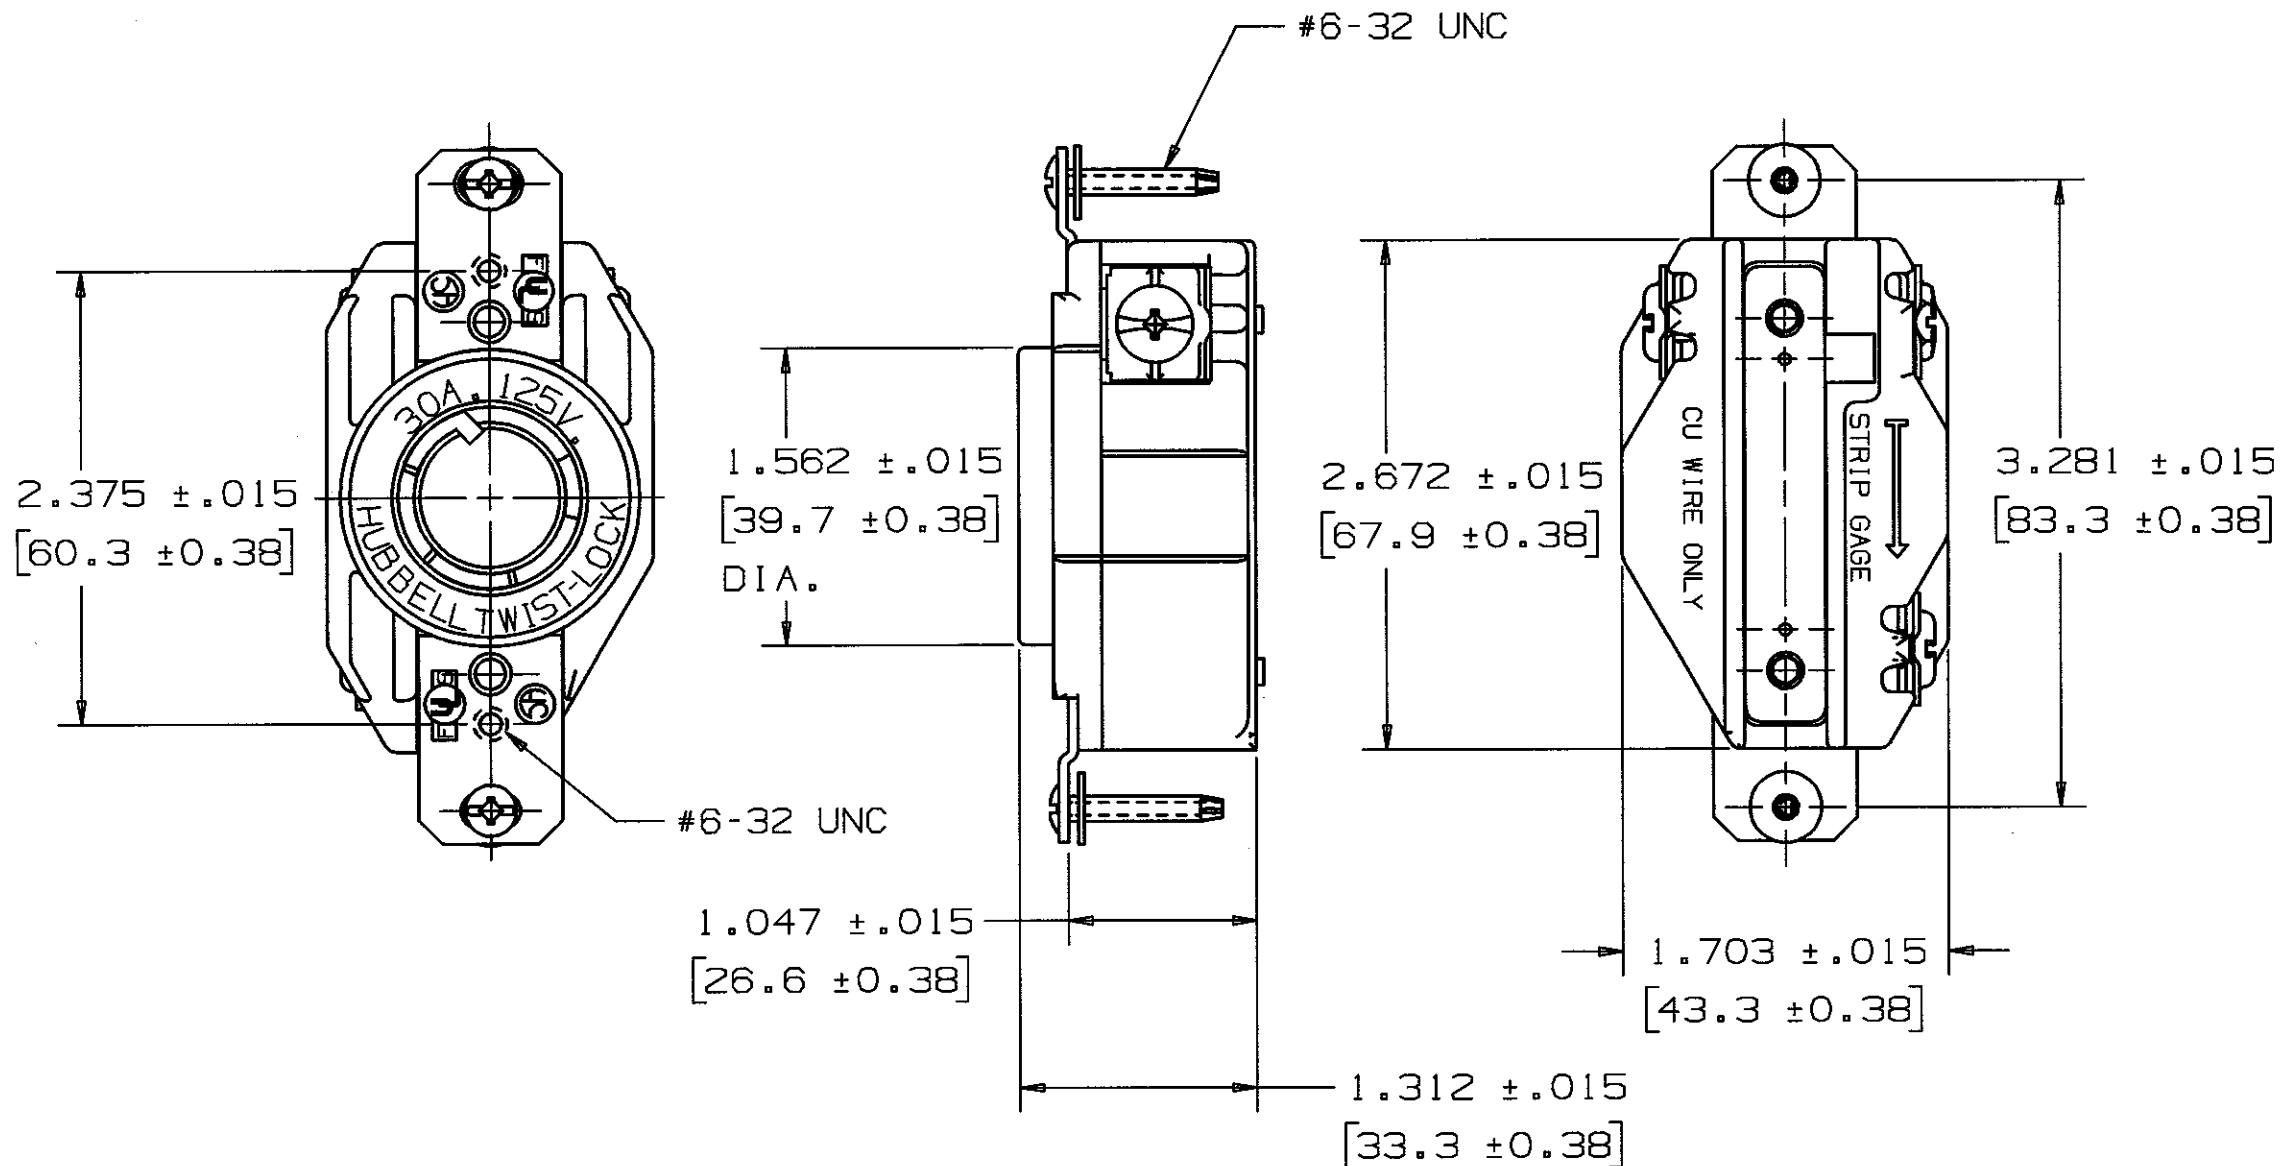

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	POLYESTER	BLACK
COVER	NYLON	BLACK
CONTACT SPRING	.040 BRASS	
CLAMP	.040 BRASS	
GR. SHUNT	.015 BRASS	
BINDING SCREWS	BRONZE	*
HEX.HD.BIND.SCREW	BRONZE	GREEN
BACK PLATE	.040 BRASS	NICKEL
END PLATES	STEEL	NICKEL
RIVET	BRASS	
SCREWS, MOUNTING	STEEL	ZINC

* WHITE FINISH ON NEUTRAL SCREW WHEN USED

1	RELEASED PER DCN 10754	5/22/03
SYM	REVISIONS	APP DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 30A, 2 POLE 3 WIRE TWIST LOCK RECEPTACLES

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS $\pm 1/64$
DECIMALS $\pm .005$
ANGLES $\pm 2^\circ$

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY CAC APP. BY
TR. BY SCALE NONE
CHK'D BY DATE 5/22/03

CATALOG NO.	CONFIGURATION	RATING	UL	CSA	FED SPEC.
L530R	NEMA L5-30R	30A, 125V	YES	YES	YES
L630R	NEMA L6-30R	30A, 250V	YES	YES	YES