
Oval Entry 8P8C RJ-45 Plug (Stranded Wires)

PROBLET SPECIFICATION

Package includes:

A. Oval Entry 8P8C Plug, 100 pcs

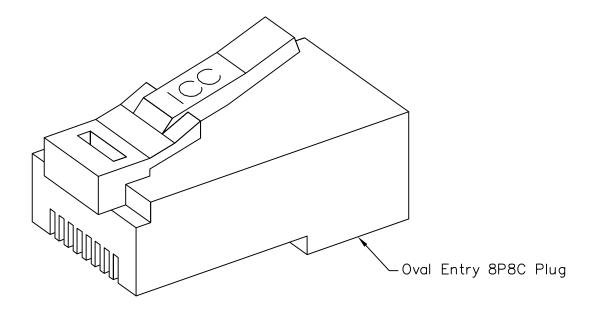


Features and Benefits:


- Designed for 8-position 8-conductor, stranded wires, round line cord entry
- Ideal for customization of cords for voice or data applications
- Accepts 28~24 AWG stranded wires
- Used with ICACSCT845 and ICACSCT864 crimping tool
- UL recognized


PLUG, 8P8	C, OVAL ENTF	RY, STRANDED,	100 PK
ITEM NO.	ICMP8P8CRD	REV.	Α
DWG NO.	PSMP8P8CRD	PAGE	NO. 1





CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com











NOTE: UNLESS OTHERWISE SPECIFIED

- 1. ELECTRICAL:
 - A. UL APPLICATIONS: RATED 2A, 150V
 - B. DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC
 - C. INSULATION RESISTANCE: 500 MOHMS
 - D. TERMINATION RESISTANCE: 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING
- 2. MECHANICAL:
 - A. CABLE-TO-PLUG TENSILE STRENGTH: 20 LBS [89N] MIN
 - B. DURABILITY: 200 MATING CYCLES
- 3. MATERIAL & FINISH:
 - A. HOUSING: PC, UL 94V-2
 - B. COLOR: CLEAR
 - C. CONTACT: HIGH STRENGTH COPPER ALLOY, GOLD PLATING OVER 100 MICRO INCH NICKEL
 - D. GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
 - E. CONDUCTOR: 24, 26, 28 AWG STRANDED

	PLUG, 8F	PSC, OVAL	ENTRY,	STRAI	NDED,	100 PK
П						

ITEM NO.	ICMP8P8CRD	REV. A
DWG NO.	PSMP8P8CRD	PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com